


EVERGREEN™ VENTO™ FCM30K

30,000 W Bulk Front End

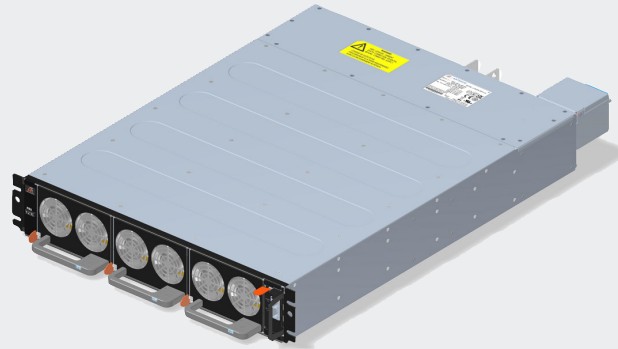

Advanced Energy's FCM30K series provides for a very wide range of AC-DC embedded power requirement. Featuring high build quality with robust screw terminals, long life, and typical full-load efficiency of greater than 95.5%, these units are ideal for use in industrial and medical applications. They are backed by a comprehensive set of industrial and medical safety approvals and certificates. Variable-speed "smart fans" draw on software controls developed by Advanced Energy to match fan speed to the unit's cooling requirement and load current. Slowing the fan not only saves power but also reduces wear, thus extending its life.

SPECIAL FEATURES

- 30,000 W output power
- 86.4 mm H x 448 mm W x 595 mm L
- -40 to +50°C, for variants capable of operating up to 70°C, (+50°C to 70°C) power is derated
- 5 V at 1 A housekeeping
- High efficiency: >95.5% typical at full load
- Supports NFC Tag Application
- Semi F47 compliance (Tested at 480 VAC, 54.5 V 30 kW)
- Five-year warranty

COMPLIANCE

- EMI Class A, with 6 db margin
- EN61000 Immunity

SAFETY

- UL/IEC 62368-1
- CE LVD + RoHS (EN 62368-1 + RoHS)
- Demko CB Report for IEC 62368-1

AT A GLANCE

Total Power

30,000 W

Input Voltage

187 to 528 VAC, 3 Phase 3 Wire + PE

Number of Outputs

Single




ELECTRICAL SPECIFICATIONS

Input	
Input Range	187 to 528 VAC, 3 phase input, 3 wire + PE (corner ground not supported) 480 VAC (nominal)
Frequency	47 to 63 Hz, nominal 50/60 Hz
Input Fusing	Recommend external circuit breaker with 63 A rating.
Inrush Current	≤ 180 A peak at 480 VAC
Power Factor	0.98 typical, meets EN61000-3-12
Harmonics	Meets EN61000-3-12 requirements
Input Current	45 A RMS max input current at 480 VAC
Hold Up Time	> 12 ms minimum for at 30,000 W load > 20 ms minimum for at 18,000 W load
Efficiency	> 95.5% typical at full load, 480 VAC nominal
Power Line Transient Protection	Suitable MOV after input fuse for modules with added SPD (Surge Protective Device) within the shelf.
Isolation Voltage	Meets UL62368


Output		
Output Voltage	Main output: 54.5 VDC Standby output: 5 VDC	
Output Trimming Range	48 to 60 VDC	
Output Current	Main output at 550 A max Standby at 1 A available for system side	
Minimum Load	Main output at 0 A Standby at 0 A	
Output Ripple / Noise (PARD)	Main output: 1% of voltage setting Standby: 100 mV	Measured with 0.1 μF ceramic and 10 μF electrolytic capacitor on any output, 20 MHz
Output Turn On Overshoot	< 5% of voltage setting	
Transient Response	±5% of nominal output voltage	Load transient change of ±25% with 5% minimum load
Current Sharing	< 5% for 50%-100% load current	Main output: support shelf to shelf current sharing. Accuracy TBD. Standby: none
Max Number of Unit in Parallel	Contact AE technical support team	
Protections	UV/OV, OCP, OVP, OTP, ACUV, etc.	
Output Isolation	Default product has main output isolated (100 VDC) from PSU chassis and meets functional isolation requirements. Product with output ground terminated to chassis is available upon request.	

ELECTRICAL SPECIFICATIONS


Output Power Derating vs Input Line Voltage at -40°C to 50°C			
Input Voltage	48 V	54.5 V	60 V
480 VAC	26,400 W	30,000 W	30,000 W
440 VAC	26,400 W	30,000 W	30,000 W
400 VAC	26,400 W	27,600 W	27,600 W
380 VAC	26,100 W	26,100 W	26,100 W
360 VAC	24,400 W	24,900 W	24,900 W
346 VAC	24,000 W	24,000 W	24,000 W
240 VAC	16,400 W	16,400 W	16,400 W
208 VAC	13,700 W	13,700 W	13,700 W
187 VAC	12,000 W	12,000 W	12,000 W

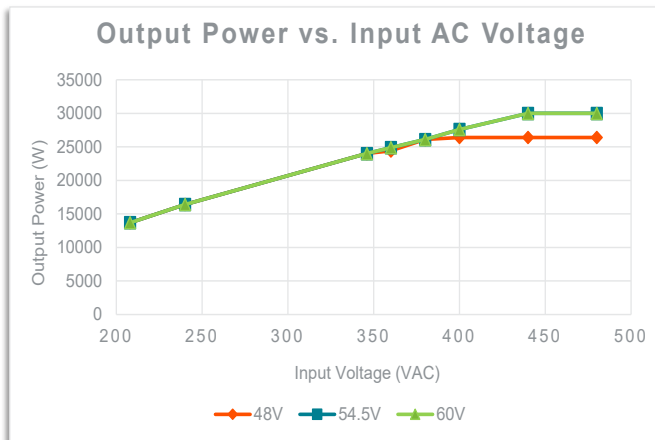

Output Power Derating vs Input Line Voltage @ 60°C			
Input Voltage	48 V	54.5 V	60 V
480 VAC	23,600 W	28,400 W	28,400 W
432 VAC	23,200 W	27,900 W	28,200 W
400 VAC	23,100 W	27,600 W	27,600 W
380 VAC	23,000 W	26,100 W	26,100 W
346 VAC	22,500 W	24,000 W	24,000 W
240 VAC	15,300 W	15,300 W	15,300 W
208 VAC	12,700 W	12,700 W	12,700 W
187 VAC	11,100 W	11,100 W	11,100 W

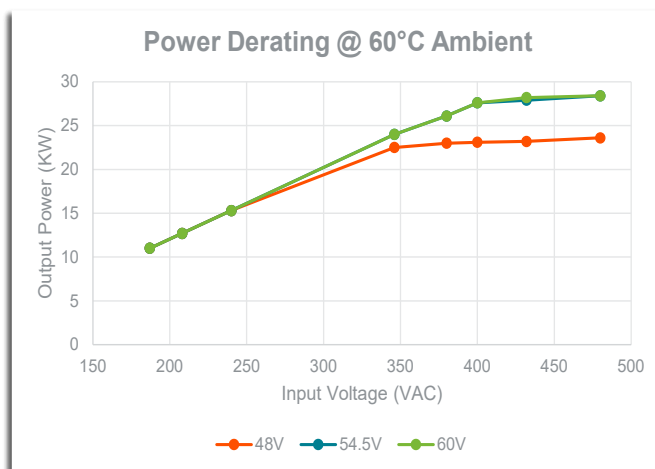

Output Power Derating vs Input Line Voltage @ 70°C			
Input Voltage	48 V	54.5 V	60 V
480 VAC	17,800 W	21,500 W	21,500 W
432 VAC	17,500 W	21,000 W	21,000 W
400 VAC	17,400 W	20,700 W	20,700 W
380 VAC	17,300 W	20,500 W	20,500 W
346 VAC	16,800 W	20,300 W	20,300 W
240 VAC	13,400 W	13,400 W	13,400 W
208 VAC	11,100 W	11,100 W	11,100 W
187 VAC	9,800 W	9,800 W	9,800 W

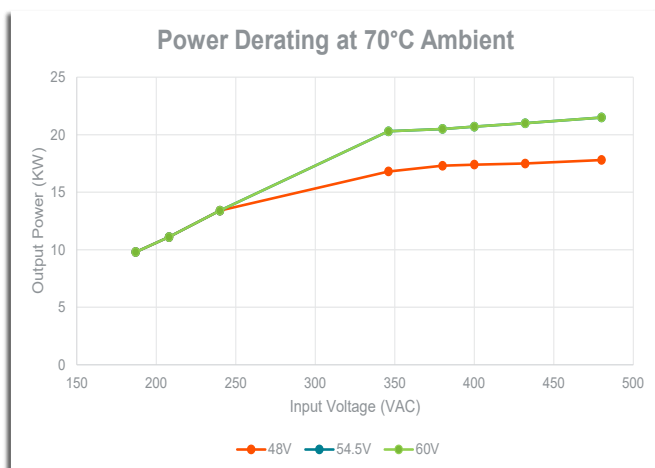


ELECTRICAL SPECIFICATIONS

Variant	Operating Temperature
FCM30K-SHF-L-W-P	-40°C to 50°C
FCM30K-SHF-L-W-T	-40°C to 50°C
FCM30K-SHF-L-W-P-R	-40°C to 70°C. Above 50°C, power is derated.
FCM30K-SHF-L-W-T-R	-40°C to 70°C. Above 50°C, power is derated.

For variants without PMI, FCM30K-SHF-L-W-P-R and FCM30K-SHF-L-W-T-R shelf can operate at temperatures up to 70°C (+50°C to 70°C with power derated).

FCM30K Efficiency @ 70°C	
Load	Efficiency
10%	91.00%
20%	93.00%
50%	96.00%
80%	95.80%
100%	95.50%

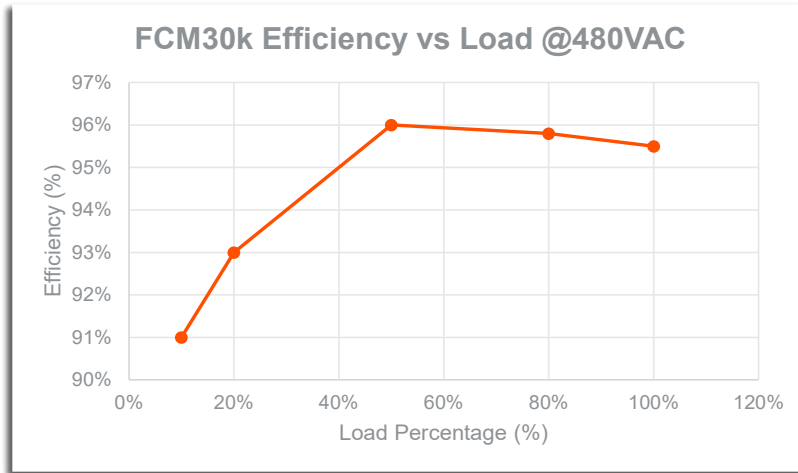

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature	-40°C to +50°C; Start at -40°C requires a 5 minutes operating warm-up. For variants capable of operating up to 70°C, +50°C to 70°C power is derated. Refer to ELECTRICAL SPECIFICATIONS section for power derating.
Storage Temperature	-40 to +85°C
Humidity	10% to 90% non-condensing, operating
Acoustic Noise	< 83 dBA at 30°C
Altitude	3000 m for 100% load
Shock	Operating Shock: 4 G, 22 msec, half-sine pulse Non-operating (empty): 12 G, 11 msec, half-sine pulse
Vibration	Operating Sinusoidal Vibration: 0.5 G acceleration, 1.5 mm amplitude, 5 to 500 Hz. Non-operating Sinusoidal Vibration: 1 G acceleration, 3.0 mm amplitude, 5 to 500 Hz. Package: MIL-STD-810G, Method 514.6 Procedure I, Cat 7, Table 514.6C-VII, General Purpose

SAFETY & EMC

Conducted/Radiated Emission	EN55032/CISPR32 Class A, 6 dB Margin
Surge	2KV DM; 4KV CM
Voltage Dips and Interruptions	EN61000-4-34
ESD	8 kV contact/15 kV air
Safety	UL/IEC/62368-1
Compliance Reports	UL 62368-1, Demko CB Report for IEC 62368-1, CE LVD + RoHS

ORDERING INFORMATION

Standard	Nominal Output Voltage	Trim Range	Max Current	Standby Output	Efficiency
FCM30K-SHF	54.5 VDC	48 to 60 VDC	550 A	5 V at 1 A	95.5%

FCM30K-SHF MODEL NUMBER SCHEME												
FCM30K-SHF-Y-X-A-B-C-4XX	-	X	-	A	-	B	-	C	-	D	-	4XX
Shelf Size (mm)		Module Output Code		Input Connector Option		Interface Type		Input Option Codes		Option Codes		Hardware Code
30000 W = 86.4 x 448 x 580		Per Module Voltage Code Below		T = Input Terminal Block		Blank = MODBUS/Artybus		Blank = PMI Added		Blank = No Option		4XX = Mod Codes
				P = Input Connection Plug (pluggable module)		C = CANopen		R = PMI Removed		1 = Conformal Coating		
						E = Ethernet				2 = Future Option		
						K = EtherCAT						
Voltage Range Y =						M = MODBUS TCP						
Code	Volts											
L	24-200			W								
M	300-500			Future								
H	850-1500			Future								

Example:


FCM30K-SHF-L-W-T-R = 30K Shelf, Low Voltage Range, W = 48-60 V, Input Terminal Block, PMI Removed

MECHANICAL DRAWINGS


FRONT 3D VIEW






Input Terminal Block Version REAR 3D VIEW

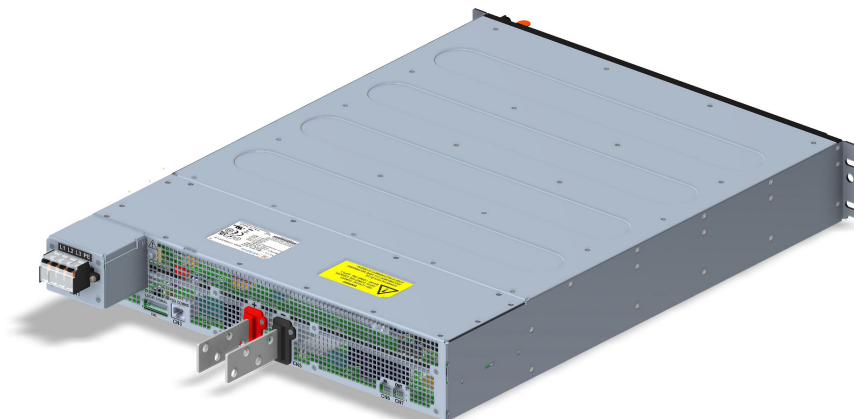

Input Pluggable Version REAR 3D VIEW

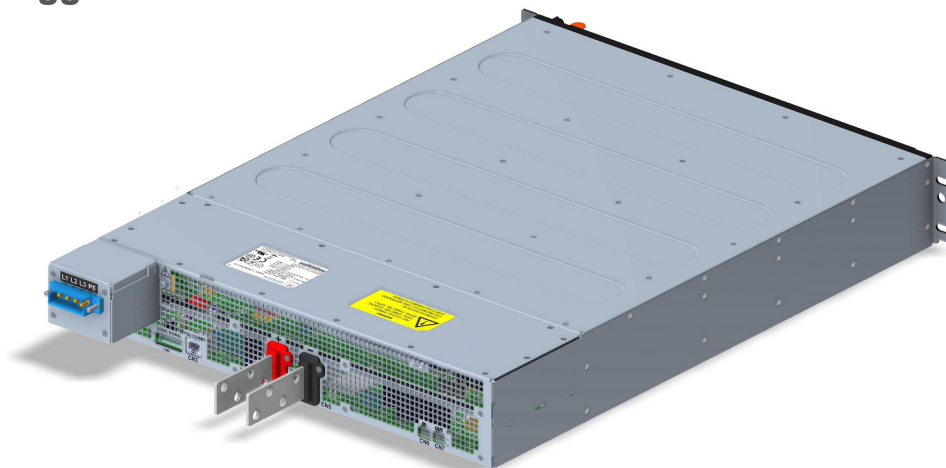


MECHANICAL DRAWINGS

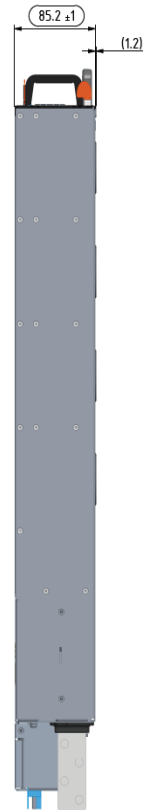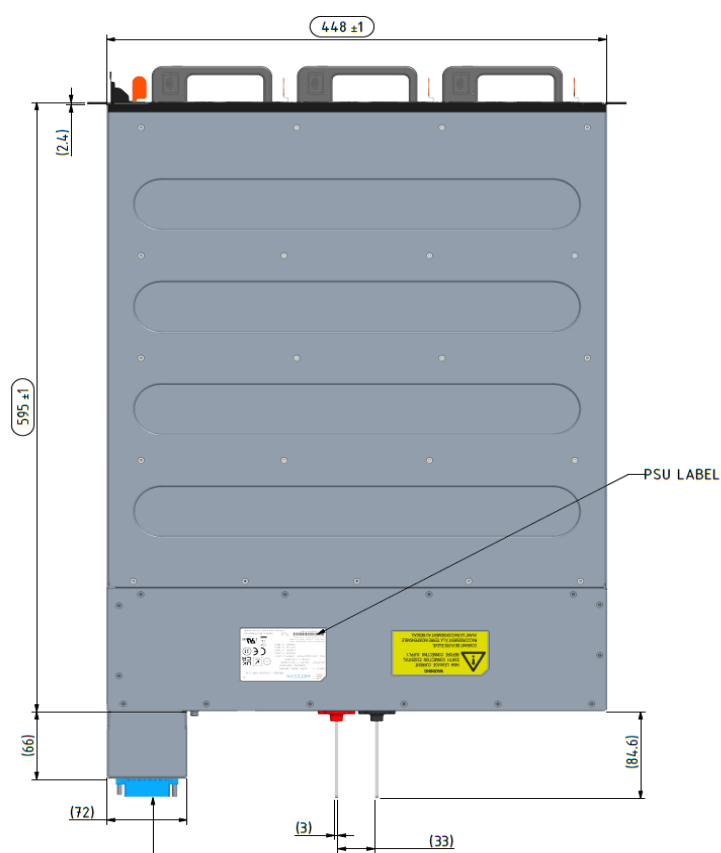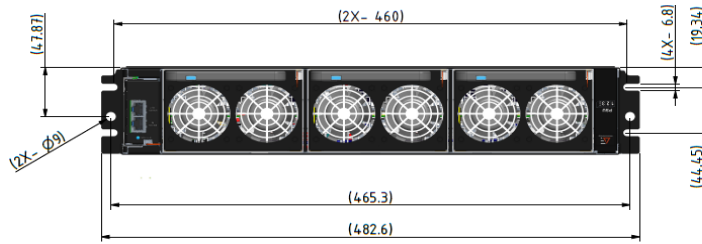

4 PIN INPUT CONNECTOR
POSITRONICS
SP6RRS1M0T01/AA-PA1364

GDT DISCONNECT
M4 SCREW


NON-ISOLATED SIGNALS
OUTPUT BUSBARS

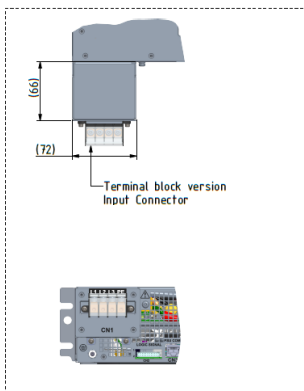

FCM30K-SHF-L-W-T


MECHANICAL DRAWINGS

DC Output Busbar

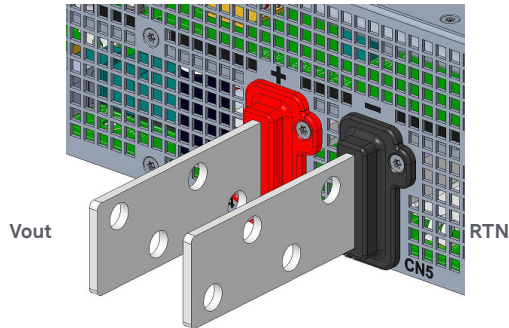


Material: 3.0 mm COPPER PLATE
Tin-Nickel Plated
Fit with Ring Terminal, M10 Stud
Vendor P/N: CT50-10 (RS)

AC Input Connectors

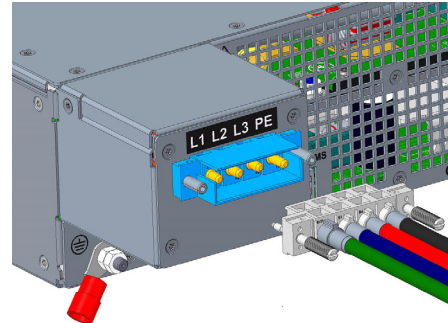


Fixed Earth Connection Pluggable version details:
Ring Terminal AWG8 MFR: Positronics MPN: SP6RRS1M0T01/AA-PA1364
Vendor P/N: 19067-0008 Scorpion Series, 4 Pins, 50Amps, w/ FMLB

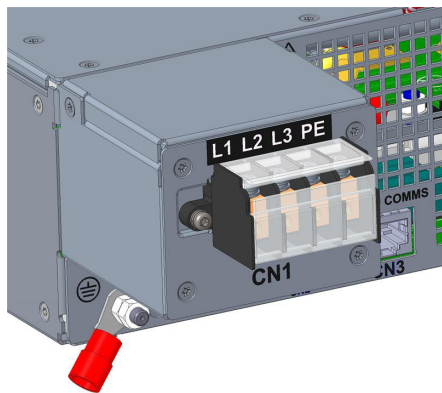


Terminal block version details: 4 Terminals, Solid busbars, 50Amps, M4x0.7 Screw
M4 terminal block screw torque requirement: 8.0Kgf-cm (min) - 10.0Kgf-cm (max)

Signal Mating Connectors

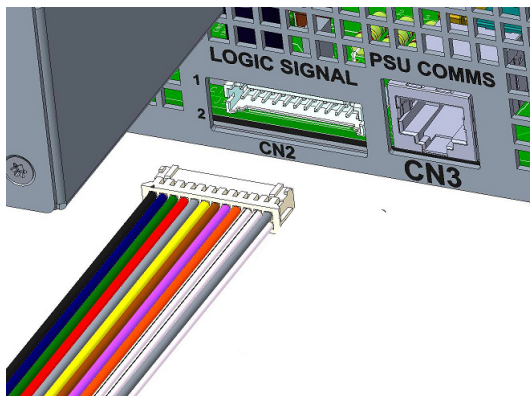

Landwin Mfg P/N: 2052P2400T-01



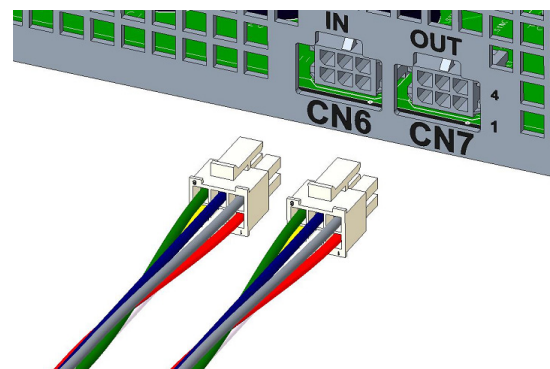


Signal Mating Connector
Molex Mfg P/N: 43025-0600


Note: PSU COMMS pin CN3 is intended only for AE internal debugging inside the shelf and for Factory use only. For Modbus communication, use the RJ45 at the front side located at the PSM (Power shelf Monitoring).

Accessories

FCM30K-SHF Pluggable Version Order Test Kit number 83-788-004P; for Terminal Block Version Order Test Kit number 83-788-004T (removes input mating connector from the kit)

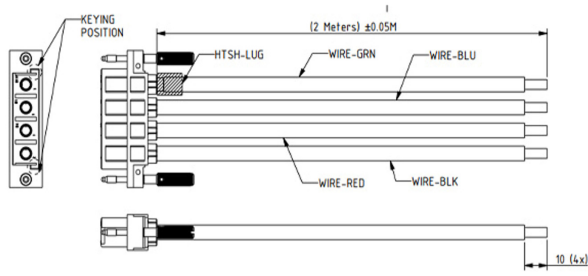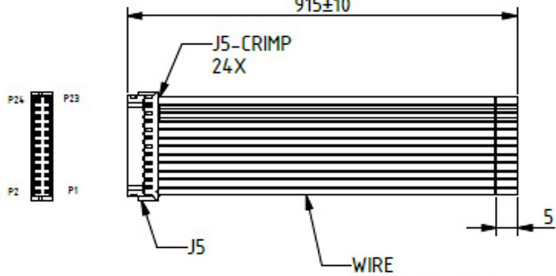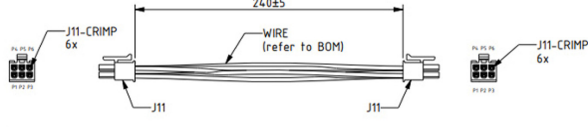Description	Diagram
<p>Input Mating Connector (Pluggable version only)</p>	 <p>Length: mm</p>
<p>Isolated Signal Mating</p>	 <p>Length: mm</p>
<p>Non-isolated Signal Mating</p>	 <p>Length: mm</p>

PIN ASSIGNMENT

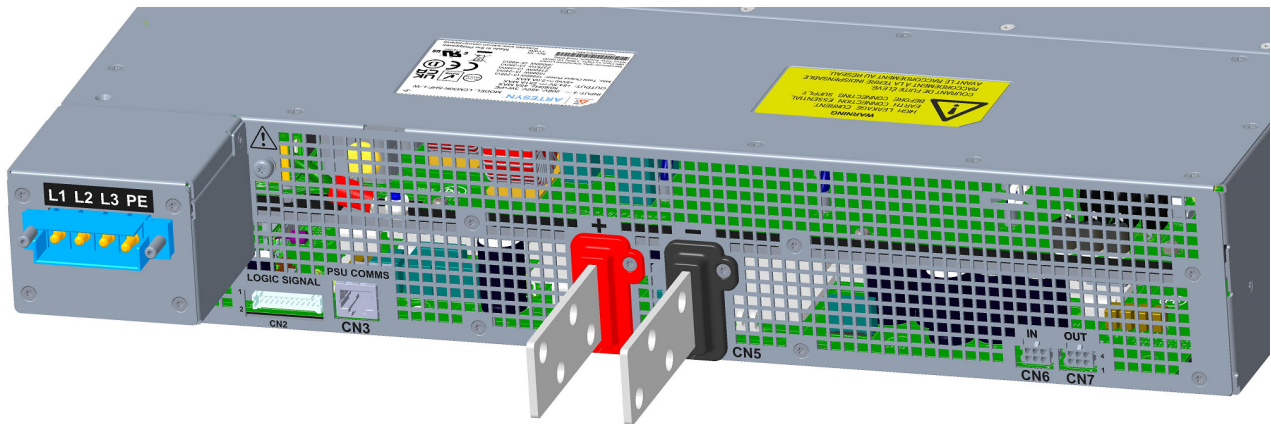


CN2			
Signal Name	Pin #		Signal Name
5VSB_GND_SHLF	2	1	5VSB
5VSB_GND_SHLF	4	3	5VSB

CN6	
Pin #	Signal Name
1	SYS_GND_SHLF
2	
3	ISHARE_SHLF_RTN
4	ISHARE_SHLF_IO
5	
6	PSU_SYNC_IO

CN7	
Pin #	Signal Name
1	SHLF_DET
2	
3	ISHARE_SHLF_RTN
4	ISHARE_SHLF_IO
5	
6	PSU_SYNC_IO


PIN ASSIGNMENT

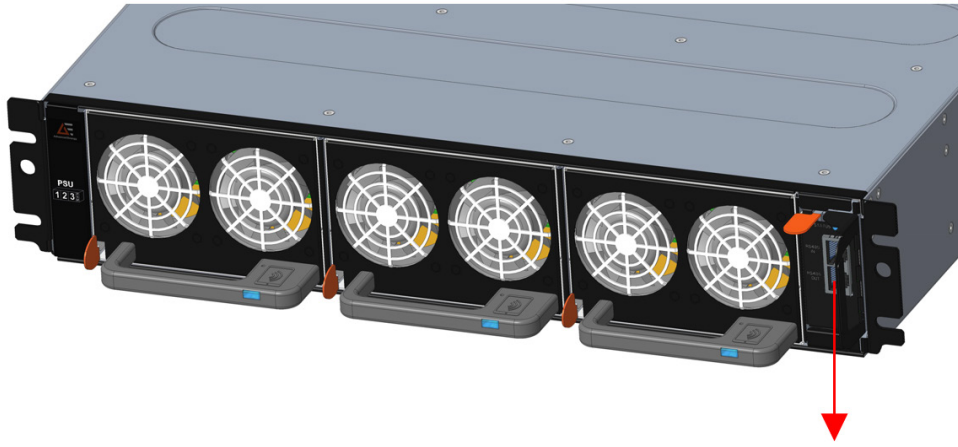

RJ45 Communication Signals

RJ45 (RS485 IN)	
Supports AE power Pro Modbus-RTU to CANOpen/Modbus TCP	
Pin#	Signal Name
1	RS485_A_SHLF
2	RS485_B_SHLF
3	N/A
4	N/A
5	N/A
6	N/A
7	5VSB
8	5VSB_GND


RJ45 (RS485 OUT)	
Supports only Modbus/RS485	
Pin#	Signal Name
1	RS485_A_SHLF
2	RS485_B_SHLF
3	N/A
4	N/A
5	N/A
6	N/A
7	N/A
8	N/A

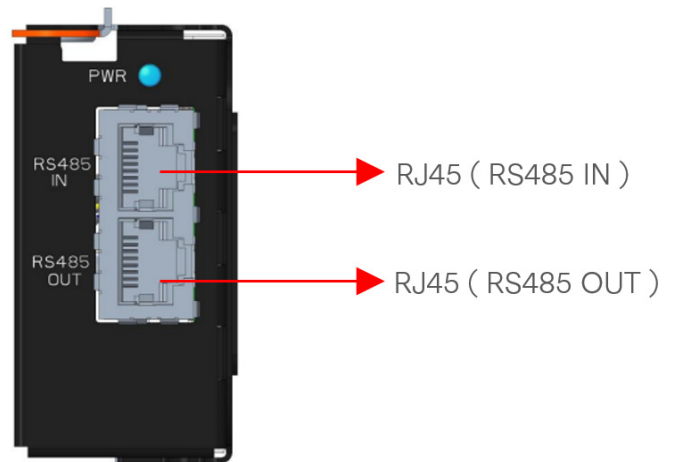

LED Indicator



Condition	LED Status
Normal operation (AC present, standby output ON, main output ON)	Solid blue
Standby mode (main output OFF)	Blinking blue (1 s ON; 1 s OFF)
Fault	Solid amber
Wrong AC input connection sequence (L1 L2 L3)	Blinking amber (1 s ON; 1 s OFF)
AC input under voltage/over voltage	Blinking amber (3 s ON; 3 s OFF)
Module firmware update in progress	Fast blinking blue (0.5 s ON; 0.5 s OFF)

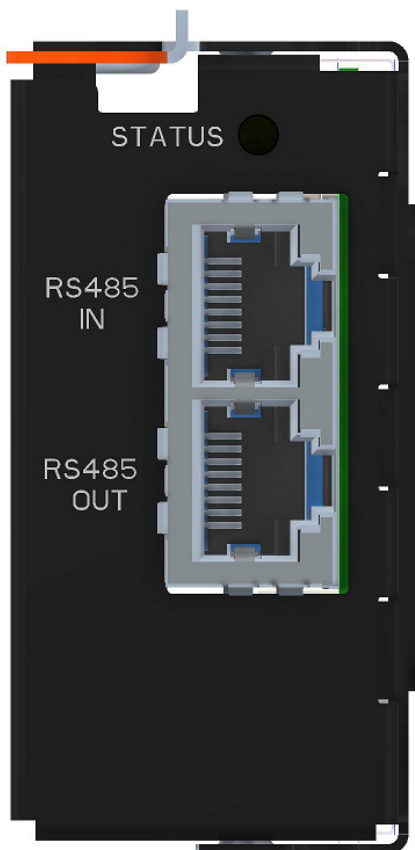


Condition	LED Status
Normal operation (INT_SUPPLY state is ON 3V3_INT_SUPPLY is ON)	Solid blue
Module firmware update in progress	Blinking blue (500 ms ON, 500 ms OFF)
Module config error*	Solid amber
Shelf internal comm error	Fast amber (200 ms ON, 200 ms OFF)
Shelf temp OTW	Slow amber (500 ms ON, 500 ms OFF)
No AC input power	OFF

*Default Config is 3 PSU present.

PSM FEATURES

Power System Manager (PSM)

Power System Manager (PSM) is a pluggable type AEI's PMC-Lite assembly that controls and oversees the PMI and Modules operations. FCM30K shelf and any modules inserted within the shelf will go into standby mode after removing the PSM.

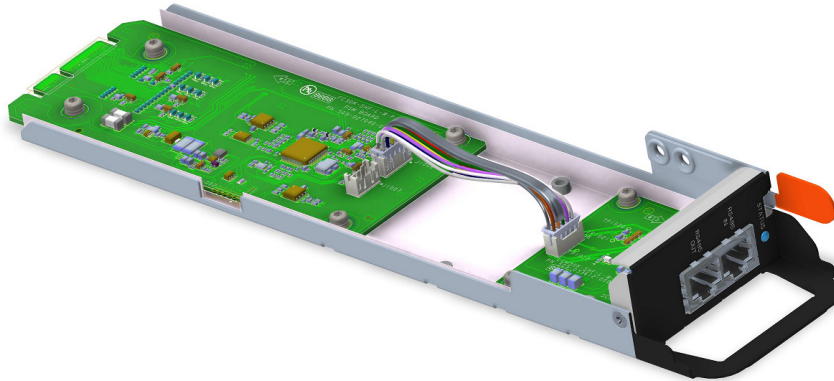

Power Metering (Optional)

The power-metering interface is able to report via UART communication through PSM the following electrical input information:

Parameter	Load	Accuracy
AC input voltage	0 - 100%	±1%
AC input current	<15%	±0.5 A
	15% - 30%	±2%
	>30% - 100%	±1%
AC input active power	15% - 20%	±5%
	>20% - 100%	±3%
Power factor (error difference not in %)	<10%	±0.1
	10% - 30%	±0.05
	>30% - 100%	±0.01

Note: For applications beyond 50°C ambient, use the shelf variants without PMI .
For the variant without PMI. Follow the stated accuracy below:

Parameter	Load	Accuracy
AC input voltage	0 - 100%	±1%
AC input current	<20%	Fixed ±7% of rated max input current
	20% - 30%	±15%
	>30% - 100%	±10%
AC input active power	<20%	Fixed ±7% of rated max input power
	20% - 30%	±15%
	>30% - 100%	±10%
Power factor		

Variant	Operating Temperature
FCM30K-SHF-L-W-P	-40°C to 50°C
FCM30K-SHF-L-W-T	-40°C to 50°C
FCM30K-SHF-L-W-P-R	-40°C to 70°C. Above 50°C to 70°C, power is derated.
FCM30K-SHF-L-W-T-R	-40°C to 70°C. Above 50°C to 70°C, power is derated.

MECHANICAL SPECIFICATION

Parameter	Detail
Shelf metal finish	Chromate-free hot dip galvanized steel (GI steel) conforming to JIS G3302 SGCC, Z08
Shelf net weight	FCM10K module 5.3kg FCM30K shelf 9.7kg FCM30K shelf with three modules 25.6 kg
Shelf mechanical dimensions	595 mm (D) x 448 mm (W) x 86.4 mm (H)

MISCELLANEOUS SPECIFICATIONS

BURN-IN

Refer to module for burn-in condition.

MTBF

The power supply module has a minimum MTBF of 200,000 hours using the Telcordia 2 Method, with specifications at 25°C, ambient, at full load. With the power supply installed in a system in a 35°C ambient environment and operating at full load, capacitor life shall be five (5) years, minimum for ALL electrolytic capacitors contained within this power supply. The power supply shall demonstrate an MTBF level of > 500,000 hours based on actual field population operational hours.

QUALITY ASSURANCE

Full QAV testing shall be conducted in accordance with Advanced Energy standards.

WARRANTY

Advanced Energy shall warrant the power supply to be free of defects in materials and workmanship for a minimum period of five (5) years from the date of shipment, when operated within specifications. The warranty shall be fully transferable to the end owner of the equipment powered by the supply.



For international contact information,
visit advancedenergy.com.

powersales@aei.com (Sales Support)
productsupport.ep@aei.com (Technical Support)
+1 888 412 7832

ABOUT ADVANCED ENERGY

Advanced Energy (AE) has devoted more than three decades to perfecting power for its global customers. AE designs and manufactures highly engineered, precision power conversion, measurement and control solutions for mission-critical applications and processes.

Our products enable customer innovation in complex applications for a wide range of industries including semiconductor equipment, industrial, manufacturing, telecommunications, data center computing, and medical. With deep applications know-how and responsive service and support across the globe, we build collaborative partnerships to meet rapid technological developments, propel growth for our customers, and innovate the future of power.

PRECISION | POWER | PERFORMANCE | TRUST

Specifications are subject to change without notice. Not responsible for errors or omissions. ©2025 Advanced Energy Industries, Inc. All rights reserved. Advanced Energy®, AE®, Evergreen™, and Vento™ are U.S. trademarks of Advanced Energy Industries, Inc.