


ARTESYN NDQ1300 SERIES

1300 W Quarter-Brick DC-DC Converter

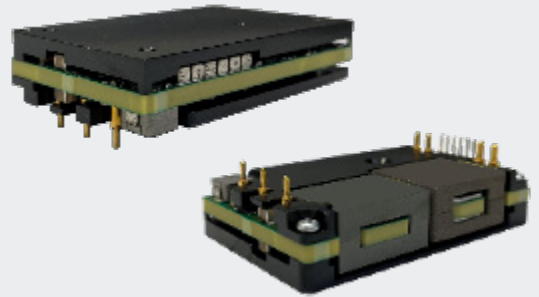

Advanced Energy's Artesyn NDQ1300 series quarter-brick non-isolated DC-DC converter provides a single regulated low noise output and function for a digital-controlled PMBus interface module. It delivers up to 1300 W with 12 VDC output voltage. The Ultra-high 97.7% peak efficiency and excellent thermal management, and operational ambient temperature range of -40 to +85 DegC makes it an ideal choice for use in datacom and telecommunication applications that can employ a Non-isolated power conversion function 40 to 60 VDC input to 12.15 V output.

SPECIAL FEATURES

- 1300 W continuous power
- Ultra high efficiency: 97.7% peak
- 40 to 60 VDC telecomm input range
- Base-plate for contact cooling or heatsink mounting
- Fixed switching frequency
- Pre-bias start-up capability
- Parallel operation, droop current sharing/active current sharing option
- PMBus™ function
- Remote control function (negative logic)
- Excellent thermal performance
- High reliability
- RoHS 3.0

- Input under voltage protection
- Input over voltage protection
- Output over voltage protection
- Output over current protection
- Over temperature protection
- PMBus Communication

SAFETY/COMPLIANCE

- Designed to meet IEC62368
- CE
- UL94 V-0 materials

AT A GLANCE

Total Power

1300 W

Input Voltage

40 to 60 VDC

Single Output

Single




ELECTRICAL SPECIFICATIONS

| Input | |
|--------------------------------------|---|
| Input Voltage Range | 40 to 60 VDC |
| Input UVLO | Turn-on: 39 VDC max Turn-off: 37 VDC max Hysteresis: 2 VDC max |
| Over Voltage (OVP) Set Point | 65 VDC nominal (+/-5VDC) |
| Efficiency (50 Vin, 25°C ambient) | 97.0% at 100% load 97.7% at 50% power |
| Isolation | Efficiency |
| Output | |
| Output Voltage Set Point | 12.45 VDC nominal |
| Output Current Maximum | 107 A continuous |
| Output Power | 1300 W continuous |
| Output Voltage Adjustment Range | 9.6 to 13.2 V |
| Output Regulation | Load regulation +/-300 mV maximum Line regulation +/-30 mV maximum |
| Output Noise & Ripple | 150 mV pk-pk |
| Short Circuit Protection | Protected, no damage to occur, Hiccup mode |
| Over Current Point | 130 A typical, hiccup mode |
| Over Temperature (OTP) protection | 115 deg C Baseplate temperature. 5 degC hysteresis |
| Control | |
| Enable | TTL compatible (negative logic), default is negative polarity enable. |
| PMBus | Digital control functions provided |

ENVIRONMENTAL SPECIFICATIONS

| | |
|-----------------------|--------------------------------|
| Operating temperature | -40°C to +85°C |
| Storage temperature | -55°C to +125°C |
| Humidity | 95% non-condensing. Operating. |

MECHANICAL DRAWING

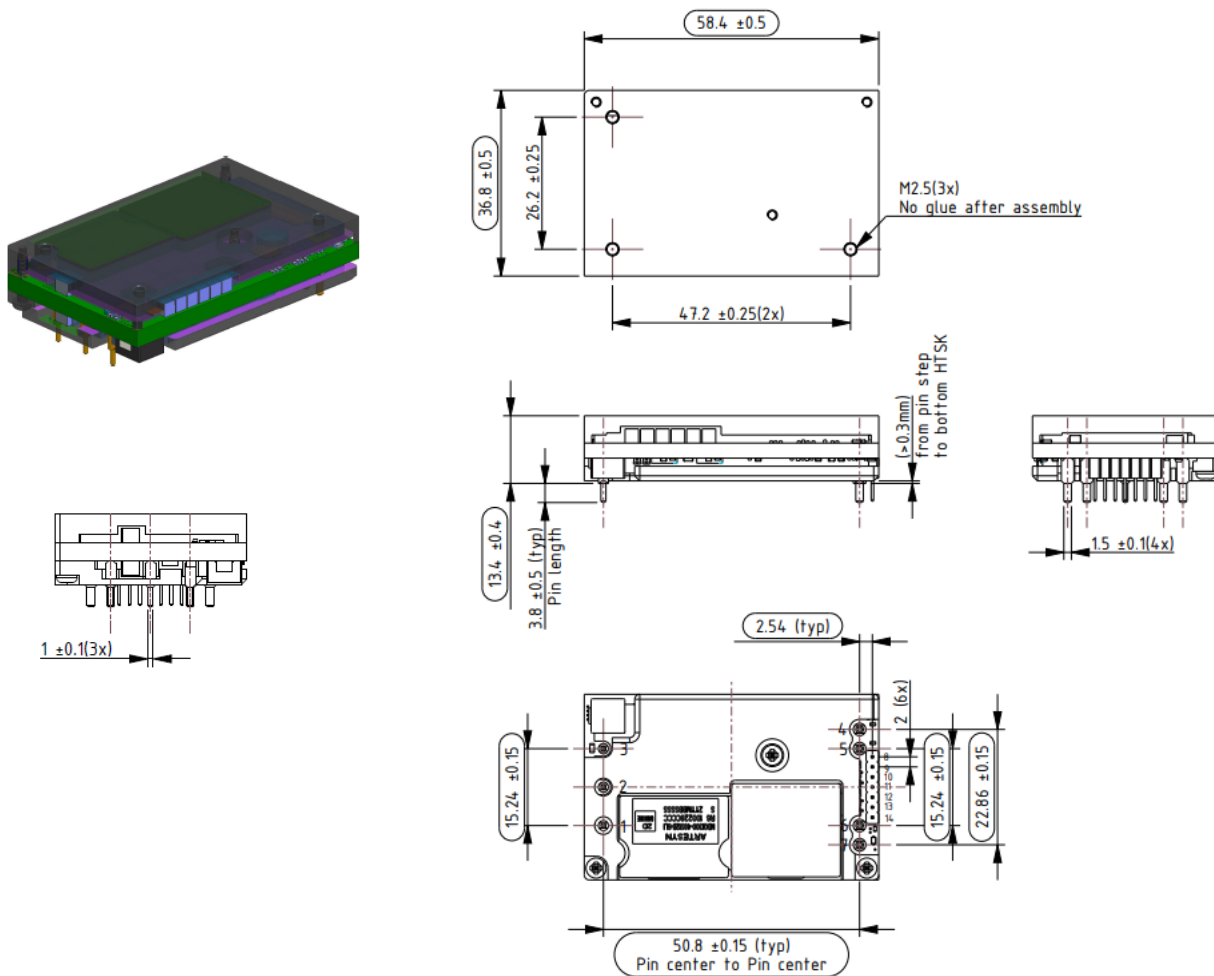

Unit: mm(inch)

TOLERANCE: X.X mm ± 0.5 mm [X.XX in. ± 0.02 in.]X.XX mm ± 0.25 mm [X.XXX in. ± 0.01 in.]

PIN DESIGNATIONS

| Pin# | Pin Name | Function |
|------|--|-------------------------------------|
| 1 | Vin+ | Positive input voltage |
| 2 | CNT | Remote ON/OFF control |
| 3 | GND | Negative input voltage |
| 4 | GND | Negative output voltage |
| 5 | GND | Negative output voltage |
| 6 | Vo+ | Positive output voltage |
| 7 | Vo+ | Positive output voltage |
| 8 | PG | Power Good |
| 9 | -Remote Sense/Sig-ground ¹ | Negative remote sense/signal ground |
| 10 | DATA | PMBus data signal |
| 11 | SMBAAlert | PMBus interface |
| 12 | CLK | PMBus clock signal |
| 13 | Addr | PMBus address |
| 14 | +Remote Sense/Current Share ¹ | Positive remote sense/current share |

Note 1 - Pin 9, 14 of NDQ1300-48S12BP-6I should be +/-Remote Sense.

Pin 9, 14 of NDQ1300-48S12BP-6IA should be Sig-ground, Current Share.

PIN LENGTH OPTIONS

| Device Code Suffix | Pin Length |
|--------------------|------------------|
| -4 | 4.8 mm ± 0.25 mm |
| -6 | 3.8 mm ± 0.25 mm |
| -8 | 2.8 mm ± 0.25 mm |
| None | 5.8 mm ± 0.25 mm |

ORDERING INFORMATION

| Model Number | Output Voltage Set Point | Output Current | RoHS Status | PMBus™ | Active Current Sharing / Remote Sense |
|--|--------------------------|----------------|-------------|--------|---------------------------------------|
| NDQ1300-48S12B ¹ P ² -6 ³ L ⁶ ⁴ | 12.15 VDC | 107 A | RoHS 3.0 | Yes | Remote Sense |
| NDQ1300-48S12B ¹ P ² -6 ³ I ⁴ A ⁵ | 12.15 VDC | 107 A | RoHS 3.0 | Yes | Active Current Sharing |


Note:

1. B = Baseplate
2. P = Positive enable. Negative enable is no 'character'
3. 6 = 3.8 mm pin length
4. I = PMBus interface
5. A = Active current sharing/Remote sense with droop current sharing is no 'character'
6. L = RoHS 3.0

THERMAL CONSIDERATION

1300 W The unit is of single-PCB construction with baseplate component added to the top side of the modules assembly

EFFICIENCY CURVE

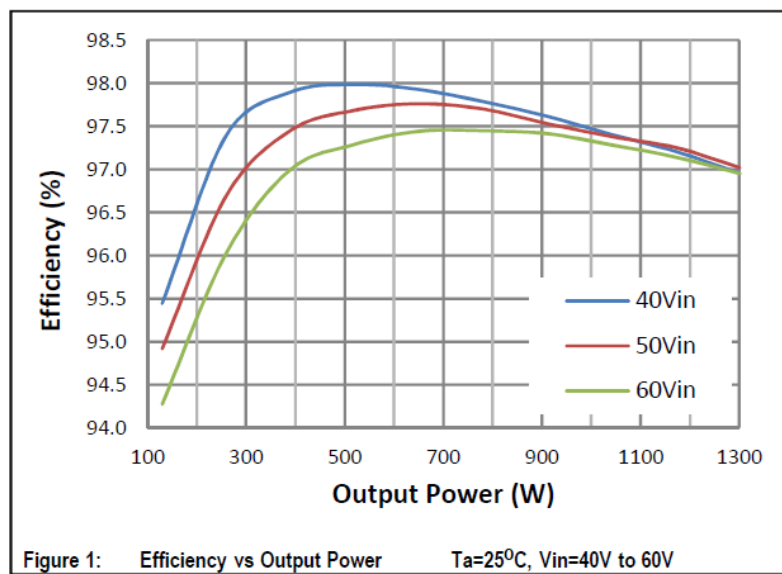



For international contact information,
visit advancedenergy.com.

powersales@aei.com (Sales Support)
productsupport.ep@aei.com (Technical Support)
+1 888 412 7832

ABOUT ADVANCED ENERGY

Advanced Energy (AE) has devoted more than three decades to perfecting power for its global customers. AE designs and manufactures highly engineered, precision power conversion, measurement and control solutions for mission-critical applications and processes.

Our products enable customer innovation in complex applications for a wide range of industries including semiconductor equipment, industrial, manufacturing, telecommunications, data center computing, and medical. With deep applications know-how and responsive service and support across the globe, we build collaborative partnerships to meet rapid technological developments, propel growth for our customers, and innovate the future of power.

PRECISION | POWER | PERFORMANCE | TRUST

Specifications are subject to change without notice. Not responsible for errors or omissions. ©2025 Advanced Energy Industries, Inc. All rights reserved. Advanced Energy®, AE® and Artesyn™ are U.S. trademarks of Advanced Energy Industries, Inc.