

# EMBEDDED POWER

AC-DC AND DC-DC POWER CONVERSION SOLUTIONS



# Table of Contents

## AC-DC Power Supplies

### Low Power Up to 1200 W

- 10 Open frame/enclosed 1 to 4 outputs
- 30 External power adapters

### Fanless/Conduction Cooled Up to 1200 W

- 18 LCC250 Series
- 20 LCC600 Series
- 22 LCC1200 Series
- 24 CoolX®600 Series
- 26 CoolX®1000 Series
- 28 CS1000 Series

### Healthcare Power Up to 30 kW

- 37 1 to 24 outputs

### Modular Up to 30 kW

- 46 UltiMod Series
- 48 Intelligent Medium Power (iMP)
- 52 Micro Medium Power ( $\mu$ MP)
- 54 CoolX®1800
- 56 CoolX®3000
- 58 FlexiCharge (FC1500/2500/4000)
- 60 Next Generation NeoPower (NP)
- 64 Intelligent Medium-High Power (iVS)
- 68 Precision High Power System (iHP)
- 72 Intelligent Transfer Switch (iTS)

### Bulk Power Up to 144 kW

- 74 LCM Series
- 84 TF Series
- 88 FCM10K/30K
- 90 FCM33K
- 92 LumaDrive
- 94 Xsolo Series
- 96 Distributed power bulk front end

### Bench Programmable

- 98 iLS600 Series
- 100 iLS1500 Series

### Distributed and M-CRPS/CRPS Power

- 102 DS Series
- 107 M-CRPS/CRPS Series

## Racks

- 110 50 V, 18 kW, 1OU Open Rack Power Shelf
- 111 50 V, 3 kW, Open Rack Rectifier
- 112 50 V, 33 kW, 1OU Open Rack HPR Power Shelf
- 113 50 V, 5.5 kW, Open Rack HPR Rectifier
- 114 48 V, 30 kW, 2U EIA Power Shelf
- 115 48 V, 3 kW, EIA Rectifier with ATS

## DIN Rail (ADN) Up to 960 W

- 116 Single & 3-phase

## DC-DC Converters

### Industry Standard Isolated

- 120 Quarter-Brick
- 121 Eighth-Brick
- 123 Sixteenth-Brick
- 125 Radio Frequency Power Modules
- 126 Wide Input Voltage
- 126 Direct Conversion – PSA Series

### Industry Standard Non-isolated

- 127 C-Class
- 128 LGA Series
- 130 Digital DC-DC Converters

### High Power 300 V Input

- 131 On-board AC-DC Distributed Architecture
- 132 Power Factor Correction (PFC)
- 133 Full Brick AC-DC Converter

### Low Power Isolated

- 134 Low Power Isolated DC-DC
- 141 DC-DC Converter for Railway Application
- 143 DC-DC Converter for Medical Application

### High Voltage DC-DC Modules

- 145 Mission-Critical High Voltage Solutions

## Advanced Energy shapes and transforms how power is used, delivered, and managed.

Advanced Energy has devoted more than four decades to perfecting power for its global customers. We design and manufacture highly engineered, precision power conversion, measurement, and control solutions for mission-critical applications and processes.

Advanced Energy offers a broad portfolio of AC-DC and DC-DC power supplies from its Artesyn, Excelsys, SL Power, and UltraVolt product lines which enables customer innovation in complex applications for a wide range of industries including semiconductor equipment, industrial, manufacturing, telecommunications, data center computing, and medical. With deep application know-how and responsive service and support across the globe, we build collaborative partnerships to meet rapid technological developments, propel growth for our customers, and innovate the future of power.

### Local Support

Our regional sales offices are ready to provide expert local applications and sales support. In addition, an extensive network of manufacturers' representatives and distributors bring our products to you. Please call for sales office locations near you or visit our website at [advancedenergy.com](http://advancedenergy.com).

### Contact Us

Americas (USA)  
Telephone: +1 888 412 7832

Europe (UK)  
Telephone: +44 (0) 1384 842 211

Asia (HK)  
Telephone: +852 2176 3333

### Technical Support

Americas (USA)  
+1 888 412 7832 (North America)

Europe, Middle East & Africa (EMEA)  
0 800 0321546 (UK)  
+44 800 0321546 (outside UK)

Asia  
+400 88 99 130 (China)  
+86 29 8874 1895 (outside China)

# Embedded Power Selector Guide

AC-DC

## MODULAR

**UltiMod**  
Up to 1200 W  
1 to 12 Outputs



**iMP Series, iVS Series**  
Up to 4920 W  
1 to 24 Outputs



**uMP Series**  
Up to 1800 W  
Up to 12 Outputs



**CoolX1800, CoolX3000**  
Up to 3000 W  
Up to 12 Outputs



**NeoPower Series**  
Up to 4000 W  
Up to 16 Outputs



**iHP Series, iTS Series**  
Up to 30000 W  
Up to 8 Outputs



## BULK/DISTRIBUTED/ENCLOSED

**LCM Series**  
300, 600, 1000, 1500,  
3000, 4000 W  
85 to 528 VAC  
12 to 300 VDC



**FCM10K/30K**  
10 kW Module  
30 kW Shelf  
187 to 528 VAC  
54.5 VDC



**FCM33K**  
5.5 kW Module  
33 kW Shelf  
208 to 230 VAC 3P4W  
49 VDC



**Xsolo/Xsolo BF Series**  
500, 1000 W  
85 to 264 VAC  
120 to 380 VDC



**M-CRPS/CRPS Series**  
550 to 3600 W  
90 to 264 VAC  
12, 54 VDC



**LumaDrive™ System**  
Up to 144 kW  
Same as LCM12K  
Input/Output Voltage



**DS Series**  
450 to 3000 W  
90 to 264 VAC  
12, 24, 48 VDC



**TF Series**  
800 to 3000 W  
90 to 264 VAC  
12 to 400 VDC



**HPS Series**  
1 to 3000 W  
90 to 264 VAC  
48 VDC



## RACKS

**Open Rack Power Shelf and Rectifier**  
1U,  
18 kW



**Open Rack HPR Power Shelf and Rectifier**  
1U, 33 kW



**Power Shelf and Rectifier with ATS**  
2U  
36 kW



**HPR1**  
1U, 12 kW  
Accepts 4 HPS3000



**UFR**  
1U, 6 kW  
Accepts 3 UFE units



## OPEN FRAME

**GB10/20/30/40**  
10 to 60 W  
**NPS20/40/60-M**  
25 to 60 W  
**NPT40-M**  
45 to 55 W  
**MB60/65/120**  
60 to 120 W  
**SLB65/125/300/350/1000**  
65 to 1000 W  
**LPS100-M**  
100 to 150 W  
**CINT1150/1200/1275**  
100 to 275 W



**MINT1065/1110/1150/1180/1275**  
100 to 275 W  
**CINT/MINT3110**  
100 to 150 W  
**LPT100-M**  
130 W  
**LPP200**  
100 to 200 W  
**LB130S/240S**  
150 to 250 W  
**CPS250-M**  
150 to 250 W  
**LPS200/360-M**  
100 to 250 W



**TLP150**  
100 to 150 W  
**GB130Q**  
100 to 130 W  
**LPQ200-M**  
200 W  
**LPS360-M**  
240 to 360 W  
**CNS650-MU**  
400 to 650 W  
**NGB150/250/425/660/800/1200**  
150 to 1200 W  
**NCF150/250/425/660**  
150 to 660 W



## BENCH

**iLS Series**  
600 W,  
1500 W



## FANLESS/ CONDUCTION COOLED

### LCC250/600/1200

250/600/1200 W



### CoolX600/1000

600/1000 W



### CS1000

1000 W



## ADAPTERS

### AD, DA, DP, SLE, ME, TE Series

5 to 240 W



## SPECIAL

### ADN-C Series

120 to 960 W

Single & 3-phase

Approved for UL508 & Hazardous Locations



## DC-DC

## LOW VOLTAGE

### PFC

Full Brick; AIF  
3/4 Brick; AIT  
1/4 Brick; AIQ



### High Power

Full Brick; AIF  
3/4 Brick; AIT  
1/2 Brick; AIH  
1/4 Brick; BDQ/BCQ



### Telecom DC-DC

1/16th brick 35 to 120 W; ALD/AVD  
1/8th brick 50 to 300 W; AVO/ADO  
1/4 brick 50 to 800 W; AVQ/ADQ  
1/2 brick 300 to 700 W; AVE/ADH  
Full brick 500 to 800 W; AGF



### Industrial DC-DC

0.5 by 0.5 DIP 3 W; AYA  
0.9 by 0.5 DIP 3 W; ATA  
1.2 by 0.8 DIP 24.6 W, 10 W; ASA  
1 by 1; 10 W, 20 W, 25 W; AXA  
1 by 2; 15 W, 40 W, 50 W; AEE  
1.6 by 2; 25 W, 30 W; AET



### Direct Conversion -

### PSA Series

100 A; ADC



### Non-isolated DC-DC

C2 Class 3 to 60 A; LDO  
LGA package 3 to 20 A; LGA  
LGA50D, LGA80D, LGA110D 25 to  
110 A; LGA50D, LGA80D, LGA110D



### Medical DC-DC

0.8 by 1.2;  
Medical 6 W; ASA  
1 by 2;  
Medical 10 W, 15 W,  
20 W; AEE

### Railway DC-DC

1 by 2; Railway  
10 W, 20 W; ERM  
1/4 brick Railway  
50 W, 75 W, 100 W,  
150 W; ERM



## HIGH VOLTAGE

### High Power C

Output voltage  
125 V to 60 kV  
Output power  
60, 125, or 250 W



### A

Output voltage  
62 V to 20 kV  
Output power  
4, 15, 20, and 30 W



### LE

Output voltage  
1 to 30 kV  
Output power  
4, 20, and 30 W



### AA

Output voltage  
62 V to 6 kV  
Output power  
4, 20, and 30 W



### HVA

Output voltage  
1 to 20 kV  
Max output power  
2 W



### US

Output voltage  
200 to 500 V  
Max output power  
0.1 W



## A History of Innovation

At Advanced Energy, our engineers have been designing and developing power supply products for more than 40 years. Our products have helped pave the way for advancements in numerous applications in the communications, industrial, computing, data storage, and healthcare markets.

When developing products, time is money. Every step in the process that you can eliminate, speed up, or make more effective accelerates your time-to-market and lowers your R&D costs.

Major advantages of partnering with us include:

- Broad portfolio of power supplies
- Highly versatile power supplies
- Modified standards and value-add services
- Low energy consumption
- Energy-efficient products
- Space-efficient power
- Reliability and quality
- Worldwide distributor network
- Vast knowledge, experience, and expertise



**Accelerate, Improve, and Enhance the Capabilities of  
Your Next System Design.**

Advanced Energy utilizes the following design methodologies and techniques to ensure that our power supplies meet the rigorous quality and reliability requirements of the communications, industrial, computing, data storage, and healthcare markets.

---

## Power for the Next Generation

Many of our products incorporate powerful programming, monitoring, and self-testing software providing system engineers with critical data to manage power consumption. High efficiency, green design and manufacturing technologies, and innovative supply and demand systems collectively deliver key business efficiencies and new design capabilities.

Advanced Energy can help take your new product design or redevelopment efforts to the next level with a shorter time-to-market, higher reliability, and greater scalability.

■ **Shorter Time-to-Market** – our latest programmable power solutions and our modular, medium/high power  $\mu$ MP and iMP series provide you with shorter time-to-market and offer faster test and qualification than traditional analog power solutions. Our modified standards and value-add services also provide turn-key solutions for the best application match to help accelerate time-to-market without compromising quality.

■ **Higher Reliability** – moving from inflexible fixed-output analog power supplies to programmable power solutions enables our engineers to more extensively test and document our products to ensure they meet or exceed your reliability requirements. We also provide a wide range of environmental, EMC compliance, and safety certifications to help speed your product design process.

■ **Greater Scalability** – many of our latest power solutions are scalable, programmable, and plug-compatible with our earlier-generation products, enabling you to quickly address changes or enhancements to your systems. You can now satisfy most changes in power requirements by reprogramming the power supply and, if you need change radically, you can easily swap to a more capable solution. This inherent scalability eliminates redesign costs, reduces testing time, and provides you with greater design flexibility.

# Power Supply Design Controls

## Reliability Models and Predictions

- A prediction of design reliability in terms of Mean Time Between Failures (MTBF) using Telecordia, Bellcore, or MIL-HDBK-217F
- Not intended as a measure of expected field performance, but for design trade-off analysis and review of part stress derating performance

## Failure Modes and Effect Analysis

- An analytical technique to identify and review failure modes, their causes, mechanisms, and effects
- Provides a formal risk assessment to reduce field failures at the customer site

## Component Selection

- Database warehouse of all component information
- Design engineers can only select components rigorously approved from suppliers that have undergone strict qualification and auditing process

## Derating Analysis

- Intended to reduce the failure rate of components

## Design for Manufacturability

- Design rules regarding manufacturability


## Simulation Analysis – Computer-aided Engineering Tools

### Engineering Tools


- Thermal Simulation
- Circuit Simulation
- EMI Field Simulation
- Detailed Mechanical Design
- PCB Layout and Tracking
- Structural Simulation

For additional information, visit [advancedenergy.com](http://advancedenergy.com)


## Advanced Energy Computer-aided Engineering Tools



Thermal Simulation




Circuit Simulation




EMI Field Simulation



Detailed Mechanical Design



PCB Layout and Tracking



Structural Simulation



# AC-DC Power Supplies

As an industry leader in distributed power supplies, Advanced Energy provides an exceptionally wide range of AC-DC power conversion solutions

## LOW POWER

# Low Power

### Open Frame 1 to 4 Outputs

10 to 1200 W

### SPECIAL FEATURES

#### All models feature

- Industry standard footprints
- Wide-range AC input
- Full power to 50°C
- High demonstrated MTBF
- Over-voltage protection
- Over-load protection
- Built-in EMI filtering
- Extensive safety approvals
- Derated operation to 70°C

#### Many models feature

- EN61000-3-2 compliance
- Supervisory outputs (5 V/12 V)
- Wide-adjust floating 4<sup>th</sup> output
- Single wire current share
- Medical approvals
- Remote sense
- Adjustable outputs
- Power fail
- Wide-adjust on single output models
- Derated operation to 80°C

Low Power						
Output Power [Forced Air] Free Air	Output				Size W x L x H (mm)	Model
	V1	V2	V3	V4		
12 W	GB10 Series <sup>1</sup>					
	5 V @ 2 A				1.6 x 3.4 x 0.98 in (41 x 86 x 25)	GB10S05K01
	7.5 V @ 1.3 A					GB10S07K01
	9 V @ 1 A					GB10S09K01
	12 V @ 1 A					GB10S12K01
	15 V @ 0.8 A					GB10S15K01
	24 V @ 0.5 A					GB10S24K01
20 W	GB20 Series					
	5 V @ 3 A <sup>2</sup>				1.6 x 3.4 x 0.98 in (41 x 86 x 25)	GB20S05K01
	7.5 V @ 2 A <sup>2</sup>					GB20S07K01
	9 V @ 2 A <sup>2</sup>					GB20S09K01
	12 V @ 1.5 A <sup>3</sup>					GB20S12K01
	15 V @ 1.2 A <sup>3</sup>					GB20S15K01
	24 V @ 0.8 A <sup>3</sup>					GB20S24K01
	48 V @ 0.4 A <sup>3</sup>					GB20S48K01
30 W	GB30 Series					
	5 V @ 4 A <sup>2</sup>				1.9 x 4 x 0.9 in (48 x 101.6 x 22.2)	GB30S05K01
	7.5 V @ 3 A <sup>2</sup>					GB30S07K01
	9 V @ 3 A <sup>2</sup>					GB30S09K01
	12 V @ 2.5 A <sup>3</sup>					GB30S12K01
	15 V @ 2 A <sup>3</sup>					GB30S15K01
	18 V @ 1.67 A <sup>3</sup>					GB30S18K01
	24 V @ 1.33 A <sup>3</sup>					GB30S24K01
	48 V @ 0.63 A <sup>3</sup>					GB30S48K01

<sup>1</sup> "K" - class I input, change to "C" for class II input, change to "P" for class II input PCB mount pins.

<sup>2</sup> "K" - class I input, change to "C" for class II input.

<sup>3</sup> Change "K" to "P" for PCB mount pins class I input, change "K" to "V" for PCB mount pins class II input.

Low Power								
Output Power		Output				Size W x L x H (mm)	Model	
[Forced Air]	Free Air	V1	V2	V3	V4			
[40 W]	25 W	NPS20-M Series <sup>3</sup>						
		5 V @ 5 A [8 A] <sup>2</sup>				2 x 4 x 1 in (50.8 x 101.6 x 25.4)	NPS22-M	
		12 V @ 2.1 A [3.3 A] <sup>2</sup>					NPS23-M	
		15 V @ 1.7 A [2.7 A] <sup>2</sup>					NPS24-M	
		24 V @ 1 A [1.8 A] <sup>2</sup>					NPS25-M	
		48 V @ 0.5 A [0.84 A] <sup>2</sup>					NPS28-M	
40 W		GB40 Series						
		5 V @ 5 A <sup>4</sup>				2 x 4 x 0.9 in (50.8 x 101.6 x 22.3)	GB40S05K01	
		9 V @ 4 A <sup>4</sup>					GB40S09K01	
		12 V @ 3.4 A <sup>4</sup>					GB40S12K01	
		18 V @ 2.22 A <sup>5</sup>					GB40S18K01	
		24 V @ 1.7 A <sup>5</sup>					GB40S24K01	
		48 V @ 0.83 A <sup>5</sup>					GB40S48K01	
[55 W]	45 W	NPT40-M Series <sup>3</sup>						
		5 V @ 5 A [8 A]	12 V @ 2.5 A [3 A]	-12 V @ 0.5 A [ 0.7 A]		2 x 4 x 1 in (50.8 x 101.6 x 25.4)	NPT42-M	
		5 V @ 5 A [8 A]	15 V @ 2 A [2.4 A]	-15 V @ 0.5 A [ 0.7 A]			NPT43-M	
		5 V @ 5 A [8 A]	24 V @ 1 A [1.5 A]	12 V @ 0.5 A [ 0.7 A]			NPT44-M	
[60 W]	45 W	NPS40-M Series <sup>3</sup>						
		5 V @ 8 A [11 A] <sup>2</sup>				2 x 4 x 1 in (50.8 x 101.6 x 25.4)	NPS42-M	
		12 V @ 3.75 A [5 A] <sup>2</sup>					NPS43-M	
		15 V @ 3 A [4 A] <sup>2</sup>					NPS44-M	
		24 V @ 1.9 A [2.5 A] <sup>2</sup>					NPS45-M	
		48 V @ 0.94 A [1.25 A] <sup>2</sup>					NPS48-M	
60 W		MB60 Series <sup>4</sup>						
		12 V @ 4.58 A				2 x 3 x 1.06 in (50.8 x 76.2 x 27)	MB60S12K	
		15 V @ 4 A					MB60S15K	
		18 V @ 3.33 A					MB60S18K	
		24 V @ 2.5 A					MB60S24K	
		36 V @ 1.67 A					MB60S36K	
		48 V @ 1.25 A					MB60S48K	
[60 W]	60 W	NPS60-M Series <sup>3</sup>						
		5 V @ 11 A <sup>2</sup>				2 x 4 x 1 in (50.8 x 101.6 x 25.4)	NPS62-M	
		12 V @ 5 A <sup>2</sup> (Level VI Efficiency)					NPS63-M-006	
		15 V @ 4 A <sup>2</sup>					NPS64-M	
		24 V @ 2.5 A <sup>2</sup>					NPS65-M	
65 W		MB65 Series <sup>4</sup>						
		12 V @ 5.4 A				2 x 3.5 x 1.3 in (50.8 x 88.9 x 33.1)	MB65S12K	
		15 V @ 4.3 A					MB65S15K	
		24 V @ 2.7 A					MB65S24K	
		48 V @ 1.35 A					MB65S48K	

<sup>1</sup> Rating with 30 CFM of air<sup>2</sup> Optional cover/enclosure<sup>3</sup> Floating output<sup>4</sup> This product is a component power supply and is only for inclusion by professional installers within other equipment and must Not be operated as a standalone product. EMC compliance to appropriate standards must be verified at the system level. This product is for sale to OEMs and system integrators, including through distribution channels. It is not intended for sale to end users.<sup>4</sup> "K" - class I input, change to "C" for class II input. Variety voltages are possible, consult factory for the models availability.<sup>5</sup> Change "K" to "P" for PCB mount pins class I input, change "K" to "V" for PCB mount pins class II input.

## LOW POWER

Low Power								
Output Power		Output				Size W x L x H (mm)	Model	
[Forced Air]	Free Air	V1	V2	V3	V4			
65 W		MINT1065 Series <sup>1</sup>				2 x 4 x 1 in (50.8 x 101.6 x 26)	MINT1065X1275C01 MINT1065X1375C01 MINT1065X1575C01 MINT1065X1875C01 MINT1065X2075C01 MINT1065X2475C01 MINT1065X4875C01	
	12 V @ 5.25 A							
	13.2 V @ 4.8 A							
	15 V @ 4.33 A							
	18 V @ 3.5 A							
	20 V @ 3.25 A							
	24 V @ 2.7 A							
	48 V @ 1.35 A							
65 W		SLB65 Series <sup>2</sup>				2 x 3 x 1.08 in (50.8 x 76.2 x 27.55)	SLB65S05x SLB65S12x SLB65S15x SLB65S18x SLB65S24x SLB65S48x	
	5 V @ 8 A							
	12 V @ 5 A							
	15 V @ 4 A							
	18 V @ 3.3 A							
	24 V @ 2.71 A							
	48 V @ 1.35 A							
[110 W] 80 W		CINT3110 Series <sup>3</sup>				2 x 4 x 1.3 in (50.8 x 101.6 x 33)	CINT3110A0508K01 CINT3110A1708K01 CINT3110A1908K01	
	5 V @ 10 A [14 A]	12 V @ 4.5 A [6 A]	-12 V @ 1 A [1 A]					
	5 V @ 10 A [14 A]	15 V @ 3.5 A [4.5 A]	-15 V @ 1 A [1 A]					
	5 V @ 8 A [12 A]	24 V @ 3 A [4 A]	-24 V @ 1 A [1 A]					
[110 W] 80 W		MINT3110 Series <sup>4</sup>				2 x 4 x 1.3 in (50.8 x 101.6 x 33)	MINT3110A0508K01 MINT3110A1708K01 MINT3110A1908K01	
	5 V @ 10 A [14 A]	12 V @ 4.5 A [6 A]	-12 V @ 1 A [1 A]					
	5 V @ 10 A [14 A]	15 V @ 3.5 A [4.5 A]	-15 V @ 1 A [1 A]					
	5 V @ 8 A [12 A]	24 V @ 3 A [4 A]	-24 V @ 1 A [1 A]					
110 W		MINT1110 Series <sup>5</sup>				3 x 5 x 1.27 in (76.2 x 127 x 32.3)	MINT1110A1208K01 MINT1110A1508K01 MINT1110A1808K01 MINT1110A2408K01	
	12 V @ 7.5 A							
	15 V @ 6.5 A							
	18 V @ 5.8 A							
	24 V @ 4.6 A							
[115 W] 75 W		LB115S Series <sup>6</sup>				2 x 4 x 1.26 in (50.8 x 101.6 x 32.1)	LB115S12K LB115S24K LB115S48K LB115S56K	
	12 V @ 6.25 A [9 A]							
	24 V @ 4.85 A [3.13 A]							
	48 V @ 1.56 A [2.4 A]							
	56 V @ 1.34 A [2.05 A]							
[120 W] 100 W		MB120 Series <sup>7</sup>				2 x 4 x 1.25 in (50.8 x 101.6 x 32)	MB120S12K01 MB120S15K01 MB120S18K01 MB120S24K01	
	12 V @ 8.3 A [10 A]							
	15 V @ 6.6 A [8 A]							
	18 V @ 5.5 A [6.6 A]							
	24 V @ 4.1 A [5 A]							

<sup>1</sup> Rating with 200 LFM of air.

<sup>2</sup> Replace the "x" at the middle of the model number with "A" for class I (grounded) input or replace with "B" for class II (ungrounded) input or "C" with chassis/cover provided (class I only).

<sup>3</sup> Replace the "x" at the end of the model number with "C" for class II (ungrounded) input or replace with "K" for class I (grounded) input.

<sup>4</sup> Industrial safety certificate only.

<sup>5</sup> "01" = standard model, "02" and higher indicates a modified model.

<sup>6</sup> LED grade. Optional cover/enclosure.

<sup>7</sup> "K" - class I input, change to "C" for class II input.

Low Power										
Output Power		Output				Size W x L x H (mm)	Model			
[Forced Air]	Free Air	V1	V2	V3	V4					
[125 W]	85 W	SLB125 Series <sup>1</sup>						2 x 4 x 1.26 in (50.8 x 101.6 x 32)		
	85 W	12 V @ 7.1 A [9.8 A]						SLB125S12x		
		15 V @ 5.6 A [7.9 A]						SLB125S15x		
		18 V @ 4.7 A [6.5 A]						SLB125S18x		
		24 V @ 3.6 A [5.2 A]						SLB125S24x		
		36 V @ 2.4 A [3.5 A]						SLB125S36x		
		48 V @ 1.8 A [2.1 A]						SLB125S48x		
		56 V @ 1.5 A [2.2 A]						SLB125S56x		
[130 W]	100 W	GB130Q Series <sup>2</sup>						3 x 5 x 1.34 in (76.2 x 127 x 34.1)		
	100 W	5 V @ 12 A [16 A]	12 V @ 3 A [4 A]	-12 V @ 1 A [1.2 A]	12 V @ 1 A [1.2 A]			GB130QA		
		5 V @ 12 A [16 A]	12 V @ 3 A [4 A]	-15 V @ 1 A [1.2 A]	15 V @ 1 A [1.2 A]			GB130QC <sup>3</sup>		
		5 V @ 12 A [16 A]	24 V @ 2 A [3 A]	-12 V @ 1 A [1.2 A]	12 V @ 1 A [1.2 A]			GB130QD <sup>3</sup>		
		5 V @ 12 A [16 A]	24 V @ 2 A [3 A]	-15 V @ 1 A [1.2 A]	15 V @ 1 A [1.2 A]			GB130QE <sup>3</sup>		
		5 V @ 10 A [16 A]	24 V @ 4 A [5 A]	-12 V @ 1 A [1.2 A]	12 V @ 2 A [2 A]			GB130QP		
[130 W]	LPT100-M Series						2 x 4 x 1.28 in (50.8 x 101.6 x 32.7)	LPT101-M		
	4	3.3 V @ [18 A]	5 V @ [9 A]	12 V @ [2.3 A]				LPT102-M		
		5 V @ [18 A]	12 V @ [9 A]	-12 V @ [2 A]				LPT103-M		
		5 V @ [18 A]	15 V @ [7.2 A]	-15 V @ [1.5 A]				LPT104-M		
		5 V @ [18 A]	24 V @ [3 A]	12 V @ [2.3 A]						
130 W	LB130S Series <sup>5</sup>						3 x 5 x 1.22 in (76.2 x 127 x 31.1)	LB130S56K		
	56 V @ 2.32 A									
[150 W]	100 W	LPS100-M Series						2 x 4 x 1.29 in (50.8 x 101.6 x 33)		
	4	5 V @ 16 A [24 A]						LPS102-M		
		12 V @ 8.3 A [12.5 A]						LPS103-M		
		15 V @ 6.7 A [10 A]						LPS104-M		
		24 V @ 4.2 A [6.3 A]						LPS105-M		
		48 V @ 2.1 A [3.1 A]						LPS108-M		
		54 V @ 1.85 A [2.8 A]						LPS109-M		
[150 W]	100 W	TLP150 Series						3 x 5 x 1.25 in (76.2 x 127 x 31.75)		
	12 V @ 8.4 A [12.5 A]							TLP150R-96S12J		
		24 V @ 4.2 A [6.3 A]						TLP150R-96S24J		
		36 V @ 2.8 A [4.2 A]						TLP150R-96S36J		
		48 V @ 2.1 A [3.2 A]						TLP150R-96S48J		

<sup>1</sup> Rating with 200 LFM of air, 30 CFM of air for LPT100-M, LPS100-M and TLP150.

<sup>2</sup> Replace the "x" at the end of the model number with "C" for class II (ungrounded) input or replace with "K" for class I (grounded) input.

<sup>3</sup> Add "-C" suffix to the models with optional cover/chassis. Output power derates to 104 W with airflow, 75 W convection cooled.

<sup>4</sup> Contact factory for the availability.

<sup>5</sup> Optional cover/enclosure

<sup>5</sup> LED grade.

## LOW POWER

Low Power							
Output Power		Output				Size W x L x H (mm)	Model
[Forced Air]	Free Air	V1	V2	V3	V4		
[150 W]	100 W	CINT1150 Series <sup>1</sup>					
		12 V @ 8.33 A [12.5 A]				2 x 4 x 1.3 in (50.8 x 101.6 x 33)	CINT1150A1206K01
		24 V @ 4.17 A [6.25 A]					CINT1150A2406K01
		48 V @ 2.08 A [3.13 A]					CINT1150A4806K01
		56 V @ 1.79 A [2.68 A]					CINT1150A5606K01
[150 W]	100 W	MINT1150 Series <sup>2</sup>					
		12 V @ 8.33 A [12.5 A]				2 x 4 x 1.3 in (50.8 x 101.6 x 33)	MINT1150A1206K01
		15 V @ 6.67 A [10 A]					MINT1150A1506K01
		24 V @ 4.17 A [6.25 A]					MINT1150A2406K01
		48 V @ 2.08 A [3.13 A]					MINT1150A4806K01
		56 V @ 1.79 A [2.68 A]					MINT1150A5606K01
[150 W]	120 W	NGB150 Series <sup>3</sup>					
		12 V @ 10 A [12.5 A]				2 x 4 x 1.26 in (50.8 x 101.6 x 32)	NGB150S12K
		15 V @ 8 A [10 A]					NGB150S15K
		19 V @ 6.32 A [7.9 A]					NGB150S19K
		24 V @ 5 A [6.25 A]					NGB150S24K
		36 V @ 3.3 A [4.16 A]					NGB150S36K
		48 V @ 2.5 A [3.13 A]					NGB150S48K
180 W	MINT1180 Series <sup>2</sup>						
		12 V @ 15 A				3 x 5 x 1.3 in (76.2 x 127 x 33.6)	MINT1180A1275K01
		15 V @ 12 A					MINT1180A1575K01
		18 V @ 10 A					MINT1180A1875K01
		24 V @ 7.5 A					MINT1180A2475K01
		28 V @ 6.4 A					MINT1180A2875K01
		32 V @ 5.62 A					MINT1180A3275K01
		36 V @ 5 A					MINT1180A3675K01
		48 V @ 3.75 A					MINT1180A4875K01
[200 W]	100 W	LPQ200-M Series					
		3.3 V @ 13 A [18 A]	5 V @ 13 A [18 A]	12 V @ 5 A [9 A]	-12 V @ 1 A [2 A]	3 x 5 x 1.3 in (76.2 x 127 x 33.6)	LPQ201-M
		5 V @ 13 A [18 A]	12 V @ 5 A [9 A]	24 V @ 1.5 A [3 A]	-12 V @ 1 A [2 A]		LPQ202-M
[200 W]	120 W	LPP200 Series <sup>4</sup>					
		12 V @ 9 A [15.67 A]				2 x 4 x 0.75 in (50.8 x 101.6 x 19.1)	LPP200S12K
		24 V @ 4.5 A [7.84 A]					LPP200S24K
		48 V @ 2.25 A [3.92 A]					LPP200S48K
[240 W]	LB240S Series						
		24 V @ [10 A]				3 x 5 x 1.2 in (76.2 x 127 x 31)	LB240S24K
		48 V @ [5 A]					LB240S48K
		56 V @ [4.29 A]					LB240S56K

[<sup>1</sup>] Rating with 200 LFM of air, 30 CFM of air for LPQ200-M, LPS200-M and CPS250-M.

<sup>1</sup> Industrial safety certificate only.

<sup>2</sup> Medical safety certificate only.

<sup>3</sup> "K" - class I input, change to "C" for class II input.

<sup>4</sup> Low profile model.

Low Power							
Output Power		Output				Size W x L x H (mm)	Model
[Forced Air]	Free Air	V1	V2	V3	V4		
[200 W]	180 W	CINT1200 Series <sup>1</sup>					
		12 V @ 15 A [16.7 A]				3 x 5 x 1.2 in (76.2 x 127 x 31)	CINT1200A1206K01
		15 V @ 12 A [13.3 A]					CINT1200A1506K01
		18 V @ 10 A [11.1 A]					CINT1200A1806K01
		24 V @ 7.5 A [8.33 A]					CINT1200A2406K01
		28 V @ 6.4 A [7.14 A]					CINT1200A2806K01
		32 V @ 5.62 A [6.25 A]					CINT1200A3206K01
		36 V @ 5 A [5.55 A]					CINT1200A3606K01
		48 V @ 3.75 A [4.17 A]					CINT1200A4806K01
[225 W]	180 W	LU225 Series					
		12 V @ 13.3 A [17.5 A]				2 x 4 x 1.3 in (50.8 x 101.6 x 33)	LU225S12K
		24 V @ 7.5 A [9.38 A]					LU225S24K
		36 V @ 5 A [6.25 A]					LU225S36K
		48 V @ 3.75 A [4.69 A]					LU225S48K
		56 V @ 3.2 A [4 A]					LU225S56K
[250 W]	155 W	LPS200-M Series					
		5 V @ 20 A [40 A]				3 x 5 x 1.32 in (76.2 x 127 x 33.6)	LPS202-M
		12 V @ 10.3 A [20.8 A]					LPS203-M
		15 V @ 8.3 A [16.6 A]					LPS204-M
		24 V @ 5.2 A [10.4 A]					LPS205-M
		48 V @ 2.6 A [5.2 A]					LPS208-M
[250 W]	155 W	CPS250-M Series					
		12 V @ 12.92 A [20.83 A]				2 x 4 x 1.3 in (50.8 x 101.6 x 32.8)	CPS253-M
		24 V @ 6.45 A [10.42 A]					CPS255-M
		48 V @ 3.23 A [5.21 A]					CPS258-M
[250 W]	175 W	NGB250 Series					
		12 V @ 12.1 A [19.1 A]				2 x 4 x 1.5 in (50.8 x 101.6 x 38.1)	NGB250S12K
		15 V @ 10.3 A [15.3 A]					NGB250S15K
		24 V @ 7.3 A [10.4 A]					NGB250S24K
		28 V @ 6.2 A [8.9 A]					NGB250S28K
		48 V @ 3.6 A [5.2 A]					NGB250S48K
		56 V @ 3.1 A [4.47 A]					NGB250S56K
[275 W]	180 W	CINT1275 Series <sup>1</sup>					
		12 V @ 15 A [21.8 A]				3 x 5 x 1.4 in (76.2 x 127 x 33.6)	CINT1275A1206K01
		15 V @ 12 A [18.3 A]					CINT1275A1506K01
		24 V @ 7.5 A [10.9 A]					CINT1275A2406K01
		48 V @ 3.75 A [5.46 A]					CINT1275A4806K01
		56 V @ 3.21 A [4.68 A]					CINT1275A5606K01

[ ] Rating with 200 LFM of air, 30 CFM of air for LPQ200-M, LPS200-M and CPS250-M.

<sup>1</sup> Industrial safety certificate only.

## LOW POWER

Low Power							
Output Power		Output			Size W x L x H (mm)	Model	
[Forced Air]	Free Air	V1	V2	V3	V4		
[275 W]	180 W	MINT1275 Series <sup>2</sup>					
		12 V @ 15 A [21.8 A]				3 x 5 x 1.4 in (76.2 x 127 x 33.6)	MINT1275A1206K01
		15 V @ 12 A [18.3 A]					MINT1275A1506K01
		24 V @ 7.5 A [10.9 A]					MINT1275A2406K01
		48 V @ 3.75 A [5.46 A]					MINT1275A4806K01
		56 V @ 3.21 A [4.68 A]					MINT1275A5606K01
[300 W]	190 W	SLB300 Series					
		12 V @ 15.4 A [22.5 A]				3 x 5 x 1.22 in (76.2 x 127 x 31.1)	SLB300S12x
		15 V @ 12.7 A [20 A]					SLB300S15x
		18 V @ 10.6 A [16.7 A]					SLB300S18x
		24 V @ 7.9 A [12.5 A]					SLB300S24x
		36 V @ 5.3 A [8.3 A]					SLB300S36x
		48 V @ 4 A [6.3 A]					SLB300S48x
		56 V @ 3.4 A [5.4 A]					SLB300S56x
[300 W]	200 W	GU300 Series <sup>3</sup>					
		12 V @ 15.5 A [23.5 A]				3 x 5 x 1.22 in (76.2 x 127 x 31.1)	GU300S12K
		15 V @ 12.3 A [19 A]					GU300S15K
		18 V @ 10.2 A [15.7 A]					GU300S18K
		24 V @ 7.7 A [11.8 A]					GU300S24K
		48 V @ 3.8 A [5.9 A]					GU300S48K
		56 V @ 3.3 A [5 A]					GU300S56K
[350 W]	200 W	SLB350 Series					
		12 V @ 12 A [25 A]				3 x 5 x 1.5 in (76.2 x 127 x 38.1)	SLB350S12K
		24 V @ 8.3 A [14.6 A]					SLB350S24K
		48 V @ 4.1 A [7.3 A]					SLB350S48K
		56 V @ 3.6 A [6.25 A]					SLB350S56K
[360 W]	240 W	LPS360-M Series					
		12 V @ 20 A [30 A]				3 x 5 x 1.3 in (76.2 x 127 x 33)	LPS363-M
		15 V @ 16 A [24 A]					LPS364-M
		24 V @ 10 A [15 A]					LPS365-M
		36 V @ 6.25 A [11.25 A]					LPS366-M
		48 V @ 5 A [7.5 A]					LPS368-M
[425 W]	270 W	NGB425 Series <sup>3</sup>					
		12 V @ 19.5 A [30 A]				3 x 5 x 1.5 in (76.2 x 127 x 38.1)	NGB425S12K
		15 V @ 13.2 A [24 A]					NGB425S15K
		24 V @ 11.2 A [17.5 A]					NGB425S24K
		48 V @ 5.6 A [8.75 A]					NGB425S48K

[ ] Rating with 200 LFM of air, 100 LFM for SLB300, 30 CFM for LPS360-M.

<sup>1</sup> Industrial safety certificate only.

<sup>2</sup> Medical safety certificate only.

<sup>3</sup> "K" - class I input, change to "C" for class II input.

Low Power							
Output Power		Output				Size W x L x H (mm)	Model
[Forced Air]	Free Air	V1	V2	V3	V4		
[650 W]	400 W	CNS650 Series					
		12 V @ 54.2 A				4 x 7 x 1.6 in (101.6 x 177.8 x 40.6)	CNS653-ME
		12 V @ 54.2 A [30.8 A]				3.8 x 6 x 1.3 in (101.6 x 152.4 x 34.1)	CNS653-MF
		12 V @ 54.2 A [33.3 A]				4 x 6 x 1.5 in (101.6 x 152.4 x 39)	CNS653-MU
		24 V @ 27.1 A [16.7 A]					CNS655-MU
		48 V @ 13.5 A [8.3 A]					CNS658-MU
[660 W]	440 W	NGB660 Series <sup>3</sup>					
		12 V @ 30.6 A [46.2 A]				4 x 6 x 1.55 in (101.6 x 152.4 x 39.4)	NGB660S12K
		15 V @ 24.5 A [37 A]					NGB660S15K
		24 V @ 18.2 A [27.2 A]					NGB660S24K
		48 V @ 9.1 A [13.6 A]					NGB660S48K
[800 W]	550 W	NGB800 Series					
		12 V @ 39 A [57.5 A]				5 x 8 x 1.6 in (127 x 203.2 x 40.6)	NGB800S12K
		15 V @ 26.7 A [46 A]					NGB800S15K
		24 V @ 22.9 A [33.3 A]					NGB800S24K
		48 V @ 11.4 A [16.7 A]					NGB800S48K
[1000 W]	800 W	SLB1000 Series					
		12 V @ 66.6 A [84 A]				5.2 x 10 x 2.4 in (132 x 254 x 61.7)	SLB1000S12K
		24 V @ 33.3 A [42 A]					SLB1000S24K
		48 V @ 16.6 A [21 A]					SLB1000S48K
[1200 W]	NGB1200 Series <sup>2</sup>						
		12 V @ [100 A]				5 x 8 x 1.6 in (127 x 203.2 x 40.6)	NGB1200S12K
		24 V @ [50 A]					NGB1200S24K
		48 V @ [25 A]					NGB1200S48K

[ ] Rating with 300 LFM of air for NGB660 and NGB800, 30 CFM of air for CNS650.

<sup>1</sup> "K" - class I input, change to "C" for class II input.

<sup>2</sup> Internal fan.



#### Total Power

250 W

#### # of Outputs

Single

#### Output

12 V, 24 V, 48 V

#### Size

4" x 7" x 1.1"

#### Compliance

- EMI Class B
- EN61000 Immunity

#### Safety

- UL + CSA 62368-1  
ANSI ES60601-1 3rd Ed.
- TÜV 62368-1 / 60601-1 /  
61347-1; 2-13
- China CCC<sup>1</sup>
- CB Scheme IEC 62368-1 /  
IEC 61347-1; 2-13 /  
IEC 60601-1

<sup>1</sup> China CCC approval applies to part numbers with “-xxE” suffixes only.

## LCC250

### Convection/Conduction Mounting 250 W

#### SPECIAL FEATURES

- Wide operating temperature range suited for both outdoor and indoor applications
- 250 W fanless power supply with zero derating up to 85°C baseplate
- IP64 rated enclosure
- Conduction or convection mounting
- Differential remote sense
- Output adjust
- Output on/off (Positive or negative logic user selectable)

#### Electrical Specifications

##### Input

Input Range	90 to 264 VAC (Operating), 115/230 VAC (Nominal)
Frequency	47 to 63 Hz
Input Fusing	Internal fuse on both L and N lines
Inrush Current	50 A
Power Factor	> 0.92 full load
Harmonics	Meets EN61000-3-2; MIL-STD-461E: CE101; CE102 <sup>1</sup> ; CS101; CS104
Input Current	3.4 A @ 90 VAC full load
Hold up Time	16 ms minimum at 115 VAC; 100% load
Efficiency	230 VAC; 100% load 12 V: 89% typical 24 V: 91% typical 48 V: 91.5% typical
Leakage Current	< 275 µA at 230 VAC

#### Environmental Specifications

Operating Temperature	Suffix 4P (conduction): -40 to +85°C baseplate temperature Suffix 7P (convection): -40 to +85°C ambient temperature
Storage Temperature	-40 to +85°C
Humidity	10% to 100% (condensing & Non-condensing)
Altitude	Operating: 13,000 ft Non-operating: 50,000 ft
Shock	IEC 68-2-27
Vibration	IEC 68-2-6 / IEC 721-3-2
Ingress Protection	IP64 rated
MTBF (calculated)	> 780,000 hours at 100% load; Low line; Telcordia SR332

<sup>1</sup> 12 V output compliance to CE102 requires external filter. Consult Technical Reference Notes.

## Electrical Specifications

Output Rating	12 V @ 20.83 A; 24 V @ 10.4 A; 48 V @ 5.2 A	—
Set Point	±0.2%	Factory set point
Total Regulation Range	±2%	Line/load/temperature
Rated Load	250 W maximum	—
Minimum Load	0 A Load	No loss of regulation
Capacitive Load	0 to 330 $\mu$ F/amp	—
Constant Output Voltage Adjustment Range	12 V: +10/-10%; 24 V: +14.6/-15%; 48 V: +15%/-15%	Adjust via VR2
Constant Output Current Adjustment Range	+0/-50%	Adjust via VR1 CC mode supported from Vo nominal down to 80% Vo
Output Ripple And Noise	1%	See Note 1
Transient Response	±5% Vo max transient; recovery < 500 $\mu$ s max	50% load step @ 1 A/ $\mu$ s Step load verified at: 50% to 100% load; 90 to 264 VAC input; capacitive load from 0 to 330 $\mu$ F/Amp
Remote Sense	Capable of stable offset of ±0.5 VDC at output cable termination	+SENSE (red wire); -SENSE (black wire)
Output On/Off	Remote on/off referenced to secondary side. Positive or negative logic user selectable via CN2. Factory default is positive logic.	On/off (orange wire); on/off return (white wire)
Over-load Protection (OCP)	< 150% Io	Auto recovery
Over-voltage Protection (OVP)	110% to 135% Vo	Latching mode; requires input AC recycle
Over-temperature Protection (OTP)	—	Auto recovery; hiccup mode
Output Isolation	4000 VAC Input to Output; 1500 VAC Input to Ground; 500 VAC Output to Ground	—

## Ordering Information

Model Number	Output	Adjustment Range	Output Current		Output Ripple P/P <sup>1</sup>	Combined Line/Load Regulation
			Min	Max		
LCC250-12U-4P	12 V	±10%	0 A	20.8 A	1%	±2%
LCC250-12U-4PE <sup>3</sup>	12 V	±10%	0 A	20.8 A	1%	±2%
LCC250-12U-7P	12 V	±10%	0 A	20.8 A	1%	±2%
LCC250-12U-7PE <sup>3</sup>	12 V	±10%	0 A	20.8 A	1%	±2%
LCC250-24U-4P	24 V	+14.6/-15%	0 A	10.4 A	1%	±2%
LCC250-24U-4PE <sup>3</sup>	24 V	+14.6/-15%	0 A	10.4 A	1%	±2%
LCC250-24U-7P	24 V	+14.6/-15%	0 A	10.4 A	1%	±2%
LCC250-24U-7PE <sup>3</sup>	24 V	+14.6/-15%	0 A	10.4 A	1%	±2%
LCC250-48U-4P	48 V	±15%	0 A	5.2 A	1%	±2%
LCC250-48U-4PE <sup>3</sup>	48 V	±15%	0 A	5.2 A	1%	±2%
LCC250-48U-7P	48 V	±15%	0 A	5.2 A	1%	±2%
LCC250-48U-7PE <sup>3</sup>	48 V	±15%	0 A	5.2 A	1%	±2%

<sup>1</sup> Output ripple measured at the end of the output cable terminated with 10  $\mu$ F tantalum capacitor in parallel with 0.1  $\mu$ F ceramic capacitor.<sup>2</sup> Additional external capacitance required to meet the indicated Output Ripple Limits. Please check the Technical Reference Notes.<sup>3</sup> China CCC approval applies to part numbers with “-xxE” suffixes only.<sup>4</sup> 12 V output compliance to CE102 requires external filter. Consult Technical Reference Notes.



## LCC600

### Convection/Conduction Mounting 600 W

#### SPECIAL FEATURES

- Baseplate cooled
- -40 to 85°C operating baseplate temperature
- No derating up to 85°C baseplate temperature
- Adjustable output
- 10.6 W per in<sup>3</sup>
- Differential remote sense
- EMI Class B
- With +5 V standby @ 1.5 A
- Full DSP controlled
- Optional IP65 (“-4P” suffix) variant
- Optional 277 VAC Nominal input (“H” suffix) variant
- Active Ishare
- PMBus™
- Industrial/Medical safety (Suited for BF Type applications)

#### Total Power

600 W

#### # of Outputs

Single

#### Output

12 V, 28 V, 36 V, 48 V

#### Size

4" x 9" x 1.57"

#### Safety

- UL + CSA 62368-1 / 60601-1 3rd Ed
- TÜV 62368-1 / 60601-1
- China CCC
- CB Scheme 62368-1 / 60601-1 Certs
- UL 8750 / TUV EN 61347-1;  
-2-13 / IEC 61347-1; -2-13 (48 V output)

#### Electrical Specifications

##### Input

Input Range	90 to 264 VAC (U version) 180 to 305 VAC (H version)
Frequency	50/60/440 Hz (Agency Approval 47 to 63 Hz)
Input Fusing	12.5 A RMS on both input lines (U Suffix)
Inrush Current	< 25 A peak
Power Factor	0.99 typical
Harmonics	Meets EN61000-3-2, Class A and C MIL-STD-461F EMI: CE101, CE102, CS101, CS114, CS115 (w/ ext filter)
Input Current	< 10 Arms max at 100 VAC
Hold up Time	20 ms (main O/P @ 230 VAC)
Isolation	PRI-SEC: 4kVAC (2X MOPP) PRI-CASE: 1.5kVAC (1X MOPP) SEC-CASE: 1.5kVAC (1X MOPP)

#### Environmental Specifications

Operating Temperature	-40 to 85°C baseplate
Humidity	10% to 95%
Altitude	5000 m (16,402 ft) operating
Shock	MIL-STD-810F 516.5 Procedure I, VI
Vibration	MIL-STD-810F 514.5 CAT 4, 10
IP Rating	Optional IP65 rated enclosure (“4P” suffix)
MTBF	> 2 MHours, 25°C per SR-332 Issue 3

Ordering Information											
Model Number <sup>1</sup>	AC Input	Output Setpoint (V)	Setpoint Tolerance	Adjustment Range	Output Current [A]		Max O/P	Typical Efficiency <sup>2</sup>	Standby Output	Combined Line/Load Regulation	Output Ripple
					Min	Max					
LCC600-48U-9P	90 to 264	48	±0.5%	44 to 54	0	12.5	600	93%	5 VDC @ 1.5 A	2%	1%
LCC600-48H-9P	180 to 305	48	±0.5%	44 to 54	0	12.5	600	93%	5 VDC @ 1.5 A	2%	1%
LCC600-36U-9P	90 to 264	36	±0.5%	32 to 38	0	16.7	600	92%	5 VDC @ 1.5 A	2%	1%
LCC600-36H-9P	180 to 305	36	±0.5%	32 to 38	0	16.7	600	92%	5 VDC @ 1.5 A	2%	1%
LCC600-28U-9P	90 to 264	28	±0.5%	24 to 30	0	25	600	93.5%	5 VDC @ 1.5 A	2%	1%
LCC600-28H-9P	180 to 305	28	±0.5%	24 to 30	0	25	600	93.5%	5 VDC @ 1.5 A	2%	1%
LCC600-12U-9P	90 to 264	12	±0.5%	12 to 15	0	50	600	92%	5 VDC @ 1.5 A	2%	1%
LCC600-12H-9P	180 to 305	12	±0.5%	12 to 15	0	50	600	92%	5 VDC @ 1.5 A	2%	1%

**1** Change suffix “-9P” to “-4P” for IP65 rated enclosure with fly lead wires.

Change suffix “-4P” to “-4PR” for IP65 rated enclosure with right angle fly lead wires (applies to 28 V, 36 V, 48 V).

Change suffix “-4P” to “-4PV” for cables without control signal (applies to 28 V, 36 V and 48 V).

**2** Typical Efficiency at high line, factory default voltage and full load.

**3** When the output voltage is set as low as 24 V, it can provide a current of up to 25 A (the maximum power is 600 W).

At the default output voltage of 28 V, the output current is up to 21.43 A (the maximum power is 600 W).



## LCC1200

### Convection/Conduction Mounting 1200 W

#### SPECIAL FEATURES

- 1200 W full power at elevated temperatures
- Wide operating temperature range (-40 to 85°C baseplate)
- Adjustable output
- Remote output On/Off
- AC\_OK; DC\_OK signals
- 5 V standby voltage
- Active current share
- Conduction-cooled/fanless
- I<sup>2</sup>C / PMBus
- ITE Safety
- Active power factor correction

#### Total Power:

1200 W

#### # of Outputs

Single

#### Outputs:

24, 28, 48 Vdc

#### Safety

- UL + CSA: 62368-1
- Demko: 62368-1
- CB Scheme: 60950-1 and 62368-1
- China CCC
- CE Mark
- UKCA Mark

#### Electrical Specifications

##### Input

Input Range	90 to 264 VAC (Safety rating: 100 to 240 VAC) 1200 W at 180-264 VAC 800 W at 90-179 VAC
Frequency	47 to 63 / 440 Hz (Safety rating: 50/60 Hz)
Input Fusing	Single Fuse
EMI/RFI <sup>2</sup>	FCC Class B, CISPR22/EN55022 Class B
Inrush current	≤ 25 A peak at 264 VAC, 25°C ambient temperature, cold start, excluding X caps
Power Factor	0.99 typical
Harmonics	Meets EN61000-3-2 Class A and Class C <sup>1</sup>
Input Current	< 8 Arms @ 180 VAC
Hold up Time	20 ms min for Main Output (230 VAC) @ 100% Load
Efficiency	Typical @ 230 VAC; 100% Load; 28 VDC 93.5% Efficiency at 25°C baseplate temperature (35°C ambient)
Leakage Current	< 3.5 mA max per IEC 62368-1 Standard
Isolation Voltage	PRI-SEC: 3,000 VAC PRI-Chassis: 1,500 VAC SEC-Chassis: 500 VAC

<sup>1</sup> Meets Class C at 100% load.

<sup>2</sup> On the -9P units, it is recommended to use a snap-on ferrite Wurth pn 74271222 (or equivalent) on the AC input cable to comply with EMI radiated spec.

Environmental Specifications	
Operating Temperature Range	-40 to +85°C Baseplate temperature
Storage Temperature	-40 to +85°C
Humidity	10% to 95%
Altitude	16,402 ft (Operating) / 50,000 ft (Non-Operating)
Shock	MIL-STD-810F 516.5 Procedure I, VI
Vibration	MIL-STD-810F 514.5 Cat. 4, 10
Ingress Protection	IP65 (for suffix "-4P")
MTBF (Calculated)	>2M Hrs, 25°C per SR-332 Issue 3
Electromagnetic Immunity	Designed to meet EN61000-4-3, -4, -5, -8, -11 (Level 3); EN61000-4-2 (Level 4); EN55035

Ordering Information								
SERIES	Nominal Output Voltage	Trimming Range		Setpoint	Pout, Max	Iout, Max	Output Ripple	Line/Load/Temp Regulation
		Minimum	Maximum					
LCC1200-28U-4P	28	24	30	±0.5%	1200	42.9	1%	2%
LCC1200-28U-9P	28	24	30	±0.5%	1200	42.9	1%	2%
LCC1200-28U-4P24	24	24	24	±0.5%	1200	50.0	1%	2%
LCC1200-28U-9P24	24	24	24	±0.5%	1200	50.0	1%	2%
LCC1200-48U-4P	48	42	57.6	±0.5%	1200	25.0	1%	2%
LCC1200-48U-9P	48	40	57.6	±0.5%	1200	25.0	1%	2%

\*Change suffix "-9P" to "-4P" for IP65 rated enclosure with fly lead wires

\*Change suffix "-4P" to "-4PV" to omit the control cable)

\*Add suffix "CC" for Constant Current setting (e.g. "-4PCC"; "-9PCC")



#### Total Power

- CX06S 600 W
- CX06M 600 W

#### Slots

4, 4

#### Cooling

No fan featured, convection-cooled

#### Parameters

215.9 mm x 114.3 mm x 39.1 mm  
(8.5 in x 4.5 in x 1 U)

#### Certification and Compliance

##### Medical

- IEC60601-1 3rd edition, IEC60601-1-2 4th edition (EMC)
- Dual fused
- 2 MOPP

##### Industrial

- IEC60950, IEC62368-1
- SEMI F47<sup>1</sup>

##### Defense/Aero

- MIL-STD-810G

<sup>1</sup> SEMI F47 compliant at input voltages > 180 VAC. Consult Advanced Energy for details.

## CoolX® 600 Series

Fanless, Natural Convection-Cooled Modular Power Supply

#### SPECIAL FEATURES

##### No Fan Featured

- 600 W with 100% natural convection cooling
- No base plate needed
- No acoustic noise or vibrations

- Safety approved to 5000 m altitude
- > 94% efficiency
- Five-year warranty

##### Reliability

- MTBF > 400,000 hours, 25% better than today's leading solutions
- High input surge protection — 4 kV line to PE for harsh environments
- Reverse energy protection — No blocking diodes required
- 24 W always ON auxiliary power output

##### Flexibility

- Analog and digital management — PMBus™ monitoring and control capability
- Field-configurable — plug and play power
- Series and parallel outputs — higher voltages/currents
- Mounting options — base/side and DIN-Rail mounting

#### TYPICAL APPLICATIONS

##### Medical

- Clinical diagnostic equipment, medical lasers, dialysis equipment, radiological imaging, clinical chemistry

##### Hi Rel

- Harsh industrial electronics, radar (naval and ground-based), communications, test and measurement

##### Industrial

- Test and measurement, industrial machines, automation equipment, printing, telecommunications, audio equipment

#### Environmental Specifications

Operating Temperature	Operates to specification below -20°C after 10 min warm-up, -40 to 85°C
Storage Temperature	-40 to 85°C
Derating	See derating curves
Relative Humidity	Non-condensing, 5 to 95% RH
Shock and Vibration	MIL-STD-810G Method 514.6
Altitude	5000 m

CoolX CoolMods Table				
Parameter	V <sub>nom</sub> (V)	Set Point Adjust Range (V)	I <sub>max</sub> (A)	Power (W)
<b>Single Output Modules (1 Slot)</b>				
CmA	5	2.5 to 6.0	21.0	105
CmB <sup>1</sup>	12	6.0 to 15.0 <sup>2</sup>	15.0	180
CmC	24	15.0 to 28.0	8.3	200
CmD	48	28.0 to 50.4 <sup>3</sup>	4.2	200
<b>High Power Modules (3 Slot)</b>				
CmE <sup>4</sup>	24	24 to 25.2	25.0	550*
CmF <sup>4</sup>	48	48 to 50.4	12.5	550*
<b>Dual Output Modules (1 Slot)</b>				
CmG <sup>5</sup> V1	24	3.0 to 30.0	3.0	90
V2	24	3.0 to 30.0	3.0	90
CmH <sup>6</sup> V1	5	3.0 to 6.0	6.0	36
V2	24	3.0 to 30.0	3.0	90
<b>Wide Trim Modules (1 Slot)</b>				
CmA-W01	5	1.0 to 6.0	21.0	105
CmB-W01	12	1.0 to 15.0 <sup>2</sup>	15.0	180
CmC-W01	24	2.0 to 28.0	8.3	200
CmD-W01	48	3.0 to 58.0 <sup>3</sup>	4.2	200
<b>High Voltage Modules (1 Slot)</b>				
CmK <sup>7</sup>	200	175 to 205	0.6	132

**1** Full dynamic specifications may not be met at full load when output voltage is trimmed above 13 V

**2** Max Trim 14 V when used with High Power Module

**3** Max Trim 56 V when used with High Power Module

**4** a) Only one High Power module (CmE or CmF) can be used per CoolPac

b) During load transients starting from 0% load on the High Power modules, other modules in the CoolPac may experience an output voltage dynamic during the load change. Contact applications support for details or support.

**5** For the CmG module the max combined power of both outputs is 120 W

**6** For the CmH module the max combined power of both outputs is 100 W

**\*** Max Power of CoolPac is 550 W when High Power Module is used

**\*\*** SEMI F47 compliant at input voltages > 180 VAC. Consult Advanced Energy for details

**7** CmK module cannot be used in the same pack as a CmE or CmF module



#### Total Power

- CX10S 1000 W
- CX10M 1000 W

#### Slots

6, 6

#### Cooling

No fan featured

#### Parameters

259.5 mm x 164 mm x 40.6 mm  
(10 in x 6.5 in x 1U)

#### Certification and Compliance

##### Medical

- IEC60601-1 3rd edition, IEC60601-1-2 4th edition (EMC)
- 2 MOPP
- Dual fused

##### Industrial

- IEC60950, IEC62368-1
- SEMI F47<sup>1</sup>

##### Defense/Aero

- MIL-STD-810G

1. SEMI F47 compliant at input voltages > 180 VAC. Consult Advanced Energy for details.

## CoolX® 1000 Series

Fanless, Intelligent 1000 W Modular Power Supplies

#### SPECIAL FEATURES

##### No Fan Featured

- 1000 W with 100% natural convection cooling
- No base plate needed
- No acoustic noise or vibrations

##### Reliability

- MTBF > 2,900,000 hours
- High input surge protection — 4 kV line to PE for harsh environments
- Reverse energy protection — No blocking diodes required
- 24 W standby power

- Safety approved to 5000 m altitude
- 93% efficiency
- Five-year warranty

##### Flexibility

- Analog and digital management — PMBus™ monitoring and control capability
- Field-configurable — plug and play power
- Series and parallel outputs — higher voltages/currents
- Mounting options — base/side and DIN-Rail mounting

#### TYPICAL APPLICATIONS

##### Medical

- Clinical diagnostic equipment, medical lasers, dialysis equipment, radiological imaging, clinical chemistry

##### Hi Rel

- Harsh industrial electronics, radar (naval and ground-based), communications, test and measurement

##### Industrial

- Test and measurement, industrial machines, automation equipment, printing, telecommunications, audio equipment

#### Environmental Specifications

Operating Temperature	Operates to specification below -20°C after 10 min warm-up, -40 to 85°C
Storage Temperature	-40 to 85°C
Derating	See derating curves included in the CoolX1000 Designers Manual
Relative Humidity	Non-condensing, 5 to 95% RH
Shock and Vibration	MIL-STD-810G Method 514.6
Altitude	Max 5000 m

CoolX CoolMods				
Single Output Modules (1 Slot)	V <sub>nom</sub> (V)	Set Point Adjust Range (V)	I <sub>max</sub> (A)	Power (W)
CmA	5	2.5 to 6.0	21.0	105
CmB <sup>1</sup>	12	6.0 to 15.0 <sup>2</sup>	15.0	180
CmC	24	15.0 to 28.0	8.3	200
CmD	48	28.0 to 58.0 <sup>3</sup>	4.2	200
High Power Modules (3 Slot)				
CmE <sup>4</sup>	24	24 to 25.2	25.0	600
CmF <sup>4</sup>	48	48 to 50.4	12.5	600
Dual Output Modules (1 Slot)				
CmG <sup>5</sup> V1	24	3.0 to 30.0	3.0	90
V2	24	3.0 to 30.0	3.0	90
CmH <sup>6</sup> V1	5	3.0 to 6.0	6.0	36
V2	24	3.0 to 30.0	3.0	90
Wide Trim Modules (1 Slot)				
CmA-W01	5	1.0 to 6.0	21.0	105
CmB-W01	12	1.0 to 15.0 <sup>2</sup>	15.0	180
CmC-W01	24	2.0 to 28.0	8.3	200
CmD-W01	48	3.0 to 58.0 <sup>3</sup>	4.2	200
High Voltage Modules (1 Slot)				
CmK <sup>7</sup>	200	175 to 205	0.6	132

**1** Full dynamic specifications may Not be met at full load when output voltage is trimmed above 13 V

**2** Max Trim 14 V when used with High Power Module

**3** Max Trim 56 V when used with High Power Module

**4** a) Only one High Power module (CmE or CmF) can be used per CoolPac

b) During load transients starting from 0% load on the High Power modules, other modules in the CoolPac may experience an output voltage dynamic during the load change. Contact applications support for details or support.

**5** For the CmG module the max combined power of both outputs is 120 W

**6** For the CmH module the max combined power of both outputs is 100 W

**7** When a CmK module is used in the same pack as a CmE or CmF module, one module slot must remain unpopulated.



#### Total Power

- CS10S 1000 W
- CS10M 1000 W

#### Output Voltage

24 V, 48 V

#### Safety

##### Medical

- IEC60601-1 3rd edition
- 2 MOPP
- Dual fused

##### Industrial

- IEC62368-1
- ISO9001:2015
- SEMI F47<sup>1</sup>

1. SEMI F47 compliant at input voltages > 180 VAC. Consult Advanced Energy for details.

## CS1000 Series

### Fanless, 1U, High Efficiency 1000 W Single Output Power Supplies

#### SPECIAL FEATURES

##### No Fan Featured

- 1000 W with 100% natural convection cooling
- No base plate needed
- No acoustic noise or vibrations

##### Reliability

- High input surge protection — 4 kV line to PE for harsh environments
- Reverse energy protection — No blocking diodes required
- User selectable (5 V / 12 V) 24 W always ON auxiliary power output
- N+1 Redundancy Ready

- Can be paralleled for higher power
- Optional low leakage (<150 uA)
- Safety approved to 5000 m altitude
- Programmable start-up state (Default ON or Default OFF)
- > 94% efficiency
- Five-year warranty

##### Flexibility

- Analog and digital management — PMBus™ monitoring and control capability
- Mounting options: base/side and DIN-Rail mounting

#### TYPICAL APPLICATIONS

##### Medical

- Clinical diagnostic equipment, medical lasers, dialysis equipment, radiological imaging, clinical chemistry

##### Hi Rel

- Harsh industrial electronics, radar (naval and ground-based), communications, test and measurement

##### Industrial

- Test and measurement, industrial machines, automation equipment, printing, telecommunications, audio equipment

#### Environmental Specifications

Operating Temperature	Operates to specification below -20°C after 10 min warm-up, -40 to 85°C
Storage Temperature	-40 to 85°C
Derating	See derating curves
Relative Humidity	Non-condensing, 5 to 95% RH
Altitude	Max 5000 m
Vibration	810G: Method 514.6, Procedure I (General Vibration). Category 4 Common Carrier (US Highway truck vibration exposure) Fig.514.6C-1. Category 4 Composite 2 wheeled trailer vibration exposure, Fig.514.6C-2. Category 4 Composite wheeled vehicle vibration exposure, Fig.514.6C-3.

	<b>CS1000-24</b>	<b>CS1000-48</b>
Power (W)	1000	1000
Output Voltage (V)	24	48
Output Current (A)	41.6	20.8
Medical Approval UL/EN60601-1, 3rd Edition	Yes	Yes
Industrial Approval UL/EN62368, 2nd Edition	Yes	Yes
V <sub>nom</sub> (V)	24	48
Description	Convection-cooled U-channel	Convection-cooled U-channel
Output Adjustment Range (V)	22 to 28	44 to 56
Dynamic Vtrim Range (V)	22 to 28	44 to 56
I <sub>out</sub> I <sub>max</sub> (A)	41.6	20.8
Remote Sense	Yes	Yes
Power Good	Yes	Yes
AC Good	Yes	Yes

## LOW POWER

# Low Power

### External Power Adapters

5 to 240 W

### SPECIAL FEATURES

#### All Models Feature

- Wide-range AC input
- High demonstrated MTBF
- Over-load protection
- Extensive safety approvals

#### Many Models Feature

- EN61000-3-2 compliance
- Medical approvals
- Thermal protection
- Energy Star/ErP
- DoE Level VI
- EU CoC v5 Tier 2

#### AC Input

- Wallmount
  - U.S. – 2-prong
  - China – 2-prong
  - Europe – 2-prong
  - United Kingdom – 3-prong
  - Australia – 2-prong
  - Korea – 2-prong
  - Japan – 2-prong
  - Interchangeable
- Freestanding
  - IEC320 3-pin (C14) & (C6)
  - IEC320 2-pin (C8) & (C18)

#### DC Output

- Single output
  - 2.5 mm barrel plug
  - 2.1 mm barrel plug
  - 6-pin Minifit
  - USB A port
  - 4-pin Snap n Lock
- Dual output
  - Barrel plug & USB port

#### External Adapter

Output Power	Output		Size W x L x H (mm)	Model
	V1	V2		
<b>6 W</b>				<b>SLE06 Series (Level VI)<sup>1,2,3</sup></b>
	5 V @ 1 A		1.67 x 2.89 x 1.21 in (42.5 x 73.5 x 30.7)	SLE06S0503B01
	9 V @ 0.6 A		1.67 x 2.89 x 1.21 in (42.5 x 73.5 x 30.7)	SLE06S0903B01
	12 V @ 0.5 A		1.67 x 2.89 x 1.21 in (42.5 x 73.5 x 30.7)	SLE06S1203B01
<b>10 W</b>				<b>ME10 Series (Level VI)<sup>4,5,6,7</sup></b>
	5 V @ 2 A		1.85 x 3.31 x 1.49 in (47 x 84 x 38)	ME10A0503F01
	5.9 V @ 1.67 A		1.85 x 3.31 x 1.49 in (47 x 84 x 38)	ME10A0603F01
	7.5 V @ 1.33 A		1.85 x 3.31 x 1.49 in (47 x 84 x 38)	ME10A0703F01
	9 V @ 1.33 A		1.85 x 3.31 x 1.49 in (47 x 84 x 38)	ME10A0903F01
	12 V @ 1 A		1.85 x 3.31 x 1.49 in (47 x 84 x 38)	ME10A1203F01
	15 V @ 0.8 A		1.85 x 3.31 x 1.49 in (47 x 84 x 38)	ME10A1503F01
	24 V @ 0.5 A		1.85 x 3.31 x 1.49 in (47 x 84 x 38)	ME10A2403F01
<b>10 W</b>				<b>TE10 Series (Level VI)<sup>4,5,6,7</sup></b>
	5 V @ 2 A		1.85 x 3.31 x 1.49 in (47 x 84 x 38)	TE10A0503F01
	5.9 V @ 1.67 A		1.85 x 3.31 x 1.49 in (47 x 84 x 38)	TE10A0603F01
	7.5 V @ 1.33 A		1.85 x 3.31 x 1.49 in (47 x 84 x 38)	TE10A0703F01
	12 V @ 1 A		1.85 x 3.31 x 1.49 in (47 x 84 x 38)	TE10A1203F01
	24 V @ 0.5 A		1.85 x 3.31 x 1.49 in (47 x 84 x 38)	TE10A2403F01

#### Options

**1** "B" in the model number indicates interchangeable blade model (SLE06S0503B01). "C" = N.A.fixed blade input (SLE06S0503C01).  
**2** "03" in the model number indicates 2.5 x 5.5 x 9.5 mm straight barrel type connector. "99" indicates USB "A" port output. Other output connector options are available, contact AE sales for details.

**3** Power supply is not fitted with the AC blade, this is to be ordered separately.

**4** "F" in the model number indicates class I desktop C14 receptacle. "N" = class II desktop C8 receptacle (ME10A0503N01, TE10A0503N01). "Q" = class II desktop C18 receptacle (ME10A0503Q01, TE10A0503Q01). "B" = class II wall-plug interchangeable blade (ME10A0503B01, TE10A0503B01). "C" = class II wall plug fixed north American blade (ME10A0503C01, TE10A0503C01).

**5** Order blade kit KT-1027K for other blades (EU, UK, Australia).

**6** For input Class I models: for AC GND connected to output common (-), insert a "B" in the part number where the "A" is located (ME10B0503F01, TE10B0503F01).

**7** For EU fixed blades, replace "C" in the model number with "M", for UK blades, replace "C" with "G", for Australia blades, replace "C" with "H".

External Adapter				
Output Power	Output		Size W x L x H (mm)	Model
	V1	V2		
<b>10 W</b>	<b>DA10-M Series (Level VI)</b>			
	5 V @ 2 A		1.10 x 2.36 x 2.14 in (28 x 60 x 54.3)	DA10-050AU-M
	5 V @ 2 A		1.10 x 2.36 x 2.48 in (28 x 60 x 63.1)	DA10-050EU-M
	5 V @ 2 A		1.98 x 2.36 x 1.90 in (50.2 x 60 x 48.3)	DA10-050UK-M
	5 V @ 2 A		1.10 x 2.36 x 1.99 in (28 x 60 x 50.6)	DA10-050US-M
	5 V @ 2 A		1.1 x 2.36 x 2.06 in (28 x 60 x 52.3)	DA10-050MP-M <sup>1</sup>
	5 V @ 2 A		1.1 x 2.36 x 2.06 in (28 x 60 x 52.3)	DA10-050MP-M2 <sup>1,2</sup>
	5 V @ 2 A		1.1 x 2.36 x 2.06 in (28 x 60 x 52.3)	DA10-050MP-M402 <sup>3</sup>
<b>12 W</b>	<b>SLE12 Series (Level VI)</b> <sup>4,5</sup>			
	5 V @ 2 A		1.89 x 2.99 x 1.19 in (48.2 x 76 x 30.3)	SLE12S0503B01
	12 V @ 1 A		1.89 x 2.99 x 1.19 in (48.2 x 76 x 30.3)	SLE12S1203B01
	18 V @ 0.6 A		1.89 x 2.99 x 1.19 in (48.2 x 76 x 30.3)	SLE12S1803B01
	24 V @ 0.5 A		1.89 x 2.99 x 1.19 in (48.2 x 76 x 30.3)	SLE12S2403B01
<b>18 W</b>	<b>SLE18 Series (Level VI)</b> <sup>4,5</sup>			
	5 V @ 3 A		2.24 x 3.46 x 1.18 in (57 x 88 x 30)	SLE18S0503B01
	12 V @ 1.5 A		2.24 x 3.46 x 1.18 in (57 x 88 x 30)	SLE18S1203B01
	18 V @ 1 A		2.24 x 3.46 x 1.18 in (57 x 88 x 30)	SLE18S1803B01
	24 V @ 0.7 A		2.24 x 3.46 x 1.18 in (57 x 88 x 30)	SLE18S2403B01
<b>20 W</b>	<b>ME20 Series (Level VI)</b> <sup>6,7,8,9,10</sup>			
	5 V @ 3 A		1.85 x 3.31 x 1.49 in (47 x 84 x 38)	ME20A0503F01
	5.9 V @ 2.5 A		1.85 x 3.31 x 1.49 in (47 x 84 x 38)	ME20A0603F01
	7.5 V @ 2 A		1.85 x 3.31 x 1.49 in (47 x 84 x 38)	ME20A0703F01
	9 V @ 2 A		1.85 x 3.31 x 1.49 in (47 x 84 x 38)	ME20A0903F01
	12 V @ 1.5 A		1.85 x 3.31 x 1.49 in (47 x 84 x 38)	ME20A1203F01
	15 V @ 1.2 A		1.85 x 3.31 x 1.49 in (47 x 84 x 38)	ME20A1503F01
	18 V @ 1 A		1.85 x 3.31 x 1.49 in (47 x 84 x 38)	ME20A1803F01
	24 V @ 0.83 A		1.85 x 3.31 x 1.49 in (47 x 84 x 38)	ME20A2403F01
	48 V @ 0.42 A		1.85 x 3.31 x 1.49 in (47 x 84 x 38)	ME20A4803F01

**Options**

- 1 Interchangeable AC plug must be purchased separately.
- 2 2.1 x 5.5 mm barrel plug
- 3 μUSB connector
- 4 "03" in the model number indicates 2.5 x 5.5 x 9.5 mm straight barrel type connector (SLE12S0503B01, SLE18S0503B01). "99" indicates USB "A" port output (SLE18S0599B01). Other output connector options are available, contact AE sales for details.
- 5 "B" in the model number (SLE12S0503B01, SLE18S0503B01) indicates interchangeable blade model. Power supply is not fitted with the AC blade, this is to be ordered separately.
- 6 For input Class I models: For AC GND connected to output common (-), insert a "B" in the part number where the "A" is located (ME20B0503F01).
- 7 "03" in the model number indicates 2.5 x 5.5 x 9.5 mm straight barrel type connector. Other output connector options are available, contact AE sales for details.
- 8 "F" in the model number indicates class I desktop C14 receptacle. "N" = class II desktop C8 receptacle (ME20A0503N01). "Q" = class II desktop C18 receptacle (ME20A0503Q01).
- 9 "B" = class II wall-plug interchangeable blade (ME20A0503B01). "C" = class II wall plug fixed north American blade (ME20A0503C01).
- 10 Power supply is not fitted with the AC blade, this is to be ordered separately. Order blade kit KT-1027K for other blades (EU, UK, Australia). For EU fixed blades, replace "C" in the model number with "M", for UK blades, replace "C" with "G", for Australia blades, replace "C" with "H".

## EXTERNAL POWER ADAPTER

External Adapter				
Output Power	Output		Size W x L x H (mm)	Model
	V1	V2		
<b>20 W</b>	<b>TE20 Series (Level VI)<sup>1,2,3,4,5</sup></b>			
	5 V @ 3 A		1.85 x 3.31 x 1.49 in (47 x 84 x 38)	TE20A0503F01
	5.9 V @ 2.5 A		1.85 x 3.31 x 1.49 in (47 x 84 x 38)	TE20A0603F01
	7.5 V @ 2 A		1.85 x 3.31 x 1.49 in (47 x 84 x 38)	TE20A0703F01
	9 V @ 2 A		1.85 x 3.31 x 1.49 in (47 x 84 x 38)	TE20A0903F01
	12 V @ 1.5 A		1.85 x 3.31 x 1.49 in (47 x 84 x 38)	TE20A1203F01
	15 V @ 1.2 A		1.85 x 3.31 x 1.49 in (47 x 84 x 38)	TE20A1503F01
	18 V @ 1.1 A		1.85 x 3.31 x 1.49 in (47 x 84 x 38)	TE20A1803F01
	24 V @ 0.83 A		1.85 x 3.31 x 1.49 in (47 x 84 x 38)	TE20A2403F01
	48 V @ 0.42 A		1.85 x 3.31 x 1.49 in (47 x 84 x 38)	TE20A4803F01
<b>24 W</b>	<b>AD24 (Level VI)</b>			
	12 V @ 2 A		1.89 x 4.13 x 1.3 in (48 x 105 x 33)	AD2412N3L-VI
<b>24 W</b>	<b>SLE24 Series (Level VI)<sup>4,6,7</sup></b>			
	9 V @ 2.3 A		1.67 x 2.89 x 1.21 in (42.5 x 73.5 x 30.7)	SLE24S0903B01
	12 V @ 2 A		1.67 x 2.89 x 1.21 in (42.5 x 73.5 x 30.7)	SLE24S1203B01
	24 V @ 1 A		1.67 x 2.89 x 1.21 in (42.5 x 73.5 x 30.7)	SLE24S2403B01
	48 V @ 0.5 A		1.67 x 2.89 x 1.21 in (42.5 x 73.5 x 30.7)	SLE24S4803B01
<b>24 W</b>	<b>GE30D<sup>8</sup></b>			
	5 V @ 2.4 A	5 V @ 2.4 A	2.36 x 5.24 x 1.34 in (60 x 133 x 34)	GE30D0502F01
<b>30 W</b>	<b>ME30 Series (Level VI)<sup>1,2,3,4,5</sup></b>			
	5 V @ 4 A		2.16 x 3.78 x 1.32 in (55 x 96 x 33.6)	ME30A0503F01
	9 V @ 3 A		2.16 x 3.78 x 1.32 in (55 x 96 x 33.6)	ME30A0903F01
	12 V @ 2.5 A		2.16 x 3.78 x 1.32 in (55 x 96 x 33.6)	ME30A1203F01
	15 V @ 2 A		2.16 x 3.78 x 1.32 in (55 x 96 x 33.6)	ME30A1503F01
	18 V @ 1.67 A		2.16 x 3.78 x 1.32 in (55 x 96 x 33.6)	ME30A1803F01
	24 V @ 1.33 A		2.16 x 3.78 x 1.32 in (55 x 96 x 33.6)	ME30A2403F01
	48 V @ 0.63 A		2.16 x 3.78 x 1.32 in (55 x 96 x 33.6)	ME30A4803F01

### Options

- For input Class I models: For AC GND connected to output common (-), insert a "B" in the part number where the "A" is located (ME20B0503F01).
- "03" in the model number indicates 2.5 x 5.5 x 9.5 mm straight barrel type connector. Other output connector options are available, contact AE sales for details.
- "F" in the model number indicates class I desktop C14 receptacle. "N" = class II desktop C8 receptacle (TE20A0503N01). "Q" = class II desktop C18 receptacle (TE20A0503Q01).
- "B" = class II wall-plug interchangeable blade (TE20A0503B01). "C" = class II wall plug fixed north American blade (TE10A0503C01).
- Power supply is not fitted with the AC blade, this is to be ordered separately. Order blade kit KT-1027K for other blades (EU, UK, Australia).
- For EU fixed blades, replace "C" in the model number with "M", for UK blades, replace "C" with "G", for Australia blades, replace "C" with "H".
- "B" in the model number indicates interchangeable blade model (SLE24S0503B01). "C" = N.A.fixed blade input (12 V model only).
- "03" in the model number indicates 2.5 x 5.5 x 9.5 mm straight barrel type connector. "99" indicates USB "A" port output. Other output connector options are available, contact AE sales for details.
- 2.1 x 5.5 x 9.5 mm straight barrel type, center positive for V1; USB "A" female port for V2.

## External Adapter

Output Power	Output		Size W x L x H (mm)	Model
	V1	V2		
<b>30 W</b>	<b>TE30 Series (Level VI)<sup>1,2,3,4,5</sup></b>			
	5 V @ 4 A		2.16 x 3.78 x 1.32 in (55 x 96 x 33.6)	TE30A0503F01
	9 V @ 3 A		2.16 x 3.78 x 1.32 in (55 x 96 x 33.6)	TE30A0903F01
	12 V @ 2.5 A		2.16 x 3.78 x 1.32 in (55 x 96 x 33.6)	TE30A1203F01
	15 V @ 2 A		2.16 x 3.78 x 1.32 in (55 x 96 x 33.6)	TE30A1503F01
	18 V @ 1.67 A		2.16 x 3.78 x 1.32 in (55 x 96 x 33.6)	TE30A1803F01
	24 V @ 1.33 A		2.16 x 3.78 x 1.32 in (55 x 96 x 33.6)	TE30A2403F01
	48 V @ 0.63 A		2.16 x 3.78 x 1.32 in (55 x 96 x 33.6)	TE30A4803F01
<b>36 W</b>	<b>SLE36 Series (Level VI)<sup>2,4,6</sup></b>			
	9 V @ 3 A		1.99 x 3.81 x 1.29 in (50.5 x 96.7 x 33)	SLE36S0903B01
	12 V @ 3 A		1.99 x 3.81 x 1.29 in (50.5 x 96.7 x 33)	SLE36S1203B01
	24 V @ 1.5 A		1.99 x 3.81 x 1.29 in (50.5 x 96.7 x 33)	SLE36S2403B01
	36 V @ 1 A		1.99 x 3.81 x 1.29 in (50.5 x 96.7 x 33)	SLE36S3603B01
<b>40 W</b>	<b>ME40 Series (Level VI)<sup>1,2,3,4,5</sup></b>			
	5 V @ 5 A		2.16 x 3.78 x 1.32 in (55 x 96 x 33.6)	ME40A0503B01
	9 V @ 4 A		2.16 x 3.78 x 1.32 in (55 x 96 x 33.6)	ME40A0903B01
	12 V @ 3.4 A		2.16 x 3.78 x 1.32 in (55 x 96 x 33.6)	ME40A1203B01
	18 V @ 2.22 A		2.16 x 3.78 x 1.32 in (55 x 96 x 33.6)	ME40A1803B01
	24 V @ 1.7 A		2.16 x 3.78 x 1.32 in (55 x 96 x 33.6)	ME40A2403B01
<b>40 W</b>	<b>TE40 Series (Level VI)<sup>1,2,3,4,5</sup></b>			
	5 V @ 5 A		2.16 x 3.78 x 1.32 in (55 x 96 x 33.6)	TE40A0503F01
	12 V @ 3.4 A		2.16 x 3.78 x 1.32 in (55 x 96 x 33.6)	TE40A1203F01
	15 V @ 2.7 A		2.16 x 3.78 x 1.32 in (55 x 96 x 33.6)	TE40A1503F01
	18 V @ 2.2 A		2.16 x 3.78 x 1.32 in (55 x 96 x 33.6)	TE40A1803F01
	24 V @ 1.7 A		2.16 x 3.78 x 1.32 in (55 x 96 x 33.6)	TE40A2403F01
<b>48 W</b>	<b>SLE48 Series (Level VI)<sup>2,7</sup></b>			
	9 V @ 5 A		2.01 x 4.8 x 1.24 in (51 x 122 x 31.5)	SLE48S0903F01
	12 V @ 4 A		2.01 x 4.8 x 1.24 in (51 x 122 x 31.5)	SLE48S1203F01
	15 V @ 3.2 A		2.01 x 4.8 x 1.24 in (51 x 122 x 31.5)	SLE48S1503F01
	18 V @ 2.66 A		2.01 x 4.8 x 1.24 in (51 x 122 x 31.5)	SLE48S1803F01
	24 V @ 2 A		2.01 x 4.8 x 1.24 in (51 x 122 x 31.5)	SLE48S2403F01
	48 V @ 1 A		2.01 x 4.8 x 1.24 in (51 x 122 x 31.5)	SLE48S4803F01

## Options

- 1 For input Class I models: For AC GND connected to output common (-), insert a "B" in the part number where the "A" is located (ME40B0503F01).
- 2 "03" in the model number indicates 2.5 x 5.5 x 9.5 mm straight barrel type connector. Other output connector options are available, contact AE sales for details.
- 3 "F" in the model number indicates class I desktop C14 receptacle. "N" = class II desktop C8 receptacle (TE30A0503N01). "Q" = class II desktop C18 receptacle (TE30A0503Q01). "B" = class II wall-plug interchangeable blade (TE30A0503B01). "C" = class II wall plug fixed north American blade (TE30A0503C01).
- 4 Power supply is not fitted with the AC blade, this is to be ordered separately. Order blade kit KT-1027K for other blades (EU, UK, Australia).
- 5 For EU fixed blades, replace "C" in the model number with "M", for UK blades, replace "C" with "G", for Australia blades, replace "C" with "H".
- 6 "B" in the model number indicates interchangeable blade model (SLE36S0503B01).
- 7 "F" in the model number indicates class I desktop C14 receptacle. "N" = class II desktop C8 receptacle (SLE48S0903F01). C6 (class I) and C18 (class II) inputs are available. Contact our sales representative for details.

## EXTERNAL POWER ADAPTER

External Adapter				
Output Power	Output		Size W x L x H (mm)	Model
	V1	V2		
60 W	ME60 Series (Level VI) <sup>1,2,3,4</sup>			
	5 V @ 7 A		2.67 x 4.25 x 1.28 in (67.9 x 108 x 32.5)	ME60A0551F01
	9 V @ 6 A		2.67 x 4.25 x 1.28 in (67.9 x 108 x 32.5)	ME60A0903F01
	12 V @ 5 A		2.67 x 4.25 x 1.28 in (67.9 x 108 x 32.5)	ME60A1203F01
	15 V @ 4 A		2.67 x 4.25 x 1.28 in (67.9 x 108 x 32.5)	ME60A1503F01
	18 V @ 3.3 A		2.67 x 4.25 x 1.28 in (67.9 x 108 x 32.5)	ME60A1803F01
	24 V @ 2.7 A		2.67 x 4.25 x 1.28 in (67.9 x 108 x 32.5)	ME60A2403F01
60 W	TE60 Series (Level VI) <sup>1,2,3,4</sup>			
	5 V @ 3 A		2.67 x 4.25 x 1.29 in (67.9 x 108 x 32.7)	TE60A0551F01
	5.9 V @ 2.5 A		2.67 x 4.25 x 1.29 in (67.9 x 108 x 32.7)	TE60A0603F01
	7.5 V @ 2 A		2.67 x 4.25 x 1.29 in (67.9 x 108 x 32.7)	TE60A0703F01
	9 V @ 2 A		2.67 x 4.25 x 1.29 in (67.9 x 108 x 32.7)	TE60A0903F01
	12 V @ 1.5 A		2.67 x 4.25 x 1.29 in (67.9 x 108 x 32.7)	TE60A1203F01
	15 V @ 1.2 A		2.67 x 4.25 x 1.29 in (67.9 x 108 x 32.7)	TE60A1503F01
	18 V @ 1.1 A		2.67 x 4.25 x 1.29 in (67.9 x 108 x 32.7)	TE60A1803F01
	24 V @ 0.83 A		2.67 x 4.25 x 1.29 in (67.9 x 108 x 32.7)	TE60A2403F01
60 W	SLE60 Series (Level VI) <sup>6,7</sup>			
	5, 9, 12, 15, 20 V @ 3 A		1.67 x 2.89 x 1.21 in (42.5 x 73.5 x 30.7)	SLE60SPD96N01
	5, 9, 12, 15, 20 V @ 3 A		1.67 x 2.89 x 1.21 in (42.5 x 73.5 x 30.7)	SLE60SPD96B01
65 W	SLE65 Series (Level VI) <sup>2,8</sup>			
	9 V @ 5.4 A		2.44 x 4.91 x 1.34 in (62 x 124.6 x 34)	SLE65S0903F01
	12 V @ 5.4 A		2.44 x 4.91 x 1.34 in (62 x 124.6 x 34)	SLE65S1203F01
	15 V @ 4.3 A		2.44 x 4.91 x 1.34 in (62 x 124.6 x 34)	SLE65S1503F01
	18 V @ 3.6 A		2.44 x 4.91 x 1.34 in (62 x 124.6 x 34)	SLE65S1803F01
	24 V @ 2.7 A		2.44 x 4.91 x 1.34 in (62 x 124.6 x 34)	SLE65S2403F01
	48 V @ 1.3 A		2.44 x 4.91 x 1.34 in (62 x 124.6 x 34)	SLE65S4803F01
90 W	ME90 Series (Level VI) <sup>1,2,3,5</sup>			
	12 V @ 7.5 A		2.58 x 5.91 x 1.34 in (65.5 x 150 x 34)	ME90A1251F01
	15 V @ 6 A		2.58 x 5.91 x 1.34 in (65.5 x 150 x 34)	ME90A1503F01
	18 V @ 5 A		2.58 x 5.91 x 1.34 in (65.5 x 150 x 34)	ME90A1803F01
	24 V @ 3.75 A		2.58 x 5.91 x 1.34 in (65.5 x 150 x 34)	ME90A2403F01

### Options

- For input Class I models: For AC GND connected to output common (-), insert a "B" in the part number where the "A" is located (ME60B0903F01).
- "03" in the model number indicates 2.5 x 5.5 x 9.5 mm straight barrel type connector. Other output connector options are available, contact AE sales for details.
- "51" in the 5 V models (ME60A0551F01, TE60A0551F01) indicates 6 pin Molex type output connector.
- "F" in the model number indicates class I desktop C14 receptacle. "N" = class II desktop C8 receptacle (ME60A0903N01). "Q" = class II desktop C18 receptacle (ME60A0903Q01).
- "51" in the 12 V models (ME90A0551F01) indicates 6 pin Molex type output connector.
- "N" in the model number (SLE60SPD96N01) indicates C8 inlet (class II). "B" in the model number (SLE60SPD96B01) indicates class II interchangeable blades (sold separately).
- Power supply is not provided with a line cord or USB-C cable.
- "F" in the model number indicates class I desktop C14 receptacle. "N" = class II desktop C8 receptacle (SLE65S0903N01). C6 (class I) and C18 (class II) inputs are available. Contact our sales representative for details.

External Adapter				
Output Power	Output		Size W x L x H (mm)	Model
	V1	V2		
90 W	TE90 Series (Level VI) <sup>1,2,3,4</sup>			
	12 V @ 7.5 A		2.68 x 6.02 x 1.36 in (68 x 153 x 34.5)	TE90A1251F01
	15 V @ 6 A		2.68 x 6.02 x 1.36 in (68 x 153 x 34.5)	TE90A1503F01
	18 V @ 5 A		2.68 x 6.02 x 1.36 in (68 x 153 x 34.5)	TE90A1803F01
	24 V @ 3.75 A		2.68 x 6.02 x 1.36 in (68 x 153 x 34.5)	TE90A2403F01
90 W	SLE90 Series (Level VI) <sup>2,6</sup>			
	12 V @ 7 A		2.34 x 5.75 x 1.42 in (59.5 x 146 x 36)	SLE90S1203F01
	19 V @ 4.7 A		2.34 x 5.75 x 1.42 in (59.5 x 146 x 36)	SLE90S1903F01
	24 V @ 3.75 A		2.34 x 5.75 x 1.42 in (59.5 x 146 x 36)	SLE90S2403F01
	48 V @ 1.9 A		2.34 x 5.75 x 1.42 in (59.5 x 146 x 36)	SLE90S4803F01
100 W	DP100 Series (Level VI & PoE Isolation)			
	54 V @ 1.85 A		6.14 x 2.56 x 1.46 in (156 x 65 x 37.2)	DP10054P3L
150 W	GE150 Series (Level VI) <sup>5,6</sup>			
	12 V @ 12.1 A		2.83 x 6.85 x 1.5 in (72 x 174 x 38)	GE150A1251F01
	15 V @ 9.67 A		2.83 x 6.85 x 1.5 in (72 x 174 x 38)	GE150A1551F01
	18 V @ 8.06 A		2.83 x 6.85 x 1.5 in (72 x 174 x 38)	GE150A1851F01
	24 V @ 6.25 A		2.83 x 6.85 x 1.5 in (72 x 174 x 38)	GE150A2451F01
	48 V @ 3.13 A		2.83 x 6.85 x 1.5 in (72 x 174 x 38)	GE150A1251F01
150 W	ME150 Series (Level VI) <sup>1,3,4</sup>			
	12 V @ 12.5 A		2.83 x 6.85 x 1.5 in (72 x 174 x 38)	ME150A1251F01
	15 V @ 10 A		2.83 x 6.85 x 1.5 in (72 x 174 x 38)	ME150A1551F01
	18 V @ 8.33 A		2.83 x 6.85 x 1.5 in (72 x 174 x 38)	ME150A1851F01
	24 V @ 6.25 A		2.83 x 6.85 x 1.5 in (72 x 174 x 38)	ME150A2451F01
	48 V @ 3.2 A		2.83 x 6.85 x 1.5 in (72 x 174 x 38)	ME150A1251F01
150 W	TE150 Series (Level VI) <sup>1,3,4</sup>			
	12 V @ 12.5 A		2.83 x 6.85 x 1.5 in (72 x 174 x 38)	TE150A1251F01
	15 V @ 10 A		2.83 x 6.85 x 1.5 in (72 x 174 x 38)	TE150A1551F01
	18 V @ 8.33 A		2.83 x 6.85 x 1.5 in (72 x 174 x 38)	TE150A1851F01
	24 V @ 6.25 A		2.83 x 6.85 x 1.5 in (72 x 174 x 38)	TE150A2451F01
	48 V @ 3.2 A		2.83 x 6.85 x 1.5 in (72 x 174 x 38)	TE150A1251F01

## Options

- 1 For input Class I models: For AC GND connected to output common (-), insert a "B" in the part number where the "A" is located (TE90B1251F01).
- 2 "03" in the model number indicates 2.5 x 5.5 x 9.5 mm straight barrel type connector. Other output connector options are available, contact AE sales for details.
- 3 "51" in the 12 V models (TE90A1251F01) indicates 6 pin Molex type output connector.
- 4 "F" in the model number indicates class I desktop C14 receptacle. "N" = class II desktop C8 receptacle (TE90A1503N01). "Q" = class II desktop C18 receptacle (TE90A1503Q01).
- 5 "51" in the 12 V models (ME90A0551F01) indicates 6 pin Molex type output connector.
- 6 "F" in the model number indicates class I desktop C14 receptacle. "N" = class II desktop C8 receptacle (SLE90S0903F01). C6 (class I) and C18 (class II) inputs are available. Contact our sales representative for details.

## EXTERNAL POWER ADAPTER

External Adapter				
Output Power	Output		Size W x L x H (mm)	Model
	V1	V2		
<b>240 W</b>	<b>ME240 Series (Level VI)<sup>1,2,3</sup></b>			
	12 V @ 16.6 A		4.25 x 8.4 x 1.85 in (108 x 214 x 47)	ME240A1251F01
	24 V @ 10 A		4.25 x 8.4 x 1.85 in (108 x 214 x 47)	ME240A2451F01
	28 V @ 8.6 A		4.25 x 8.4 x 1.85 in (108 x 214 x 47)	ME240A2851F01
	48 V @ 5 A		4.25 x 8.4 x 1.85 in (108 x 214 x 47)	ME240A4851F01
<b>240 W</b>	<b>TE240 Series (Level VI)<sup>1,2,3</sup></b>			
	12 V @ 16.6 A		4.25 x 8.4 x 1.85 in (108 x 214 x 47)	TE240A1251F01
	15 V @ 13.3 A		4.25 x 8.4 x 1.85 in (108 x 214 x 47)	TE240A1551F01
	18 V @ 11.1 A		4.25 x 8.4 x 1.85 in (108 x 214 x 47)	TE240A1851F01
	24 V @ 10 A		4.25 x 8.4 x 1.85 in (108 x 214 x 47)	TE240A2451F01
	28 V @ 8.6 A <sup>4</sup>		4.25 x 8.4 x 1.85 in (108 x 214 x 47)	TE240A1251F01
	48 V @ 5 A		4.25 x 8.4 x 1.85 in (108 x 214 x 47)	TE240A2451F01

### Options

- 1** For input Class I models: For AC GND connected to output common (-), insert a "B" in the part number where the "A" is located (TE240B1251F01).
- 2** "51" in the models (ME240A1251F01) indicates 6 pin Molex type output connector.
- 3** "F" in the model number indicates class I desktop C14 receptacle. "N" = class II desktop C8 receptacle (TE240A1503N01). "Q" = class II desktop C18 receptacle (TE240A1503Q01).
- 4** Consult factory for availability of 28V output model.

# Healthcare AC-DC Power Supplies

Up to 30,000 W

Advanced Energy produces a wide range of AC-DC power supplies certified for use in medical equipment requiring lower safety ground leakage and higher isolation. The power supplies listed below are designed for use in Non-patient critical applications: bio-life science, medical, dental, imaging and laboratory applications such as immunoassay and in-vitro diagnostics machines, ultrasound, and mass analyzers. All of these power supplies are high efficiency switch-mode designs and feature medical safety approval to EN60601-1.

## SPECIAL FEATURES

### All Models Feature

- Industry standard footprints
- Full power to 50°C
- Medical approvals
- Wide-range AC input
- High demonstrated MTBF
- Extensive safety approvals
- Remote sense
- Over-voltage protection
- Derated operation to 70°C
- Adjustable outputs
- Over-load protection
- Built-in EMI filtering
- Power fail

### Many Models Feature

- EN61000-3-2 compliance
- Supervisory outputs (5 V/12 V)
- Wide-adjust floating 4<sup>th</sup> output
- Single wire current share
- Wide-adjust on single output models
- Voltage monitor/data logging
- Real-time parametric adjustment & control

Healthcare AC-DC Power Supplies							
Output Power		Output					
[Forced Air]	Free Air	V1	V2	V3	V4	Size W x L x H (mm)	Model
12 W		GB10 Series <sup>1</sup>					
	5 V @ 2 A					1.6 x 3.4 x 0.98 in (41 x 86 x 25)	GB10S05K01
	7.5 V @ 1.3 A						GB10S07K01
	9 V @ 1 A						GB10S09K01
	12 V @ 1 A						GB10S12K01
	15 V @ 0.8 A						GB10S15K01
	24 V @ 0.5 A						GB10S24K01
20 W		GB20 Series					
	5 V @ 3 A <sup>2</sup>					1.6 x 3.4 x 0.98 in (41 x 86 x 25)	GB20S05K01
	7.5 V @ 2 A <sup>2</sup>						GB20S07K01
	9 V @ 2 A <sup>2</sup>						GB20S09K01
	12 V @ 1.5 A <sup>3</sup>						GB20S12K01
	15 V @ 1.2 A <sup>3</sup>						GB20S15K01
	24 V @ 0.8 A <sup>3</sup>						GB20S24K01
	48 V @ 0.4 A <sup>3</sup>						GB20S48K01
	GB30 Series						
	5 V @ 4 A <sup>2</sup>					1.9 x 4 x 0.9 in (48 x 101.6 x 22.2)	GB30S05K01
	7.5 V @ 3 A <sup>2</sup>						GB30S07K01
	9 V @ 3 A <sup>2</sup>						GB30S09K01
	12 V @ 2.5 A <sup>3</sup>						GB30S12K01
	15 V @ 2 A <sup>3</sup>						GB30S15K01
	18 V @ 1.67 A <sup>3</sup>						GB30S18K01
	24 V @ 1.33 A <sup>3</sup>						GB30S24K01
	48 V @ 0.63 A <sup>3</sup>						GB30S48K01

<sup>1</sup> "K" - class I input, change to "C" for class II input, change to "P" for class II input PCB mount pins.

<sup>2</sup> "K" - class I input, change to "C" for class II input.

<sup>3</sup> Change "K" to "P" for PCB mount pins class I input, change "K" to "V" for PCB mount pins class II input.

## HEALTHCARE AC-DC POWER SUPPLIES

Low Power							
Output Power		Output				Size W x L x H (mm)	Model
[Forced Air]	Free Air	V1	V2	V3	V4		
[40 W]	25 W	NPS20-M Series <sup>3</sup>				2 x 4 x 1 in (50.8 x 101.6 x 25.4)	NPS22-M NPS23-M NPS24-M NPS25-M NPS28-M
		5 V @ 5 A [8 A] <sup>2</sup>					
		12 V @ 2.1 A [3.3 A] <sup>2</sup>					
		15 V @ 1.7 A [2.7 A] <sup>2</sup>					
		24 V @ 1 A [1.8 A] <sup>2</sup>					
[40 W]	40 W	GB40 Series				2 x 4 x 0.9 in (50.8 x 101.6 x 22.3)	GB40S05K01 GB40S09K01 GB40S12K01 GB40S18K01 GB40S24K01 GB40S48K01
		5 V @ 5 A <sup>4</sup>					
		9 V @ 4 A <sup>4</sup>					
		12 V @ 3.4 A <sup>4</sup>					
		18 V @ 2.22 A <sup>5</sup>					
		24 V @ 1.7 A <sup>5</sup>					
[55 W]	45 W	NPT40-M Series <sup>3</sup>				2 x 4 x 1 in (50.8 x 101.6 x 25.4)	NPT42-M NPT43-M NPT44-M
		5 V @ 5 A [8 A]	12 V @ 2.5 A [3 A]	-12 V @ 0.5 A [ 0.7 A]			
		5 V @ 5 A [8 A]	15 V @ 2 A [2.4 A]	-15 V @ 0.5 A [ 0.7 A]			
		5 V @ 5 A [8 A]	24 V @ 1 A [1.5 A]	12 V @ 0.5 A [ 0.7 A]			
[60 W]	45 W	NPS40-M Series <sup>3</sup>				2 x 4 x 1 in (50.8 x 101.6 x 25.4)	NPS42-M NPS43-M NPS44-M NPS45-M NPS48-M
		5 V @ 8 A [11 A] <sup>2</sup>					
		12 V @ 3.75 A [5 A] <sup>2</sup>					
		15 V @ 3 A [4 A] <sup>2</sup>					
		24 V @ 1.9 A [2.5 A] <sup>2</sup>					
		48 V @ 0.94 A [1.25 A] <sup>2</sup>					
[60 W]	60 W	MB60 Series <sup>4</sup>				2 x 3 x 1.06 in (50.8 x 76.2 x 27)	MB60S12K MB60S15K MB60S18K MB60S24K MB60S36K MB60S48K
		12 V @ 4.58 A					
		15 V @ 4 A					
		18 V @ 3.33 A					
		24 V @ 2.5 A					
		36 V @ 1.67 A					
[60 W]	60 W	NPS60-M Series <sup>3</sup>				2 x 4 x 1 in (50.8 x 76.2 x 27)	NPS62-M NPS63-M-006 NPS64-M NPS65-M
		5 V @ 11 A <sup>2</sup>					
		12 V @ 5 A <sup>2</sup> (Level VI Efficiency)					
		15 V @ 4 A <sup>2</sup>					
		24 V @ 2.5 A <sup>2</sup>					
[65 W]	65 W	MB65 Series <sup>4</sup>				2 x 3.5 x 1.3 in (50.8 x 88.9 x 33.1)	MB65S12K MB65S15K MB65S24K MB65S48K
		12 V @ 5.4 A					
		15 V @ 4.3 A					
		24 V @ 2.7 A					
		48 V @ 1.35 A					

<sup>1</sup> Rating with 30 CFM of air

<sup>2</sup> Optional cover/enclosure

<sup>3</sup> Floating output

<sup>4</sup> This product is a component power supply and is only for inclusion by professional installers within other equipment and must not be operated as a standalone product. EMC compliance to appropriate standards must be verified at the system level. This product is for sale to OEMs and system integrators, including through distribution channels. It is not intended for sale to end users.

<sup>4</sup> "K" - class I input, change to "C" for class II input.

<sup>5</sup> Change "K" to "P" for PCB mount pins class I input, change "K" to "V" for PCB mount pins class II input.

Low Power							
Output Power		Output				Size W x L x H (mm)	Model
[Forced Air]	Free Air	V1	V2	V3	V4		
65 W		MINT1065 Series <sup>1</sup>					
	12 V @ 5.25 A					2 x 4 x 1 in (50.8 x 101.6 x 26)	MINT1065X1275C01
	13.2 V @ 4.8 A						MINT1065X1375C01
	15 V @ 4.33 A						MINT1065X1575C01
	18 V @ 3.5 A						MINT1065X1875C01
	20 V @ 3.25 A						MINT1065X2075C01
	24 V @ 2.7 A						MINT1065X2475C01
	48 V @ 1.35 A						MINT1065X4875C01
65 W		SLB65 Series <sup>2</sup>					
	5 V @ 8 A					2 x 3 x 1.08 in (50.8 x 76.2 x 27.55)	SLB65S05x
	12 V @ 5 A						SLB65S12x
	15 V @ 4 A						SLB65S15x
	18 V @ 3.3 A						SLB65S18x
	24 V @ 2.71 A						SLB65S24x
	48 V @ 1.35 A						SLB65S48x
[110 W]	80 W	MINT3110 Series <sup>3</sup>					
	5 V @ 10 A [14 A]	12 V @ 4.5 A [6 A]	-12 V @ 1 A [1 A]			2 x 4 x 1.3 in (50.8 x 101.6 x 33)	MINT3110A0508K01
	5 V @ 10 A [14 A]	15 V @ 3.5 A [4.5 A]	-15 V @ 1 A [1 A]				MINT3110A1708K01
	5 V @ 8 A [12 A]	24 V @ 3 A [4 A]	-24 V @ 1 A [1 A]				MINT3110A1908K01
110 W		MINT1110 Series <sup>4</sup>					
	12 V @ 7.5 A					3 x 5 x 1.27 in (76.2 x 127 x 32.3)	MINT1110A1208K01
	15 V @ 6.5 A						MINT1110A1508K01
	18 V @ 5.8 A						MINT1110A1808K01
	24 V @ 4.6 A						MINT1110A2408K01
[120 W]	100 W	MB120 Series <sup>5</sup>					
	12 V @ 8.3 A [10 A]					2 x 4 x 1.25 in (50.8 x 101.6 x 32)	MB120S12K01
	15 V @ 6.6 A [8 A]						MB120S15K01
	18 V @ 5.5 A [6.6 A]						MB120S18K01
	24 V @ 4.1 A [5 A]						MB120S24K01
[125 W]	85 W	SLB125 Series <sup>2</sup>					
	12 V @ 7.1 A [9.8 A]					2 x 4 x 1.26 in (50.8 x 101.6 x 32)	SLB125S12x
	15 V @ 5.6 A [7.9 A]						SLB125S15x
	18 V @ 4.7 A [6.5 A]						SLB125S18x
	24 V @ 3.6 A [5.2 A]						SLB125S24x
	36 V @ 2.4 A [3.5 A]						SLB125S36x
	48 V @ 1.8 A [2.1 A]						SLB125S48x
	56 V @ 1.5 A [2.2 A]						SLB125S56x

[ ] Rating with 200 LFM of air.

<sup>1</sup> Replace the "x" at the middle of the model number with "A" for class I (grounded) input or replace with "B" for class II (ungrounded) input or "C" with chassis/cover provided (class I only).

<sup>2</sup> Replace the "x" at the end of the model number with "C" for class II (ungrounded) input or replace with "K" for class I (grounded) input.

<sup>3</sup> Medical safety certificate only.

<sup>4</sup> "01" = standard model, "02" and higher indicates a modified model.

<sup>5</sup> "K" - class I input, change to "C" for class II input.

## HEALTHCARE AC-DC POWER SUPPLIES

Low Power							
Output Power		Output				Size W x L x H (mm)	Model
[Forced Air]	Free Air	V1	V2	V3	V4		
[130 W]	100 W	GB130Q Series <sup>1</sup>					
		5 V @ 12 A [16 A]	12 V @ 3 A [4 A]	-12 V @ 1 A [1.2 A]	12 V @ 1 A [1.2 A]	3 x 5 x 1.34 in (76.2 x 127 x 34.1)	GB130QA
		5 V @ 12 A [16 A]	12 V @ 3 A [4 A]	-15 V @ 1 A [1.2 A]	15 V @ 1 A [1.2 A]		GB130QC <sup>2</sup>
		5 V @ 12 A [16 A]	24 V @ 2 A [3 A]	-12 V @ 1 A [1.2 A]	12 V @ 1 A [1.2 A]		GB130QD <sup>2</sup>
		5 V @ 12 A [16 A]	24 V @ 2 A [3 A]	-15 V @ 1 A [1.2 A]	15 V @ 1 A [1.2 A]		GB130QE <sup>2</sup>
		5 V @ 10 A [16 A]	24 V @ 4 A [5 A]	-12 V @ 1 A [1.2 A]	12 V @ 2 A [2 A]		GB130QP
[130 W]	LPT100-M Series						
	3	3.3 V @ [18 A]	5 V @ [9 A]	12 V @ [2.3 A]		2 x 4 x 1.28 in (50.8 x 101.6 x 32.7)	LPT101-M
		5 V @ [18 A]	12 V @ [9 A]	-12 V @ [2 A]			LPT102-M
		5 V @ [18 A]	15 V @ [7.2 A]	-15 V @ [1.5 A]			LPT103-M
		5 V @ [18 A]	24 V @ [3 A]	12 V @ [2.3 A]			LPT104-M
[150 W]	100 W	LPS100-M Series					
		5 V @ 16 A [24 A]				2 x 4 x 1.29 in (50.8 x 101.6 x 33)	LPS102-M
		12 V @ 8.3 A [12.5 A]					LPS103-M
		15 V @ 6.7 A [10 A]					LPS104-M
		24 V @ 4.2 A [6.3 A]					LPS105-M
		48 V @ 2.1 A [3.1 A]					LPS108-M
		54 V @ 1.85 A [2.8 A]					LPS109-M
[150 W]	100 W	TLP150 Series <sup>4</sup>					
	3	12 V @ 8.4 A [12.5 A]				3 x 5 x 1.25 in (76.2 x 127 x 31.75)	TLP150N-99S12J
		24 V @ 4.2 A [6.3 A]					TLP150N-99S24J
[150 W]	100 W	MINT1150 Series					
		12 V @ 8.33 A [12.5 A]				2 x 4 x 1.3 in (50.8 x 101.6 x 33)	MINT1150A1206K01
		15 V @ 6.67 A [10 A]					MINT1150A1506K01
		24 V @ 4.17 A [6.25 A]					MINT1150A2406K01
		48 V @ 2.08 A [3.13 A]					MINT1150A4806K01
		56 V @ 1.79 A [2.68 A]					MINT1150A5606K01
[200 W]	100 W	LPQ200-M Series					
		3.3 V @ 13 A [18 A]	5 V @ 13 A [18 A]	12 V @ 5 A [9 A]	-12 V @ 1 A [2 A]	3 x 5 x 1.3 in (76.2 x 127 x 33.6)	LPQ201-M
		5 V @ 13 A [18 A]	12 V @ 5 A [9 A]	24 V @ 1.5 A [3 A]	-12 V @ 1 A [2 A]		LPQ201-M
[150 W]	120 W	NGB150 Series <sup>5</sup>					
		12 V @ 10 A [12.5 A]				2 x 4 x 1.26 in (50.8 x 101.6 x 32)	NGB150S12K
		15 V @ 8 A [10 A]					NGB150S15K
		19 V @ 6.32 A [7.9 A]					NGB150S19K
		24 V @ 5 A [6.25 A]					NGB150S24K
		36 V @ 3.3 A [4.16 A]					NGB150S36K
		48 V @ 2.5 A [3.13 A]					NGB150S48K

[ ] Rating with 200 LFM of air, 30 CFM of air for LPT100-M, LPS100-M and TLP150.

<sup>1</sup> Add "-C" suffix to the models with optional cover/chassis. Output power derates to 104 W with airflow, 75 W convection cooled.

<sup>2</sup> Contact factory for the availability.

<sup>3</sup> Optional cover/enclosure

<sup>4</sup> Replace "J" at the end of the model number with "FJ" when the optional standby output and/or remote ON/OFF control is required.

<sup>5</sup> "K" - class I input, change to "C" for class II input.

Low Power								
Output Power		Output				Size W x L x H (mm)	Model	
[Forced Air]	Free Air	V1	V2	V3	V4			
180 W	MINT1180 Series							
	12 V @ 15 A					3 x 5 x 1.3 in (76.2 x 127 x 33.6)	MINT1180A1275K01	
	15 V @ 12 A						MINT1180A1575K01	
	18 V @ 10 A						MINT1180A1875K01	
	24 V @ 7.5 A						MINT1180A2475K01	
	28 V @ 6.4 A						MINT1180A2875K01	
	32 V @ 5.62 A						MINT1180A3275K01	
	36 V @ 5 A						MINT1180A3675K01	
	48 V @ 3.75 A						MINT1180A4875K01	
[250 W]	155 W	LPS200-M Series						
	5 V @ 20 A [40 A]					3 x 5 x 1.3 in (76.2 x 127 x 33.6)	LPS202-M	
	12 V @ 10.3 A [20.8 A]						LPS203-M	
	15 V @ 8.3 A [16.6 A]						LPS204-M	
	24 V @ 5.2 A [10.4 A]						LPS205-M	
	48 V @ 2.6 A [5.2 A]						LPS208-M	
[250 W]	155 W	CPS250-M Series						
	12 V @ 12.92 A [20.83 A]					2 x 4 x 1.3 in (50.8 x 101.6 x 32.8)	CPS253-M	
	24 V @ 6.45 A [10.42 A]						CPS255-M	
	48 V @ 3.23 A [5.21 A]						CPS258-M	
[250 W]	175 W	NGB250 Series						
	12 V @ 12.1 A [19.1 A]					2 x 4 x 1.5 in (50.8 x 101.6 x 38.1)00	NGB250S12K	
	15 V @ 10.3 A [15.3 A]						NGB250S15K	
	24 V @ 7.3 A [10.4 A]						NGB250S24K	
	28 V @ 6.2 A [8.9 A]						NGB250S28K	
	48 V @ 3.6 A [5.2 A]						NGB250S48K	
	56 V @ 3.1 A [4.47 A]						NGB250S56K	
[275 W]	180 W	MINT1275 Series						
	12 V @ 15 A [21.8 A]					3 x 5 x 1.4 in (76.2 x 127 x 33.6)	MINT1275A1214K01	
	15 V @ 12 A [18.3 A]						MINT1275A1514K01	
	24 V @ 7.5 A [10.9 A]						MINT1275A2414K01	
	48 V @ 3.75 A [5.46 A]						MINT1275A4814K01	
	56 V @ 3.21 A [4.68 A]						MINT1275A5614K01	
[300 W]	190 W	SLB300 Series						
	12 V @ 15.4 A [22.5 A]					3 x 5 x 1.22 in (76.2 x 127 x 31.1)	SLB300S12x	
	15 V @ 12.7 A [20 A]						SLB300S15x	
	18 V @ 10.6 A [16.7 A]						SLB300S18x	
	24 V @ 7.9 A [12.5 A]						SLB300S24x	
	36 V @ 5.3 A [8.3 A]						SLB300S36x	
	48 V @ 4 A [6.3 A]						SLB300S48x	
	56 V @ 3.4 A [5.4 A]						SLB300S56x	

[ ] Rating with 200 LFM of air, 30 CFM of air for LPQ200-M, LPS200-M and CPS250-M.

## HEALTHCARE AC-DC POWER SUPPLIES

Low Power							
Output Power		Output				Size W x L x H (mm)	Model
[Forced Air]	Free Air	V1	V2	V3	V4		
[300 W]	200 W	GU300 Series <sup>1</sup>					
		12 V @ 15.5 A [23.5 A]				3 x 5 x 1.22 in (76.2 x 127 x 31.1)	GU300S12K
		15 V @ 12.3 A [19 A]					GU300S15K
		18 V @ 10.2 A [15.7 A]					GU300S18K
		24 V @ 7.7 A [11.8 A]					GU300S24K
		48 V @ 3.8 A [5.9 A]					GU300S48K
		56 V @ 3.3 A [5 A]					GU300S56K
[360 W]	240 W	LPS360-M Series					
		12 V @ 20 A [30 A]				3 x 5 x 1.3 in (76.2 x 127 x 33)	LPS363-M
		15 V @ 16 A [24 A]					LPS364-M
		24 V @ 10 A [15 A]					LPS365-M
		36 V @ 6.25 A [11.25 A]					LPS366-M
		48 V @ 5 A [7.5 A]					LPS368-M
[425 W]	270 W	NGB425 Series <sup>1</sup>					
		12 V @ 19.5 A [30 A]				3 x 5 x 1.5 in (76.2 x 127 x 38.1)	NGB425S12K
		15 V @ 13.2 A [24 A]					NGB425S15K
		24 V @ 11.2 A [17.5 A]					NGB425S24K
		48 V @ 5.6 A [8.75 A]					NGB425S48K
[650 W]	400 W	CNS650 Series					
		12 V @ 54.2 A				4 x 7 x 1.6 in (101.6 x 177.8 x 40.6)	CNS653-ME
		12 V @ 54.2 A [30.8 A]					CNS653-MF
		12 V @ 54.2 A [33.3 A]					CNS653-MU
		24 V @ 27.1 A [16.7 A]					CNS655-MU
		48 V @ 13.5 A [8.3 A]					CNS658-MU
[660 W]	440 W	NGB660 Series <sup>1</sup>					
		12 V @ 30.6 A [46.2 A]				4 x 6 x 1.55 in (101.6 x 152.4 x 39.4)	NGB660S12K
		15 V @ 24.5 A [37 A]					NGB660S15K
		24 V @ 18.2 A [27.2 A]					NGB660S24K
		48 V @ 9.1 A [13.6 A]					NGB660S48K
[800 W]	550 W	NGB800 Series					
		12 V @ 39 A [57.5 A]				5 x 8 x 1.6 in (127 x 203.2 x 40.6)	NGB800S12K
		15 V @ 26.7 A [46 A]					NGB800S15K
		24 V @ 22.9 A [33.3 A]					NGB800S24K
		48 V @ 11.4 A [16.7 A]					NGB800S48K

[ ] Rating with 200 LFM of air, 100 LFM for SLB300, 30 CFM for LPS360-M.

<sup>1</sup> "K" - class I input, change to "C" for class II input.

Low Power							
Output Power		Output				Size W x L x H (mm)	Model
[Forced Air]	Free Air	V1	V2	V3	V4		
[1000 W]	800 W	SLB1000 Series					
		12 V @ 66.6 A [84 A]				5.2 x 10 x 2.4 in (132 x 254 x 61.7)	SLB1000S12K
		24 V @ 33.3 A [42 A]					SLB1000S24K
		48 V @ 16.6 A [21 A]					SLB1000S48K
[1200 W]	NGB1200 Series						
		12 V @ [100 A]				5 x 8 x 1.6 in (127 x 203.2 x 40.6)	NGB1200S12K
		24 V @ [50 A]					NGB1200S24K
		48 V @ [25 A]					NGB1200S48K
[150 W]	120 W	NCF150 Series <sup>1</sup>					
		12 V @ 10 A [12.5 A]				2 x 4 x 1.26 in (50.8 x 101.6 x 32)	NCF150S12K
		15 V @ 8 A [10 A]					NCF150S15K
		19 V @ 6.32 A [7.9 A]					NCF150S19K
		24 V @ 5 A [6.25 A]					NCF150S24K
		48 V @ 2.5 A [3.13 A]					NCF150S48K
[250 W]	175 W	NCF250 Series <sup>1</sup>					
		12 V @ 12.1 A [19.1 A]				2.4 x 5 x 1.6 in (60.96 x 127 x 40.6)	NCF250S12K
		24 V @ 7.3 A [10.4 A]					NCF250S24K
		48 V @ 3.6 A [5.2 A]					NCF250S48K
[425 W]	275 W	NCF425 Series <sup>1</sup>					
		12 V @ 19.58 A [30 A]				3.5 x 6 x 1.5 in (88.9 x 152.4 x 38.1)	NCF425S12K
		24 V @ 11.25 A [17.5 A]					NCF425S24K
		48 V @ 5.63 A [8.75 A]					NCF425S48K
[660 W]	440 W	NCF660 Series <sup>1</sup>					
		12 V @ 30.6 A [46.2 A]				4 x 7 x 1.6 in (101.6 x 177.8 x 38.1)	NCF660S12K
		24 V @ 18.2 A [27.2 A]					NCF660S24K
		48 V @ 9.1 A [13.6 A]					NCF660S48K
[250 W]	250 W	LCC250 Series					
		12 V @ 20.8 A				4 x 7 x 1.1 in (101.6 x 177.8 x 28)	See LCC250 section
		24 V @ 10.4 A					
		48 V @ 5.2 A					
[600 W]	600 W	LCC600 Series					
		12 V @ 50.0 A				4 x 9 x 1.57 in (101.6 x 228.6 x 40)	See LCC600 section
		28 V @ 21.4 A					
		36 V @ 16.7 A					
		48 V @ 12.5 A					
[300 W]	LCM300 Bulk Front End						
		12 to 60 V	Single outputs			1.61 x 4.0 x 7.0 in (4.09 x 101.6 x 177.8)	See LCM300 section

<sup>1</sup> CF application models. Contact Advanced Energy for availability of other output voltages.

## HEALTHCARE AC-DC POWER SUPPLIES

Healthcare AC-DC Power Supplies						
Output Power	Output				Size W x L x H (mm)	Model
[Forced Air]	Free Air	V1	V2	V3	V4	
[600 W]	600 W	CoolX600 Series				
			5, 12 V	8 outputs	Fully Configurable	8.5 in x 4.5 in x 1U (215.9 x 114.3 x 39.1) See CoolX600 section
[600 W]	LCM600 Bulk Front End					
		12 to 60 V	Single outputs		4.5 x 7.5 x 2.4 in (114.3 x 190.5 x 62)	See LCM600 section
[1000 W]	LCM1000 Bulk Front End					
		12 to 52.8 V	Single outputs		2.5 x 5.2 x 10.0 in (63.5 x 132.1 x 254)	See LCM1000 section
[1000 W]	CoolX1000 Series					
		1 to 58 V	12 outputs	Fully Configurable	10 in x 6.5 in x 1U (259.5 x 164 x 41)	See CoolX1000 section
[1000 W]	CS1000 Series					
		24, 48 V	Single output		10 in x 6.5 in x 1U (259.5 x 164 x 41)	See CS1000 section
[Up to 1200 W]	UltiMod Series					
		1 to 58 V	12 outputs	Fully Configurable	UX4: 10 in x 10.3 in x 1U (260 x 89 x 41) UX6: 10 in x 5 in x 1U (260 x 127 x 41)	See UltiMod section
[1500 W]	LCM1500 Bulk Front End					
		12 to 52.8 V	Single outputs		2.5 x 5.2 x 10.0 in (63.5 x 132.1 x 254)	See LCM1500 section
[3000 W]	LCM3000 Bulk Front End					
		12 to 48 V	Single outputs		2.5 x 7.0 x 10.9 in	See LCM3000 section
Up to 1500 W	Intelligent MP Series					
		2 to 60 V	1 to 21 outputs	Fully configurable and intelligent	iMP4: 2.5 x 5 x 10 in (63.5 x 127 x 254) 5 slots iMP8: 2.5 x 7 x 10 in (63.5 x 177.8 x 254) 6 slots iMP1: 2.5 x 7 x 11 in (63.5 x 203.2 x 279.4) 7 slots	See iMP section

Healthcare AC-DC Power Supplies						
Output Power		Output			Size W x L x H (mm)	Model
[Forced Air]	Free Air	V1	V2	V3	V4	
[1800 W]		CoolX1800 Series				
		1 to 58 V	12 outputs	Fully Configurable		10.5 in x 5 in x 1U (262 x 127 x 41) See CoolX1800 section
[3000 W]		CoolX3000 Series				
		1 to 205 V	24 outputs	Fully Configurable		12.8 x 5.2 x 4.7 in (325 x 131 x 120) See CoolX3000 section
[4000 W]		FlexiCharge Series				
		1 to 1 kV	1 high voltage, 1 to 10 low voltage outputs	Configurable		FC15M: 12.68 x 5.7 x 4.17 in (322 x 144.9 x 105.9) FC25M: 12.68 x 5.7 x 4.17 in (322 x 144.9 x 105.9) FC40M: 13.7 x 6.02 x 5.09 in (348 x 153 x 129.4) See FlexiCharge section
Up to 1800 W		Micro MP Series				
		1.8 to 60 V	1 to 12 outputs	Fully Configurable		04/09: 1.57 x 3.5 x 10.0 in, 4 Slots 10/16: 1.57 x 5.0 x 10.0 in, 6 Slots See μMP section
Up to 4000 W		NeoPower Series				
		1 to 57.6 V	1 to 8 outputs	Fully configurable and intelligent		NP05: 2.5 x 5 x 11 in (63.5 x 127 x 283.4 mm) 5 slots NP08: 2.5 x 8 x 11 in (63.5 x 203.2 x 283.4 mm) 8 slots See NeoPower section
1500 to 4920 W		Intelligent VS Series				
		2 to 60 V	1 to 42 outputs	Fully configurable and intelligent		iVS1/6: 5 x 5 x 11 in (127 x 127 x 179.4 mm) 9 slots iVS3/8/8H: 5 x 8 x 11 in (127 x 203.2 x 179.4 mm) 14 slots See iVS section
Up to 30000 W		Precision High Power System				
		0.12 to 300 V	Up to 8 outputs	Fully configurable and intelligent		5.22 x 19 x 27.9 in (132.5 x 482.6 x 708.3) See iHP Section



#### Total Power

- UX4 600 W
- UX6 1200 W

#### Slots

- 4, 6

#### Safety

#### Medical

- UL/EN60601-1 3rd edition
- UL/EN60601-1-2 4th edition (EMC)

#### Industrial

- UL/EN60950 2nd edition
- IEC62368 2nd edition

## UltiMod Series

**Unique in Flexibility, Unrivalled in Performance,  
Ultra-cost Competitive**

### SPECIAL FEATURES

- Highest efficiency — up to 91%
- User and field configurable
- Standard medical features
- Leakage current < 300  $\mu$ A (< 150  $\mu$ A optional)
- 2 MOPP
- 4 kV Isolation
- Lowest acoustic Noise
- -40°C start-up temperature
- Extra ruggedized optional
- Vibration: MIL-STD-810G
- No minimum load
- Extra-low profile < 1U height
- All outputs fully floating
- Series/parallel of multiple outputs
- 5 V isolated standby voltage
- Active PFC (Power Factor Correction)
- Product options: Conformal coating, low leakage current, connector, cabling and mounting options, and reverse fans additional ruggedization

### TYPICAL APPLICATIONS

#### Medical

- Clinical diagnostic and dialysis equipment, medical lasers, radiological imaging, clinical chemistry

#### Industrial

- Test and measurement, industrial machines, automation and audio equipment, printing, telecommunications

Ordering Information							
Model	Vnom (V)	Set Point Adjust Range	Dynamic Vtrim Range (V)	I <sub>max</sub> (A)	Power (W)	Remote Sense	Power Good
XgA	12.0	10.8 to 15.6	—	12.5	150	—	—
XgB	24.0	19.2 to 26.4	—	8.3	200	—	—
XgC	36.0	28.8 to 39.6	—	5.6	200	—	—
XgD	48.0	38.5 to 50.4	—	4.2	200	—	—
XgE/Xg7	24.0	5.0 to 28.0	—	5.0	120	—	—
XgF/Xg8 (v1)	24.0	5.0 to 28.0	—	3.0	72	—	Yes
	(v2)	5.0 to 28.0	—	3.0	72	—	Yes
XgG	2.5	1.5 to 3.6	1.15 to 3.6	40.0	100	Yes	Yes
XgH	5.0	3.2 to 6.0	1.5 to 6.0	36.0	180	Yes	Yes
XgJ	12.0	6.0 to 15.0	4.0 to 15.0	18.3	220	Yes	Yes
XgK	24.0	12.0 to 30.0	8.0 to 30.0	9.2	220	Yes	Yes
XgL	48.0	28.0 to 58.0	8.0 to 58.0	5.0	240	Yes	Yes
Xg1	2.5	1.5 to 3.6	1.15 to 3.6	50.0	125	Yes	Yes
Xg2	5.0	3.2 to 6.0	1.5 to 6.0	40.0	200	Yes	Yes
Xg3	12.0	6.0 to 15.0	4.0 to 15.0	20.0	240	Yes	Yes
Xg4	24.0	12.0 to 30.0	8.0 to 30.0	10.0	240	Yes	Yes
Xg5	48.0	28.0 to 58.0	8.0 to 58.0	6.0	288	Yes	Yes
XgM	5.0	3.2 to 6.0	1.0 to 6.0	40.0	200	Yes	Yes
XgN	12.0	6.0 to 15.0	1.0 to 15.0	20.0	240	Yes	Yes
XgP	24.0	12.0 to 30.0	1.0 to 30.0 <sup>1</sup>	10.0	240	Yes	Yes
XgQ	48.0	24.0 to 58.0	1.0 to 58.0 <sup>2</sup>	6.0	288	Yes	Yes
XgR	24.0	12.0 to 30.0	8.0 to 30.0	10.0	240	—	Yes
XgT	48.0	28.0 to 58.0	8.0 to 58.0	6.0	288	—	Yes

Environmental Specifications						
Parameter	Conditions/Description	Min	NOM	Max	Units	
Operating Temperature	Operates to specification below -20°C after 10 min warm-up	-40	—	70	°C	
Storage Temperature		-40	—	85	°C	
Derating	See derating curves	—	—	—	—	
Relative Humidity	Non-condensing	5	—	95	% RH	
Acoustic Noise	Measured from distance of 1 m	—	39.8/42.7	—	dBA	
Shock		60	—	—	G	
Vibration	MIL-STD 810G	—	—	—	—	
Altitude	Operational: 2000 m, Storage: 8000 m	—	—	—	—	

<sup>1</sup> SEMI F47 compliant at input voltages > 160 VAC. Consult Advanced Energy for details.

<sup>2</sup> Visit [www.advancedenergy.com](http://www.advancedenergy.com) for configuration, ordering and contact information.



#### Total Power

Up to 1500 W

#### Input Voltage

- 85 to 264 VAC
- 120 to 300 VDC

#### # of Outputs

Up to 21

#### Safety

- UL UL60950/UL2601
- CSA CSA22.2 No. 234 Level 5
- VDE EN60950/EN60601-1
- BABT Compliance to EN60950/  
EN60601 BS7002
- CB Certificate and report
- CE Mark to LVD

## Intelligent MP Series

Intelligent Modular Power Supply for Optimum Flexibility  
Up to 1500 W

### SPECIAL FEATURES

- Medical EN60601-1 approval
- Intelligent I<sup>2</sup>C control
- Voltage adjustment on all outputs (Manual or I<sup>2</sup>C)
- Configurable input and output (case and module) OK signals and indicators
- Configurable inhibit/enable
- Configurable output UP/DOWN sequencing
- Configurable current limit (foldback or constant current)
- High power density (8.8 W/in<sup>3</sup>)
- Intelligent fan (speed control/fault status)
- Downloadable GUI from website
- Customer provided air option
- µP controlled PFC input with active inrush protection
- I<sup>2</sup>C monitor of voltage, current and temp
- Programmable voltage, current limit, inhibit/enable through I<sup>2</sup>C
- Optional extended hold-up module (SEMI F47 compliance)
- CAN BUS and RS-485 interface option
- Low leakage (< 300 µA)
- Increased power density to 50% over standard MP
- Backward compatibility with standard MP
- External switching frequency sync input
- Optional conformal coating
- Industrial temp range (-40 to 70°C)
- No preload required
- Industrial shock/vibration (> 50 Gs)

### Electrical Specifications

#### Input

Input Range	85 to 264 VAC 120 to 350 VDC (limited to 300 VDC in medical applications)
Frequency	47 to 63 Hz (iMP1 47 to 440 Hz)
Inrush Current	40 A peak max (soft start)
Efficiency	Up to 85% @ full case load
Power Factor	0.99 typ meets EN61000-3-2 (n/a @ 440 Hz)
Turn-on Time	AC on 2 sec typ, inhibit/enable 150 ms typical Programmable delay; 50 ms internal turn-on delay (Dual Output only)
EMI Filter	CISPR 22/EN55022 Level "B"
Leakage Current	300 µA max @ 240 VAC; 47 to 63 Hz
Radiated EMI	CISPR 22/EN55022 Level "B"
Holdover Storage	20 ms min (independent of input VAC) additional 34 ms holdover storage with optional HUP module (SEMI F47 compatible)
AC OK	> 5 ms early warning min before outputs lose regulation Full cycle ride thru (50 Hz) (N/A on iMP4 > 750 W @ 90 VAC)
Harmonic Distortion	Meets EN61000-3-2


## Electrical Specifications (Continued)

Input	
Isolation	Meets EN60950 and EN60601 Input to output, input to ground: 2000 VAC; output to ground: 400 VDC Meets 1 MOPP Primary to ground, 2 MOPP Primary to Secondary
Global Inhibit/Enable	TTL, Logic "1" and Logic "0"; configurable
Input Fuse (internal)	iMP4: 16 A; iMP8: 20 A; iMP1: 25 A (both lines fused)
Warranty	Three years
Output	
Adjustment Range <sup>1</sup>	±10% minimum all outputs (manual) (full module adjustment range using I <sup>2</sup> C)
Margining	±4-6% nominal analog (single output module only)
Overall Regulation	0.4% or 20 mV max (1500 W modules 1% max 36 W modules 4% max)
Ripple	RMS: 0.1% or 10 mV, whichever is greater P <sub>k</sub> -P <sub>k</sub> : 1.0% or 50 mV, whichever is greater Bandwidth limited to 20 MHz
Dynamic Response	< 2% or 100 mV, with 25% load step
Recovery Time	To within 1% in < 300 µs
Over-current Protection <sup>2</sup>	Configurable through I <sup>2</sup> C (calibration required). Single output module and main output of the dual output module 105 to 120% of rated output current. Aux output of dual output module 105 to 140% of rated output current
Short-circuit Protection	Protected for continuous short-circuit Recovery is automatic upon removal of short
Over-voltage Protection <sup>1</sup>	Configurable through I <sup>2</sup> C
- Single Output Module	2 to 5.5 V 122 to 134%; 6 to 60 V 110 to 120%
- Dual Output Module	2 to 6 V 122 to 134%; 8 to 28 V 110 to 120%
Reverse Voltage Protection	100% of rated output current
Thermal Protection <sup>1</sup> (OTP and OTW)	Configurable through I <sup>2</sup> C All outputs disabled when internal temp exceeds safe operating range. > 5 ms warning (AC OK signal) before shutdown
Remote Sense	Up to 0.5 V total drop (Not available on triple output module)
Single Wire Parallel	Current share to within 2% of total rated current
DC OK <sup>1</sup>	±5% of Nominal. Configurable through I <sup>2</sup> C
Minimum Load	Not required
Housekeeping Standby	5 VDC @ 1.0 A max present whenever AC input is applied (Optional 2.0 A available)
Module Inhibit <sup>1</sup>	Configured and controlled through I <sup>2</sup> C
Switching Frequency	250 kHz accepts external sync signal
Output/Output Isolation	> 1 Megohm, 500 V

<sup>1</sup> Can be controlled via I<sup>2</sup>C<sup>2</sup> Controlled via I<sup>2</sup>C but requires load calibration

## Environmental Specifications

Operating Temperature	-40 to 70°C ambient. Derate each output 2.5% per degree from 50 to 70°C. (-20°C start-up)
Storage Temperature	-40 to 85°C
Electromagnetic Susceptibility	Designed to meet EN61000-4; -2, -3, -4, -5, -6, -8, -11 Level 3
Humidity	Operating; Non-condensing 10% to 95% RH
Vibration	IEC68-2-6 to the levels of IEC721-3-2
MTBF Demonstrated	> 550,000 hours at full load, 220 VAC and 25°C ambient conditions

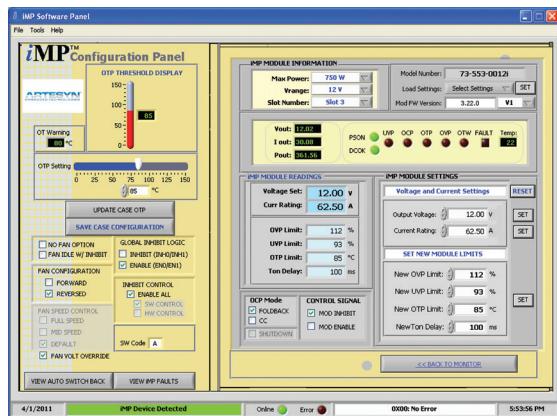

The iMP software is designed to make the iMP Power Supply Unit (PSU) accessible to the user. It is intended to provide information gathered from the PSU and interactive controls to the basic capabilities of iMP power supply.

## INTELLIGENT MEDIUM POWER

Output Module Line-up						
Module Code	1	2	3	5	4	Triple
Module Type	Single	Single	Single	Single	Dual	
Max Output Power	210 W	360 W	750 W	1500 W	144 W	36 W
Max Output Current	35 A	60 A	150 A	300 A	10 A	2 A
Output Voltages Available <sup>1</sup>	2 to 60 V	2 to 28 V	2 to 28 V			
Standard Voltage Increments	25	25	25	18	16	18
Remote Sense	Yes	Yes	Yes	Yes	Yes	No
Remote Margin <sup>1</sup>	Yes	Yes	Yes	Yes	No	No
V-Program - I <sup>2</sup> C Control <sup>1</sup>	Yes	Yes	Yes	Yes	Yes	No
Active Current Share	Yes	Yes	Yes	Yes	Yes	No
Module Inhibit - I <sup>2</sup> C Control <sup>1</sup>	Yes	Yes	Yes	Yes	Yes	Yes
Module Inhibit - Analog	Yes	Yes	Yes	Yes	No	No
Over-voltage/Over-current Protection <sup>1</sup>	Yes	Yes	Yes	Yes	Yes	Yes
Minimum Load Required	No	No	No	No	No	No
Slots Occupied in any iMP Case	1	2	3	4	1	1

### Output Module Voltage/Current

Voltage	Voltage Code	Single Output Module Code				Dual Output <sup>3</sup>		Triple Output		I <sup>2</sup> C Adjustment Ranges <sup>4</sup>
		1	2	3	5 <sup>5</sup>	V1	V2	—	—	
2 V	A	35 A	60 A	150 A	300 A	10 A	10 A	—	—	2 A 1.8 to 2.2
2.2 V	B	35 A	60 A	150 A	300 A	10 A	10 A	—	—	2 A 2.0 to 2.4
3 V	C	35 A	60 A	150 A	300 A	10 A	10 A	—	—	2 A 2.7 to 3.3
3.3 V	D	35 A	60 A	150 A	300 A	10 A	10 A	—	—	2 A 3.0 to 3.6
5 V	E	35 A	60 A	150 A	300 A	10 A	10 A	—	—	2 A 4.5 to 5.5
5.2 V	F	35 A	60 A	144 A	288 A	10 A	10 A	—	—	2 A 4.7 to 5.7
5.5 V	G	34 A	58 A	136 A	273 A	10 A	10 A	—	—	2 A 5.0 to 6.1
6 V	H	23 A	42 A	97.5 A	250 A	10 A <sup>2</sup>	10 A <sup>2</sup>	—	—	2 A 5.4 to 6.6
8 V	I	20 A	36 A	84.4 A	140 A	10 A	4 A	1 A	1 A	1 A 7.2 to 8.8
10 V	J	18 A	32 A	75 A	140 A	10 A	4 A	1 A	1 A	1 A 9.0 to 11.0
11 V	K	17 A	31 A	68 A	136.3 A	10 A	4 A	1 A	1 A	1 A 9.9 to 12.1
12 V	L	17 A	30 A	62.5 A	125 A	10 A	4 A	1 A	1 A	1 A 10.8 to 13.2
14 V	M	14 A	21 A	53.5 A	107 A	9 A	4 A	1 A	1 A	1 A 12.6 to 15.4
15 V	N	14 A	20 A	50 A	100 A	8 A	4 A	1 A	1 A	1 A 13.5 to 16.5
18 V	O	11 A	19 A	41.6 A	83.3 A	—	—	—	0.5 A	0.5 A 16.2 to 19.8
20 V	P	10.5 A	18 A	37.5 A	75 A	—	—	—	0.5 A	0.5 A 18.0 to 22.0
24 V	Q	8.5 A	15 A	30 A	62.5 A	4 A	2 A	—	0.5 A	0.5 A 21.6 to 26.4
28 V	R	6.7 A	11 A	26.8 A	53.5 A	3 A	2 A	—	0.5 A	0.5 A 25.2 to 30.8
30 V	S	6.5 A	11 A	25 A	50 A	—	—	—	—	— 27.0 to 33.0
33 V	T	6.2 A	10.9 A	22.7 A	35.8 A	—	—	—	—	— 29.7 to 36.3
36 V	U	5.8 A	10 A	20.8 A	35.8 A	—	—	—	—	— 32.4 to 39.6
42 V	V	4.2 A	7.5 A	16 A	35.7 A	—	—	—	—	— 37.8 to 46.2
48 V	W	4 A	7.5 A	15.6 A	31.2 A	—	—	—	—	— 43.2 to 52.8
54 V	X	3.7 A	6 A	13.9 A	27.7 A	—	—	—	—	— 48.6 to 59.4
60 V	Y	3.5 A	6 A	12.5 A	25 A	—	—	—	—	— 54.0 to 66.0

### Consult Factory

Special	Z	35 A	60 A	150 A	—	—	10 A	—	—	2.3 to 2.6
Special	Z	35 A	60 A	150 A	—	—	10 A	—	—	3.7 to 4.4
Special	Z	20 A	36 A	80 A	140 A	—	8 A	—	—	6.7 to 7.1

<sup>1</sup> Programmable

<sup>2</sup> Contact factory for extended range down to 6 V

<sup>3</sup> Total output power on dual module must Not exceed 144 W

<sup>4</sup> For single output modules only

<sup>5</sup> Applicable for iMP1 only

### Parallel Codes

Slot 7	Slot 6	Slot 5	Slot 4	Slot 3	Slot 2	Slot 1	iMP4 available slots
Slot 7	Slot 6	Slot 5	Slot 4	Slot 3	Slot 2	Slot 1	iMP8 available slots
Slot 7	Slot 6	Slot 5	Slot 4	Slot 3	Slot 2	Slot 1	iMP1 available slots
7	6	5	4	3	2	1	0 = No parallel
●	●	●	●	●	●	●	1 = 1 & 2
●	●	●	●	●	●	●	2 = 2 & 3
●	●	●	●	●	●	●	3 = 3 & 4
●	●	●	●	●	●	●	4 = 4 & 5
●	●	●	●	●	●	●	5 = 3 & 4 & 5
●	●	●	●	●	●	●	6 = 5 & 6
●	●	●	●	●	●	●	7 = 4 & 5 & 6
●	●	●	●	●	●	●	8 = 6 & 7
●	●	●	●	●	●	●	9 = 3 & 4, 6 & 7
●	●	●	●	●	●	●	A = 1 & 2, 3 & 4, 5 & 6
●	●	●	●	●	●	●	C = 2 & 3, 4 & 5
●	●	●	●	●	●	●	E = 4 & 5, 5 & 6

Increments of current Not shown can be achieved by paralleling modules (add currents of each module selected).

## ORDERING INFORMATION

Sample below is 1500 W case with 12 V @ 62.5 A; 5 V @ 60 A; 24 V @ 8.5 A; 12 V @ 10 A; 12 V @ 4 A; with No options.

Case Size	Module/Voltage/Option Codes	Case Option Codes	Software Code	Hardware Code
<b>iMP1<sup>1</sup></b>	<p><b>3L0 - 2E2 - 1Q1 - 4LL0</b></p> <p><b>Case Size (mm)</b> 4 = 2.5" x 5" x 10"; 750 to 1100 W, 5 slots (63.5 x 127 x 254) 8 = 2.5" x 7" x 10"; 1000 to 1200 W, 6 slots (63.5 x 177.8 x 254) 1 = 2.5" x 8" x 11"; 1200 to 1500 W, 7 slots (63.5 x 203.2 x 279.4)</p> <p>1: Add "E" after iMP4 to denote IEC input option. e.g., IMP4E (Not available on iMP8 or iMP1)</p> <p><b>Module Codes</b> Module/voltage/option codes Module codes: (None) = 36 W triple O/P (1 slot) 1 = 210 W single O/P (1 slot) 2 = 360 W single O/P (2 slot) 3 = 750 W single O/P (3 slot) 4 = 144 W dual O/P (1 slot) 5 = 1500 W single O/P (4 slot) 6 - 9 = Future</p> <p><b>Voltage Codes</b> See Output Module Voltage/Current table above</p> <p><b>Option Codes</b> 0 = Standard 1 = Module enable 2 = Constant current 3 = 1 &amp; 2 combined 4 = Set for use in standard (Non-intelligent case) 5 = Shutdown mode for 1500 W 6 = 1 &amp; 5 combined 7 - 9 = Future</p>	<b>00</b>	<b>A</b>	<b>###</b>

**Ordering Note:**

1. USB to I<sup>2</sup>C module order code 73-769-001 or -002



#### Total Power

Up to 1800 W

#### Input Voltage

- 85 to 264 VAC
- 120 to 300 VDC

#### # of Outputs

Up to 12

#### Safety

- UL UL/CSA 62368/ES60601-1
- CSA CSA22.2 No. 234 Level 5
- VDE EN62368/EN60601-1
- CB Certificate and report
- CE Mark to LVD
- CQC Approved

## MicroMP Series

Cost-efficient, Configurable Power Supply with

Market-leading Density and Efficiency

Up to 1800 W with New Product Enhancements

#### SPECIAL FEATURES

- Optional conformal coating
- Industrial temp range (-40 to 70°C)
- Industrial shock/vibration (> 50 G's)
- Low cost
- Standard medical leakage (< 400 µA) with optional low leakage (< 100 µA)
- New 1000 W modules
- PMBus™
- High efficiency
- Low profile 1U size
- Multi output
- Current limit - constant current foldback (optional)
- Low acoustic noise
- High power density
  - uMP04: 10.8 W/in³
  - uMP09: 18.0 W/in³
  - uMP10: 15.1 W/in³
  - uMP16: 22.9 W/in³
- Intelligent fan (speed control/fault status)
- Downloadable GUI from website
- µP controlled PFC input with active inrush protection
- No preload required
- IEC, terminal block, or barrier strip input option



Electrical Specifications	
Input	
Input Range	85 to 264 VAC 120 to 350 VDC (limited to 300 VDC in medical apps)
Frequency	47 to 440 Hz
Inrush Current	40 A peak max (soft start)
Efficiency	Up to 91% @ full case load
Power Factor	0.99 typ meets EN61000-3-2 (n/a @ 440 Hz)
Turn-on Time	AC on 2 sec for $\mu$ MP10/16 and 1.5 sec for $\mu$ MP04, inhibit/enable 250 ms typical
EMI Filter	CISPR 22/EN55022 Level "B"
Leakage Current	< 200 $\mu$ A using center-tapped xfmr measurement method. (< 400 $\mu$ A @ 264 VAC input)
Radiated EMI	CISPR 22/EN55022 Level "B"
Warranty	Two years
Output	
Factory Set Point Accuracy	$\pm$ 1%
Margining or Optional V Program	$\pm$ 3-7% Nominal analog (single output module only)
Overall Regulation	0.4% or 30 mV which ever is greater
Ripple	RMS: 0.1% or 10 mV, whichever is greater Pk-Pk: 1.0% or 50 mV, whichever is greater Bandwidth limited to 20 MHz
Dynamic Response	< $\pm$ 5% or 250 mV, with 50% step load
Recovery Time	To within 1% in < 300 $\mu$ s
Reverse Voltage Protection	100% of rated output current
Thermal Protection (OTP)	All outputs disabled when internal temp exceeds safe operating range.
Remote Sense	Up to 0.5 V total drop (Not available on triple output module)
Single Wire Parallel	Current share to within 5% of total rated current
DC OK	$\pm$ 5% of Nominal
Minimum Load	Not required; signal is open collector
Housekeeping Standby	5 VDC @ 2.0 A max present whenever AC input is applied
Module Inhibit	Logic - output on with low or open. Different logic options available
Output/Output Isolation	> 1 Megohm, 500 V

Environmental Specifications	
Operating Temperature	-40 to 70°C ambient. Derate each output 2.5% per degree from 50 to 70°C. (-20°C start-up) Meets full spec after 1/2 load. 10 min warm-up
Storage Temp	-40 to 85°C
Electromagnetic Susceptibility	Designed to meet EN61000-4; -3, -6, -11 Level 3, Level 4 for -2, -4, -5
Humidity	Operating; Non-condensing 10 to 95% RH
Vibration	MIL-STD-810E
MTBF Demonstrated	> 350,000 hours at full load, one $\mu$ MP04 case + two modules, Telcordia SR-332 calculated MTBF
Altitude:	Up to 10k ft; derate linear to 50% from 10 to 30k ft

## ORDERING INFORMATION

Case Size	Module/Voltage	Case Option Codes	Software Code	Hardware Code
<b><math>\mu</math>MPXY</b>	<b>SKW - S2E - S2Q - ILL</b>	<b>00</b>	<b>A</b>	<b>###</b>
1-Phase Input where X = 04=157" x 35" x 100", 400 W to 600 W, 4 Slots 09=157" x 35" x 100", 550 W to 1000 W, 4 Slots 10=157" x 50" x 100", 1000 W to 1200 W, 6 Slots 16=157" x 50" x 100", 1200 W to 1800 W, 6 Slots 1: See Input Derating table below for uMP16 Input Type where Y = T = Terminal Block C = IEC Connector C14 S = Barrier Strip	<b>Module Codes</b> S2 = 200 W Single O/P (1 Slot) SK = 1000 W Single O/P (3 Slot) I = 96 W Dual O/P ISO GND (1 Slot) <b>Voltage Codes:</b> See Voltage Code Table	<b>Case Option Codes</b> First digit 0 - K = Parallel Code Second digit 0 = No Options 1 = Reverse Air 2 = Not Used 3 = Global Enable 5 = Opt 1 + Opt 3	Factory assigned for modified standards	Factory assigned for modified standards



## CoolX®1800

### High Efficiency, Intelligent and Reliable 1800 W Modular Power Supplies

#### SPECIAL FEATURES

##### Modular Power Supply

- Up to 1800 W
- Up to 12 outputs
- All outputs isolated (1850 VAC)
- Variable fan speed control

##### Reliability

- MTBF > 200,000 hours
- Level 4 input surge protection
- 23.5 W always ON auxiliary power output
- Safety approved to 5000 m altitude
- 91% efficiency
- Five-year warranty

##### Flexibility

- Analog and digital management — PMBus™ monitoring and control capability
- Field-configurable — plug and play power
- Series and parallel outputs for higher voltages and currents
- Mounting options — base/side and DIN-Rail mounting

#### Total Power

- CX18S 1800 W
- CX18M 1800 W

#### Slots

6, 6

#### Cooling

#### Variable fan speed control

#### Parameters

262 mm x 127 mm x 41 mm  
(10.5 in x 5 in x 1U)

#### Certification and Compliance

##### Medical (CX18M)

- IEC60601-1 3rd edition,
- IEC60601-1-2 4th edition (EMC)
- 2 MOPP
- Dual fused

##### Industrial (CX18S)

- IEC60950, IEC62368-1
- SEMI F47<sup>1</sup>

##### Defense/Aero (All Models)

- MIL-STD-810G

#### TYPICAL APPLICATIONS

##### Medical

- Clinical diagnostic equipment, medical lasers, dialysis equipment, radiological imaging, clinical chemistry

##### Audio Equipment

- Hi Rel, harsh industrial electronics, radar (marine- and ground-based), communications, test and measurement

##### Industrial

- Test and measurement, industrial machines, automation equipment, printing, telecommunications, MIL-COTS

<sup>1</sup> SEMI F47 compliant at input voltages > 180 VAC. Consult Advanced Energy for details.

CoolX CoolMods Table				
Parameter	V <sub>nom</sub> (V)	Set Point Adjust Range (V)	I <sub>max</sub> (A)	Power (W)
<b>Single Output Modules (1 Slot)</b>				
CmA	5	2.5 to 6.0	30.0	150
CmB <sup>1</sup>	12	6.0 to 15.0 <sup>2</sup>	23.3	280
CmC	24	15.0 to 28.0	12.5	300
CmD	48	28.0 to 58.0 <sup>3</sup>	6.25	300
<b>High Power Modules (3 Slot)</b>				
CmE <sup>4</sup>	24	24 to 25.2	37.5	900
CmF <sup>4</sup>	48	48 to 50.4	18.75	900
<b>Dual Output Modules (1 Slot)</b>				
CmG <sup>5</sup> V1	24	3.0 to 30.0	4.0	120
V2	24	3.0 to 30.0	4.0	120
CmH <sup>6</sup> V1	5	3.0 to 6.0	10.0	60
V2	24	3.0 to 30.0	4.0	120
<b>Wide Trim Modules (1 Slot)</b>				
CmA-W01	5	1.0 to 6.0	30.0	150
CmB-W01	12	1.0 to 15.0 <sup>2</sup>	23.3	280
CmC-W01	24	2.0 to 28.0	12.5	300
CmD-W01	48	3.0 to 58.0 <sup>3</sup>	6.25	300
<b>High Voltage Modules (1 Slot)</b>				
CmK <sup>7</sup>	200	175 to 205	1.0	200

Environmental Specifications						
Parameter	Conditions/Description	Min	NOM	Max	Units	
Operating Temperature	Operates to specification below -20°C after 10 min warm-up	-40	—	70	°C	
Storage Temperature		-40	—	85	°C	
Derating	See derating curves	—	—	—	—	
Relative Humidity	Non-condensing	5	—	95	% RH	
Shock and Vibration	MIL-STD-810G Method 514.6	—	—	—	—	
Altitude		—	—	5000	m	

**1** Full dynamic specifications may not be met at full load when output voltage is trimmed above 13 V

**2** Max Trim 14 V when used with High Power Module

**3** Max Trim 56 V when used with High Power Module

**4** a) Only one High Power module (CmE or CmF) can be used per CoolPac

b) During load transients starting from 0% load on the High Power modules, other modules in the CoolPac may experience an output voltage dynamic during the load change. Contact applications support for details or support.

**5** For the CmG module the max combined power of both outputs is 200 W

**6** For the CmH module the max combined power of both outputs is 180 W

**7** When a CmK module is used in the same pack as a CmE or CmF module, one module slot must remain unpopulated.



#### Total Power

- CX30S 3000 W
- CX30M 3000 W

#### Slots

12, 12

#### Cooling

#### Variable fan speed control

#### Parameters

325 x 131 x 120 mm  
(12.8 x 5.2 x 4.7 in)

#### Safety

##### Medical (CX30M)

- IEC60601-1 3rd edition, IEC60601-1-2 4th edition (EMC)
- 2 MOPP
- Dual fused

##### Industrial (CX30S)

- IEC62368-1
- SEMI F47

## CoolX®3000

### High Efficiency, Intelligent and Reliable 3000 W Modular Power Supply

#### SPECIAL FEATURES

##### Modular Power Supply

- Up to 3000 W
- Up to 24 outputs
- All outputs isolated (1850 VAC)
- Variable fan speed control

##### Reliability

- MTBF > 150,000 hours
- Level 4 input surge protection
- 23.5 W always ON auxiliary power output
- Safety approved to 5000 m altitude
- 91% efficiency
- Five-year warranty

##### Flexibility

- Analog and digital management — PMBus™ monitoring and control capability
- Field-configurable — plug and play power
- Series and parallel outputs for higher voltages and currents
- Mounting options — base/side

#### TYPICAL APPLICATIONS

##### Medical

- Clinical diagnostic equipment, medical lasers, dialysis equipment, radiological imaging, chemical chemistry

##### Hi Rel

- Harsh industrial electronics, radar (marine- and ground-based), communications, test and measurement

##### Industrial

- Test and measurement, industrial machines, automation equipment, printing, telecommunications

## CoolX CoolMods Table

Parameter	V <sub>nom</sub> (V)	Set Point Adjust Range (V)	I <sub>max</sub> (A)	Power (W)
<b>Single Output Modules (1 Slot)</b>				
CmA	5	2.5 to 6.0	30.0	150
CmB <sup>1</sup>	12	6.0 to 15.0 <sup>2</sup>	23.3	280
CmC	24	15.0 to 28.0	12.5	300
CmD	48	28.0 to 58.0 <sup>3</sup>	6.25	300
<b>High Power Modules (3 Slot)</b>				
CmE <sup>4</sup>	24	24 to 25.2	37.5	900
CmF <sup>4</sup>	48	48 to 50.4	18.75	900
<b>Dual Output Modules (1 Slot)</b>				
CmG <sup>5</sup> V1	24	3.0 to 30.0	4.0	120
V2	24	3.0 to 30.0	4.0	120
CmH <sup>6</sup> V1	5	3.0 to 6.0	10.0	60
V2	24	3.0 to 30.0	4.0	120
<b>Wide Trim Modules (1 Slot)</b>				
CmA-W01	5	1.0 to 6.0	30	150
CmB-W01	12	1.0 to 15.0 <sup>2</sup>	23.3	280
CmC-W01	24	2.0 to 28.0	12.5	300
CmD-W01	48	3.0 to 58.0 <sup>3</sup>	6.25	300
<b>High Voltage Modules (1 Slot)</b>				
CmK <sup>7</sup>	200	175 to 205	1.0	200

## Environmental Specifications

Parameter	Conditions/Description	Min	NOM	Max	Units
Operating Temperature		-25	—	60	°C
Storage Temperature		-25	—	85	°C
Derating	CX30: Derate from 50°C	—	50	60	°C
Relative Humidity	Non-condensing	5	—	95	% RH
Shock		—	—	40	G
Altitude		—	—	5000	m

**1** Full dynamic specifications may not be met at full load when output voltage is trimmed above 13 V

**2** Max Trim 14 V when used with High Power Module

**3** Max Trim 56 V when used with High Power Module

**4** a) Only one High Power module (CmE or CmF) can be used per CoolPac

b) During load transients starting from 0% load on the High Power modules, other modules in the CoolPac may experience an output voltage dynamic during the load change. Contact applications support for details or support..

**5** For the CmG module the max combined power of both outputs is 200 W

**6** For the CmH module the max combined power of both outputs is 180 W

**7** When a CmK module is used in Unit A along with a CmE or CmF module, one module slot of Unit A must remain unpopulated.

When a CmK module is used in Unit B along with a CmE or CmF module, one module slot of Unit B must remain unpopulated.



#### Total Power

- FC15M 1500 + 800 W
- FC25M 2500 + 800 W
- FC40M 4000 + 800 W

#### Slots

1(fixed) + 10 (configurable)

#### Cooling

Internal fan cooled

#### Parameters

FC15M: 322 x 144.9 x 105.9 mm  
(12.68 x 5.7 x 4.17 in)

FC25M: 322 x 144.9 x 105.9 mm  
(12.68 x 5.7 x 4.17 in)

FC40M: 348 x 153 x 129.4 mm  
(13.7 x 6.02 x 5.09 in)

#### Safety

##### Medical

- IEC60601-1 3rd edition,  
IEC60601-1-2 4th edition (EMC)
- 2 MOPP
- Dual fused

## FlexiCharge

Medical Capacitor Charging, Intelligent and Reliable Modular Power Supply

#### SPECIAL FEATURES

##### Capacitor Charger

- Up to 4000 W
- 0 to 1000 VDC
- Excellent pulse to pulse stability

##### Modular ACDC Power Supply

- Accommodate standard CoolX modules, up to 800 W
- Up to 10 isolated outputs
- Series and parallel outputs for higher voltage/current

##### Reliability

- MTBF > 900,000 hours

- Level 4 input surge protection
- 3 W, 5 V auxiliary power on system signal connector J8
- 3 W, 15 V auxiliary power on capacitor charger D-SUB connector
- Safety approved to 3000 m altitude
- 85% efficiency
- Two-year warranty

##### Flexibility

- Analog and digital management — PMBus™ monitoring and control capability

#### TYPICAL APPLICATIONS

##### Capacitor Charger

- Medical laser application examples:  
Surgical lasers, laser treatment,  
laser aesthetic treatments

##### Modular ACDC Power Supply

- Low voltage system power
- Power for onboard computers and displays
- Pump power
- Power for cooling and heating
- Power for other treatments

Capacitor Charger				
Parameter	Condition	Description		
		FC15M	FC25M	FC40M
Output Voltage	Analog or digital adjustable	0 to 1000 VDC	0 to 1000 VDC	0 to 1000 VDC
Output Power		0 to 1650 W	0 to 2750 W	0 to 4400 W
Output Current	Power limits the max current	6 A	10 A	10 A
Capacitive Loading		>50 $\mu$ F	>50 $\mu$ F	>50 $\mu$ F
Pulse-to-Pulse Repeatability		$\pm$ 2 V	$\pm$ 2 V	$\pm$ 2 V

CoolX CoolMods Table				
Parameter	V <sub>nom</sub> (V)	Set Point Adjust Range (V)	I <sub>max</sub> (A)	Power (W)
<b>Single Output Modules (1 Slot)</b>				
CmA	5	2.5 to 6.0	30.0	150
CmB <sup>1</sup>	12	6.0 to 15.0 <sup>2</sup>	23.3	280
CmC	24	15.0 to 28.0	12.5	300
CmD	48	28.0 to 58.0 <sup>3</sup>	6.25	300
<b>Dual Output Modules (1 Slot)</b>				
CmG <sup>4</sup> V1	24	3.0 to 30.0	4.0	120
V2	24	3.0 to 30.0	4.0	120
CmH <sup>5</sup> V1	5	3.0 to 6.0	10.0	60
V2	24	3.0 to 30.0	4.0	120
<b>Wide Trim Modules (1 Slot)</b>				
CmA-W01	5	1.0 to 6.0	30	150
CmB-W01	12	1.0 to 15.0 <sup>2</sup>	23.3	280
CmC-W01	24	2.0 to 28.0	12.5	300
CmD-W01	48	3.0 to 58.0 <sup>3</sup>	6.25	300
<b>High Voltage Modules (1 Slot)</b>				
CmK	200	175 to 205	1.0	200

**1** Full dynamic specifications may not be met at full load when output voltage is trimmed above 13 V

**2** Max Trim 14 V when used with High Power Module

**3** Max Trim 56 V when used with High Power Module

**4** For the CmG module the max combined power of both outputs is 200 W

**5** For the CmH module the max combined power of both outputs is 180 W

Environmental Specifications						
Parameter	Conditions/Description	Min	NOM	Max	Units	
Operating Temperature		0	—	40	°C	
Storage Temperature		-40	—	85	°C	
Relative Humidity	Non-condensing	5	—	90	% RH	
Altitude		—	—	3000	m	



#### Total Power

- NP05 2400 W
- NP08 4000 W

#### Input Voltage

90 to 264 VAC

#### Slots

5, 8

#### Safety

- UL UL62368-1
- CSA C22.2 No. 62368-1
- ANSI/AAMI ES 60601-1
- CAN/CSA-C22.2 No 60601-1
- CB Certificate and report
- CE Mark (LVD + RoHS)
- CCC CQC optional

## NeoPower Series

### Next Generation Medium Power Configurable Power Supply Up to 4000 W

#### SPECIAL FEATURES

- Medical BF rated
- Output on/off control
- Active current share
- Support MODBUS RTU digital communication. Support PMBus, CANOPEN and MODBUS with an adapter
- Outputs program as voltage or current source
- Configurable output UP/DOWN sequencing
- High power density (18.18 W/in<sup>3</sup>)
- Intelligent fan (speed control/fault status)
- Input to output: 5000 VAC or 7000 VDC, 2 x MOPP
- Input to earth: 1800 VAC or 2500 VDC, 1 x MOPP
- Output to earth: 1800 VAC or 2500 VDC, 1 x MOPP
- Programmable voltage, current limit, inhibit/enable
- Meet SEMI F47 compliance
- Optional conformal coating
- End user installable modules (no hi-pot or safety certifications required to install modules)
- Field upgradeable firmware
- RoHS compliant

#### Electrical Specifications

##### Input

AC Input Range	Low line 1-phase: 90 to 132 VAC High line 1-phase: 180 to 264 VAC
AC Input Range	Low line 1-phase: 90 to 132 VAC High line 1-phase: 180 to 264 VAC
AC Input Frequency	47 to 440 Hz
Max Power	NP05 - Low line: 1200 W; High line: 2400 W NP08 - Low line: 2000 W; High line: 4000 W
Max Input Current	27 A
Power Factor	0.99 at full load and nominal line
Max Inrush Current	80 A
Harmonic Distortion	Meets EN 61000-3-2
Line Interruption	Meets SEMI F47-0706, 53, 58, S14 at nominal input voltages and full load condition
Input Leakage Current - Industrial	< 2.5 mA
Input Leakage Current - Medical BF	Earth (normal condition) < 0.5 mA Earth (single fault condition) < 1.0 mA Touch/Patient (normal condition) < 0.1 mA Touch/Patient (single fault condition) < 0.5 mA
Input Protection	Internal fuse on all input lines (Not user serviceable)
Input Over-voltage Protection	Up to 115% of Nominal input without damage
Efficiency	90% typical (Contact support for efficiency curve for a configured model)
Standby Output	5 V/2 A

**1 Slot Single Output Modules**

Parameter	1S 0005M/L	1S 00012M/L	1S 0015M/L	1S 0024M/L	1S 0048M/L
Nominal Output Voltage	5 V	12 V	15 V	24 V	48 V
Rated Output Current	56 A	41.6 A	33.3 A	20.8 A	10.4 A
Max Output Power	280 W	400 W	400 W	400 W	400 W
Max Capacitance for Dynamic Load	820 $\mu$ F	470 $\mu$ F	220 $\mu$ F	220 $\mu$ F	220 $\mu$ F
Output in Voltage Source (VS) Mode					
Output Voltage Range	1.0 to 6.0 V	2.4 to 14.4 V	3.0 to 18.0 V	4.8 to 28.8 V	9.6 to 57.6 V
Output Current Range	0 to 56 A	0 to 41.6 A	0 to 33.3 A	0 to 20.8 A	0 to 10.4 A
Regulation	$\pm 1\%$ of V <sub>non</sub>				
Ripple & Noise @ 20 MHz BW (Pk-to-Pk)	1% of V <sub>set</sub> or V <sub>nom</sub> , whichever is greater Measured with a 0.1 $\mu$ F ceramic capacitor in parallel with a 10 $\mu$ F tantalum or low ESR E-CAP.				
Ripple & Noise @ 20 MHz BW (RMS)	0.1% of V <sub>set</sub> or V <sub>nom</sub> or 10 mV, whichever is greater Measured with a 0.1 $\mu$ F ceramic capacitor in parallel with a 10 $\mu$ F tantalum or low ESR E-CAP.				
Common Mode Ripple/Noise (Pk-to-Pk) @ 10 Hz to 70 MHz BW <sup>2</sup>	0.1% of V <sub>set</sub> or V <sub>nom</sub> or 10 mV, whichever is greater Across a 100 Ohm resistor between both DC outputs, including ground, at the DC power connector and chassis ground. Use FET probes such as Tektronix model P6046 or equivalent.				
Output in Current Source (CS) Mode					
Output Current Range	2.8 to 56 A	1.66 to 41.6 A	1.33 to 33.3 A	0.83 to 20.8 A	0.42 to 10.4 A
Minimum Output Voltage	1.0 V	2.4 V	3.0 V	4.8 V	9.6 V
Regulation	$\pm 2\%$ of I <sub>rated</sub>				
Ripple & Noise @ 20 MHz BW (RMS)	$\pm (1\% \text{ of } I_{set} + 1\% \text{ of } I_{rated})$ Measured with a 0.1 $\mu$ F ceramic capacitor in parallel with a 10 $\mu$ F tantalum or low ESR E-cap.				

<sup>1</sup> Suffix M for Medical BF Rated application, and L for Industrial Low Noise application.<sup>2</sup> For Low Noise Module Variants only.**1 Slot Dual Output Modules**

Parameter	1D 2424M
Output in Voltage Source (VS) Mode	
Nominal Output Voltage	V1: 24 V, V2: 24 V
Output Voltage Range	V1: 2.4 to 28.8 V, V2: 2.4 to 28.8 V
Output Current Range	V1: 0 to 10.4 A, V2: 0 to 10.4 A
Output in Current Source (CS) Mode	
Nominal Output Current	V1: 8.35 A, V2: 8.35 A
Output Current Range	V1: 0.3 to 10.4 A, V2: 0.3 to 10.4 A
Minimum Output Voltage	V1: 2.4 V, V2: 2.4 V
Max Output Power	V1: 200 W, V2: 200 W
Max Capacitance for Dynamic Loading	V1: 100 $\mu$ F, V2: 100 $\mu$ F
Module Connected in Parallel	Not supported
Module Connected in Series	Not supported

## NEOPOWER SERIES

Output Voltage Code Table							
Voltage	Code	Voltage	Code	Voltage	Code	Voltage	Code
2 V	A	5.5 V	G	14 V	M	30 V	S
2.2 V	B	6 V	H	15 V	N	33 V	T
3 V	C	8 V	I	18 V	O	36 V	U
3.3 V	D	10 V	J	20 V	P	42 V	V
5 V	E	11 V	K	24 V	Q	48 V	W
5.2 V	F	12 V	L	28 V	R	54 V	X

Parallel and Series Connection Table				
Case	Starting Slot	#Slots Connected Across	Parallel/Series	Module Slots Connected
NP05/08	1	2	P/S	1&2
NP05/08	2	2	P/S	2&3
NP05/08	3	2	P/S	3&4
NP05/08	4	2	P/S	4&5
NP08	5	2	P/S	5&6
NP08	6	2	P/S	6&7
NP08	7	2	P/S	7&8
NP05/08	1	3	P/S	1&2&3
NP05/08	2	3	P/S	2&3&4
NP05/08	3	3	P/S	3&4&5
NP08	4	3	P/S	4&5&6
NP08	5	3	P/S	5&6&7
NP08	6	3	P/S	6&7&8
NP05/08	1	4	P/S	1&2&3&4
NP05/08	2	4	P/S	2&3&4&5
NP08	3	4	P/S	3&4&5&6
NP08	4	4	P/S	4&5&6&7
NP08	5	4	P/S	5&6&7&8
NP05/08	1	5	P/S	1&2&3&4&5
NP08	2	5	P/S	2&3&4&5&6
NP08	3	5	P/S	3&4&5&6&7
NP08	4	5	P/S	4&5&6&7&8
NP08	1	6	P/S	1&2&3&4&5&6
NP08	2	6	P/S	2&3&4&5&6&7
NP08	3	6	P/S	3&4&5&6&7&8
NP08	1	7	P/S	1&2&3&4&5&6&7
NP08	2	7	P/S	2&3&4&5&6&7&8
NP08	1	8	P/S	1&2&3&4&5&6&7&8

## Ordering Information

Case Code	Module Options Codes	Case Option Codes	Parallel/Series Code	Software Code	Communication Bus	Modification Code
	<b>First</b> - # of Slots <b>Second</b> - Type <b>Third</b> - Voltage Code <b>Forth</b> - Option Code	<b>First</b> - Case Options <b>Second</b> - Configuration Code	Separate multiple codes with "&"			
<b>NPWWXYZ</b>	<b>XYZO</b>	<b>XY</b>	<b>XYZ</b>	<b>A</b>	<b>0</b>	<b>XXX</b>
<b>WW</b> = Number of Slots - Case Size 05 = 5 Slots 08 = 8 Slots <b>X</b> = Input Voltage Range W = Wide range 90 to 264 VAC H = High line L = Low line <b>Y</b> = Input Phase 1 = Single phase <b>Z</b> = Input Line A = AC input	<b>X</b> = Number of Slots for Module 1 = 1 slot, single O/P 2 = 1 slot, dual O/P <b>Y</b> = Module Type L = Low Noise M = Medical <b>Z</b> = Voltage Code(s) See table <b>O*</b> = Option Codes 1 O/P Module Only 0 = DVS, Module ON 1 = DCS, Module ON 2 = AVS, Module ON 3 = ACS, Module ON 4 = DVS, Module OFF 5 = DCS, Module OFF 6 = AVS, Module OFF 7 = ACS, Module OFF Z = Option defined in MOD-I	<b>X</b> = Case Options 0 = No options 1 = Reverse air Z = See MOD-I <b>Y</b> = Configuration Code 0 = Shipped from AEI cases/modules C = Shipped configured, modules installed	<b>See Table</b> 000 = No series/parallel	A = Standard B = Non standard voltage	0 = Standard MODBUD RTU Z = See MOD	Advanced Energy assigned code to track modification made from the standard design  CC = Conformal coating

Note \* - Use the output 2 voltage code for the dual O/P module. For example the 24 V-24 V medical, 300 W, dual output module, the code is 2MQQ.

## Environmental Specifications

Operating Temperature	0°C to +50°C ambient: full performance; -20°C startup; 50°C to +70°C ambient: output power derated: 70°C @ sea level - 85% derated output power 50°C @ 3000 meters above sea level - 90% derated output power 70°C @ 3000 meters above sea level - 75% derated output power
Storage Temperature	-40 to 85°C
Electromagnetic Susceptibility	Designed to meet EN61000-4; -2, -3, -4, -5, -6, -8, -11 Level 3
Humidity	Operating; Non-condensing 20 to 90% RH
Vibration	Operating Sinusoidal Vibration MIL-STD-810G, method 514.6, procedure I, category 4-11: 10 to 2000 Hz 6.0 Grms 30 mins three axis (Non Operating ); 10 to 500 Hz 4.22 Grms 30 mins three axis (Operating); 1G 5 to 500 Hz sine vib 1 oct/min (Sine Vib) Operating Random Vibration: IPC-9592B Class 1 Non-Operating Vibration (Packaged): IPC-9592B Class 1; MIL-STD-810G, Method 514.6, Procedure 1, Category 7, Table 514.6C-VII General Exposure
MTBF	Calculated: 200,000 hours, Telcordia specifications @ 25°C ambient at full load, nominal input line AC Demonstrated: > 500,000 hours



#### Total Power

Up to 4920 W

#### Input Voltage

- 85 to 264 VAC
- 120 to 300 VDC

#### # of Outputs

Up to 24

#### Safety

- UL UL60950/UL2601
- CSA CSA22.2 No. 234 Level 5
- VDE EN62368/EN60601-1
- BABT Compliance to EN60950/EN60601 BS7002
- CB Certificate and report
- CE Mark to LVD

## Intelligent VS Series

Intelligent Modular Power Supply for Optimum Flexibility  
Up to 4920 W

### SPECIAL FEATURES

#### Medical EN60601-1 approval

- Intelligent I<sup>2</sup>C control
- Voltage adjustment on all outputs (manual or I<sup>2</sup>C)
- Configurable input and output OK signals and indicators
- Configurable inhibit/enable
- Configurable output UP/DOWN sequencing
- High power density (12 W/in<sup>3</sup>)
- Intelligent fan (speed control/fault status)
- µP controlled PFC input with active Inrush protection

- I<sup>2</sup>C monitor of voltage, current and temp
- Programmable voltage, current limit, inhibit/enable through I<sup>2</sup>C
- CAN BUS and RS-485 interface option
- Optional extended hold-up module (SEMI F47 compliance)
- Increased power density to 150%
- Optional conformal coating
- Industrial temp range (-40 to 70°C)
- Uses standard iMP modules
- Field upgradeable firmware
- RoHS compliant

#### Single



210 W



750 W



360 W



1500 W (2.0 to 8.0 V)

#### Dual



144 W



1500 W (10 to 60 V)

#### Triple



36 W



1500 W with Bus Bar Adaptor Option  
(used with the 10 to 60 V module)

Electrical Specifications	
Input	
Input Range	
iVS1 & iVS3:	90 to 264 VAC 1Ø: 120 to 300 VDC
iVS6 & iVS8:	170 to 264 VAC 3Ø
iVS8H <sup>1</sup> :	380/480 VAC 3Ø
Frequency	47 to 63 Hz
Inrush Current	40 A peak maximum (soft start)
Efficiency	Up to 85% @ full case load
Power Factor	0.99 typ meets EN61000-3-2
Turn-on Time	AC on 1.5 sec typical, inhibit/enable 150 ms typical. Programmable
EMI Filter	CISPR 22/EN55022 Level "B"
Leakage Current	300 µA max @ 240 VAC; 47 to 63 Hz
Radiated EMI	CISPR 22/EN55022 Level "B"
Holdover Storage	10 ms minimum (independent of input VAC) additional 20 ms holdover storage with optional HUP module (SEMI F47 compatible)
AC OK	> 5 ms early warning minutes before outputs lose regulation. Full cycle ride thru (50 Hz). Programmable
Harmonic Distortion	Meets EN61000-3-2
Isolation	Meets EN60950 and EN60601 Meets 1 MOPP Primary to ground, 2 MOPP Primary to Secondary <sup>1</sup>
Global Inhibit/Enable	TTL, Logic "1" and Logic "0"/configurable
Warranty	Three years
Output	
Adjustment Range <sup>2</sup>	±10% minimum all outputs (manual) (full module adjustment range using I <sup>2</sup> C)
Margining	±4 to 6% Nominal analog (single output module only)
Overall Regulation	0.4% or 20 mV max (1500 W modules 1% max)
Ripple	RMS: 0.1% or 10 mV, whichever is greater Pk-Pk: 1.0% or 50 mV, whichever is greater Bandwidth limited to 20 MHz
Dynamic Response	< 2% or 100 mV, with 25% load step
Recovery Time	To within 1% in < 300 µs
Over-current Protection <sup>3</sup>	Configurable through I <sup>2</sup> C. single output module and main output of the dual output module 105 to 120% of rated output current. Aux output of dual output module 105 to 140% of rated output current. Special programmable OCP delay on 1500 W module from 100 ms to 25.5 seconds with shutdown features
Short-circuit Protection	Protected for continuous short-circuit. Recovery is automatic upon removal of short (Shutdown mode on 1500 W module)
Over-voltage Protection <sup>2</sup>	Configurable through I <sup>2</sup> C
- Single Output Module	2 to 5.5 V 122 to 134%; 6 to 60 V 110 to 120%
- Dual Output Module	2 to 6 V 122 to 134%; 8 to 28 V 110 to 120%
- Triple Output Module	No over-voltage protection provided
Thermal Protection <sup>2</sup>	Configurable through I <sup>2</sup> C All outputs disabled when internal temp exceeds safe operating range. > 5 ms warning (AC OK signal) before shutdown
Remote Sense	Up to 0.5 V total drop (Not available on triple output module)
Single Wire Parallel	Current share to within 2% of total rated current
DC OK <sup>2</sup>	±5% of Nominal. Configurable through I <sup>2</sup> C
Minimum Load	Not required
Housekeeping Bias Voltage	5 VDC @ 1.0 A max present whenever AC input is applied
Module Inhibit <sup>2</sup>	Configured and controlled through I <sup>2</sup> C
Output/Output Isolation	> 1 Megohm, 500 V

<sup>1</sup> iVS8H does Not have Medical or MOPP approvals<sup>2</sup> Can be controlled via I<sup>2</sup>C<sup>3</sup> Controlled via I<sup>2</sup>C but requires load calibration

## INTELLIGENT MEDIUM-HIGH POWER

Environmental Specifications	
Operating Temperature	-40 to 70°C ambient. Derate each output 2.5% per degree from 50 to 70°C. (-20°C start-up)
Storage Temperature	-40 to 85°C
Electromagnetic Susceptibility	Designed to meet EN61000-4; -2, -3, -4, -5, -6, -8, -11 Level 3
Humidity	Operating; Non-condensing 10 to 95% RH
Vibration	IEC68-2-6 to the levels of IEC721-3-2
MTBF Demonstrated	> 550,000 hours at full load, 220 VAC and 25°C ambient conditions

Output Module Line-up						
Module Code	1	2	3	5	4	
Module Type	Single	Single	Single	Single	Dual	Triple
Max Output Power	210 W	360 W	750 W	1500 W	144 W	36 W
Max Output Current	35 A	60 A	150 A	300 A	10 A	2 A
Output Voltages Available <sup>1</sup>	2 to 60 V	6 to 15, 24 to 28; 6 to 15; 6 to 15; 6 to 15; 2 to 6; 2 to 6, 2 to 6; 24 to 28, 24 to 28; 24 to 28; 2 to 6	8 to 15, 8 to 15, 2 to 6; 8 to 15, 8 to 15, 8 to 15; 8 to 15, 8 to 5, 18 to 28; 8 to 15, 18 to 28, 2 to 6			
Standard Voltage Increments	25	25	25	18	16	18
Remote Sense	Yes	Yes	Yes	Yes	Yes	No
Remote Margin <sup>1</sup>	Yes	Yes	Yes	Yes	No	No
V-Program - I <sup>2</sup> C Control <sup>1</sup>	Yes	Yes	Yes	Yes	Yes	No
Active Current Share	Yes	Yes	Yes	Yes	Yes	No
Module Inhibit - I <sup>2</sup> C Control <sup>1</sup>	Yes	Yes	Yes	Yes	Yes	Yes
Module Inhibit - Analog	Yes	Yes	Yes	Yes	No	No
Over-voltage/Over-current Protection <sup>1</sup>	Yes	Yes	Yes	Yes	Yes	Yes
Minimum Load Required	No	No	No	No	No	No
Slots Occupied in any iMP Case	1	2	3	4	1	1

<sup>1</sup> Programmables

## Output Module Voltage/Current

Voltage	Voltage Code	Single Output Module Code				Dual Output <sup>2</sup>		Triple Output		I <sup>2</sup> C Adjustment Ranges <sup>3</sup>
		1	2	3	5	V1	V2			
2 V	A	35 A	60 A	150 A	300 A	10 A	10 A	—	—	2 A 1.8 to 2.2
2.2 V	B	35 A	60 A	150 A	300 A	10 A	10 A	—	—	2 A 2.0 to 2.4
3 V	C	35 A	60 A	150 A	300 A	10 A	10 A	—	—	2 A 2.7 to 3.3
3.3 V	D	35 A	60 A	150 A	300 A	10 A	10 A	—	—	2 A 3.0 to 3.6
5 V	E	35 A	60 A	150 A	300 A	10 A	10 A	—	—	2 A 4.5 to 5.5
5.2 V	F	35 A	60 A	144 A	288 A	10 A	10 A	—	—	2 A 4.7 to 5.7
5.5 V	G	34 A	58 A	136 A	273 A	10 A	10 A	—	—	2 A 5.0 to 6.1
6 V	H	23 A	42 A	97.5 A	250 A	10 A <sup>1</sup>	10 A <sup>1</sup>	—	—	2 A 5.4 to 6.6
8 V	I	20 A	36 A	84.4 A	140 A	10 A	4 A	1 A	1 A	1 A 7.2 to 8.8
10 V	J	18 A	32 A	75 A	140 A	10 A	4 A	1 A	1 A	1 A 9.0 to 11.0
11 V	K	17 A	31 A	68 A	136.3 A	10 A	4 A	1 A	1 A	1 A 9.9 to 12.1
12 V	L	17 A	30 A	62.5 A	125 A	10 A	4 A	1 A	1 A	1 A 10.8 to 13.2
14 V	M	14 A	21 A	53.5 A	107 A	9 A	4 A	1 A	1 A	1 A 12.6 to 15.4
15 V	N	14 A	20 A	50 A	100 A	8 A	4 A	1 A	1 A	1 A 13.5 to 16.5
18 V	O	11 A	19 A	41.6 A	83.3 A	—	—	0.5 A	0.5 A	0.5 A 16.2 to 19.8
20 V	P	10.5 A	18 A	37.5 A	75 A	—	—	0.5 A	0.5 A	0.5 A 18.0 to 22.0
24 V	Q	8.5 A	15 A	30 A	62.5 A	4 A	2 A	—	0.5 A	0.5 A 21.6 to 26.4
28 V	R	6.7 A	11 A	26.8 A	53.5 A	3 A	2 A	—	0.5 A	0.5 A 25.2 to 30.8
30 V	S	6.5 A	11 A	25 A	50 A	—	—	—	—	27.0 to 33.0
33 V	T	6.2 A	10.9 A	22.7 A	35.8 A	—	—	—	—	29.7 to 36.3
36 V	U	5.8 A	10 A	20.8 A	35.8 A	—	—	—	—	32.4 to 39.6
42 V	V	4.2 A	7.5 A	16 A	35.7 A	—	—	—	—	37.8 to 46.2
48 V	W	4 A	7.5 A	15.6 A	31.2 A	—	—	—	—	43.2 to 52.8
54 V	X	3.7 A	6 A	13.9 A	27.7 A	—	—	—	—	48.6 to 59.4
60 V	Y	3.5 A	6 A	12.5 A	25 A	—	—	—	—	54.0 to 66.0

## Consult Factory

Special	Z	35 A	60 A	150 A	—	—	10 A	—	—	2.3 to 2.6
Special	Z	35 A	60 A	150 A	—	—	10 A	—	—	3.7 to 4.4
Special	Z	20 A	36 A	80 A	140 A	—	8 A	—	—	6.7 to 7.1

<sup>1</sup> Consult factory for extended range down to 6 V.<sup>2</sup> Total output power on dual model must not exceed 144 W.<sup>3</sup> For single output modules only.

## ORDERING INFORMATION

Sample below is 3210 W case with 12 V @ 125 A; 24 V @ 8.5 A; 5 V @ 60 A; 12 V @ 10 A and 12 V @ 4 A; with no options.

Case Size	Module/Voltage/Option Codes	Case Option Codes	Software Code	Hardware Code
iVS1	- 5L1 - 1Q1 - 2E0 - 4LL0 - 00 - A - ##	Case Option Codes	Software code used for configuration change. "A" is standard	Factory assembled for hardware of firmware mods.
<b>Case Size (mm)</b> <b>1-Phase Input</b> 1 = 5" x 5" x 11"; 1500 to 3210 W, 9 slots (127 x 127 x 279.4) 3 = 5" x 8" x 11"; 1800 to 4920 W, 14 slots (127 x 203.2 x 279.4) <b>3-Phase Input</b> 6 = 5" x 5" x 11"; 3120 W, 9 slots (127 x 127 x 279.4) 8 = 5" x 8" x 11"; 4920 W, 14 slots (127 x 203.2 x 279.4) 8H <sup>1</sup> = 5" x 8" x 11"; 4920 W, 14 slots (127 x 203.2 x 279.4) 1: The input is 380 to 440 VAC 3 phase Nominal, 3-phase versions Not medically approved.	<b>Module Codes</b> Module/voltage/option codes Module Codes: (None) = 36 W triple O/P (1 slot) 1 = 210 W single O/P (1 slot) 2 = 360 W single O/P (2 slot) 3 = 750 W single O/P (3 slot) 5 = 1500 W single O/P (slot 4) 4 = 144 W dual O/P (1 slot) HUP = Extra 30mS hold-up (1 slot) <b>Voltage Codes:</b> See Output Module Voltage/Current table above <b>Option Codes:</b> 0 = Standard 1 = Module enable 2 = Constant current 3 = 1 & 2 combined 4 = Set for use in standard (Non-intelligent case) 5 = Shutdown mode for 1500 W 6 = 1 & 5 combined 7-9 = Future	First Digit 0-9 = Parallel code (See parallel codes table in datasheet) Second Digit 0 = No options 1 = Reverse air 2 = Not used 3 = Global enable 4 = Fan idle w/inhibit 5 = Opt 1 + Opt 3 6 = Opt 1 + Opt 4 7 = Opt 3 + Opt 4 8 = Opt 1 + 3 + 4 9 = RS485 73-544-001 B = USB 73-546-001 C = 9 + 3 D = CANBus 73-544-004 E = D + 3	Ordering Note: 1. USB to I <sup>2</sup> C module order code 73-769-001	



#### Total Power

Up to 30 kW

#### Input Voltage

- 180 to 264 VAC
- 342 to 528 VAC
- 600 VAC for Canadian Version
- 432 to 528 VAC for 15/30 kW Models
- 3-Phase
- 1-Phase available on iHP12 Model

#### # of Outputs

Up to 8

#### Safety

- UL 62368-1 2<sup>nd</sup> Edition; IEC62368-1/EN62368-1
- CSA C22.2 No. 62368-1-07, 2<sup>nd</sup> Edition
- EN60601-1; IEC60601-1; IEC60601
- UL 60601-1 1st Edition; ANSI/AAMI ES60601-1 (2005 + C1:09 + A2:10) "3<sup>rd</sup> Ed"
- CAN/CSA-C22.2 No. 60601-1 (2008)
- UL/CSA 61010 and IEC/EN 61010-1
- CB Certificate and Report
- CE (LVD+RoHS), EN60950-1

## Precision High Power System

Up to 30,000 W

#### SPECIAL FEATURES

- Multi output precision high power system
- Standard 19" rack
- Outputs parallel up to 1600 A
- Outputs series up to 1000 V
- 100% digital control
- Outputs program as voltage or current source
- Versatile input configurable to:
  - Low Line 180 to 264 VAC Single/3-Phase
  - High Line 342 to 528 VAC 3-Phase
- Medical safety approved – No ISOLATION XFMR NEEDED
- Flexible control interfaces: Analog 0 to 5 V or 0 to 10 V; Digital Ethernet UDP, RS485, CAN, etc. or Ethernet TC/IP with PowerPro Connect Module option. Command protocol standard PMBus
- Air cooled
- Semi F47 compliance
- Field upgradeable firmware
- Programmable slew rate
- Fast current slew rate up to 200 Hz
- Active power factor correction
- User defined command profiles
- Direct drive current source for large scale LED grow luminaries

#### Electrical Specifications

Input Parameter	19" Rack 24 kW strapped as 3-Phase 380/480 VAC Nominal (iHP24H3A/L)	19" Rack 24 kW strapped as 3-Phase 208/240 VAC Nominal (iHP24L3A/L)
Input Range	342 VAC to 528 VAC (Nominal rating 380/480 VAC)	187.5 VAC to 264 VAC (Nominal rating 208/240 VAC)
Number of Phases	3-phase (Wye or Delta) 4 wire total (3-phase and 1 protective earth ground)	
Frequency	47 to 440 Hz	
Phase Detection	Loss of phase will inhibit unit off Housekeeping/comms must continue with phase loss	
Max Current/Phase	51 A @ 380 VAC 40 A @ 480 VAC 44 A @ 432 VAC for iHP30	84 A @ 208 VAC
Under-voltage Detection	Nominal input locked on at turn-on. Under-voltage shutdown @ 15% below Nominal. Turn-on @ 12% below Nominal. Not to interfere with SEMI F47 specs	
Current Inrush	2.5 x max input current	
Power Factor	> 0.9 @ full load and Nominal line	> 0.98 @ full load and Nominal line
Harmonic Distortion	THD < 13%, PWHD < 22% (refer to EN 61000-3-12)	
Line Interruption	Designed to meet SEMI F47-0706, 53, 58, S14 @ Nominal input voltages	
Input Leakage Current	< 2.5 mA Note for fixed condition 3rd edition leakage = 5 mA	
POWER Switch	Front panel power switch required	
Input Protection	Internal fuse (Not user serviceable)	
Input Over-voltage Protection	Up to 115% of Nominal input shall Not damage unit	
Phase Imbalance	≤ 5%	
Rack Parallel	Up to 6 racks (144 kW)	

Output – General Specifications												
Parameter												
Module Code	SL	SQ	ST	SW	S8	S1	SA	S2				
# Outputs	1	1	1	1	1	1	1	1				
Nominal O/P (V)	12.0 V	24.0 V	32.0 V	48.0 V	80.0 V	125.0 V	200.0 V	250.0 V				
Max Power (W)	2400 W	2880 W	2880 W	3000 W	3000 W	3000 W	3000 W	3000 W				
O/P Current Range (A)	0.0 A to 200 A	0.0 A to 120 A	0.0 A to 90 A	0.0 A to 62.5 A	0.0 A to 37.5 A	0.0 A to 24 A	0.0 A to 15 A	0.0 A to 12 A				
Power Density (W/in <sup>3</sup> )	32.5	39.0	39.0	40.6	40.6	40.6	39.0	40.6				
Efficiency (%)	93.5	93.5	93.5	93.5	93.5	93.5	93.5	93.5				
Module Input Voltage	400 VDC											
Module Operating Temp	0 to +65°C; Baseplate Temp TBD											
Series Operation	250 V modules can be connected in series up to 800 V for Medical and 1000 V above ground with No operation ON/OFF limitations											
Parallel Operation	Up to 8 modules can be paralleled in 1 rack, with up to 6 racks connected in parallel Single Wire Parallel connection will be provided as part of configuration											
Parameter												
Module Code	TW				T3							
# Outputs	1				1							
Nominal O/P (V)	50				300							
Max Power (W)	12000				12000							
O/P Current Range (A)	0 - 270				0 - 50							
Power Density (W/cu-in)	TBA				TBA							
Module Input Voltage	395 V ± 5 V											
Module Operating Temp	0°C to +65°C											
Series Operation	Can be connected in series up to 720 V											
Parallel Operation	Up to two (2) modules can be paralleled in one (1) rack, with up to six (6) racks connected in parallel. Single Wire Parallel connection will be provided as part of configuration.											

## PRECISION HIGH POWER

Output – Module In Constant Voltage Mode								
Constant Voltage								
Module Code	SL	SQ	ST	SW	S8	S1	SA	S2
Nominal Output (V)	12	24	32	48	80	125	200	250
Setting Range (V)	0.6 to 14.4 V	1.2 to 28.8 V	1.6 to 38.4 V	2.4 to 57.6 V	4.0 to 96.0 V	6.25 to 150.0 V	10.0 to 240.0 V	12.5 to 300.0 V
Low Frequency RMS Ripple (mV)	24	48	64	96	160	250	400	500
Line Regulation (mV)	12	24	32	48	80	125	200	250
Load Regulation (mV)	24	48	64	96	160	250	400	500
P-P Ripple (mV)	60	120	100	240	400	625	1250	1250
Drift (Temp Stability)	$\pm 0.05\%$ of $I_{out}$ Rated over 8 hours, after 30 min warm-up, constant Line, Load and Temp							
Temp Coefficient (PPM/ $^{\circ}$ C)	200							
Pgm Accuracy (mV)	Digital: 0.1% of Nominal Output Voltage; Analog: 1.0% of Nominal Output Voltage							
Pgm Resolution (mV)	SL=TBD; SQ=1; SW=2; S8=8; S1=6; S2=21							
Meas Accuracy (mV)	0.2% + 0.2% of Nominal Output Voltage							
Meas Resolution	SL=TBD; SQ=1; SW=2; S8=8; S1=6; S2=21							
Transient Response	Max 5.0% deviation from current set point must recover within 1mS for a 50% step load							
Current Sense Method	Internal Shunt; External Shunt can be used for higher resolution and accuracy							

Output – Module In Constant Current Mode								
Constant Voltage - Programmable load compensation available for resistive and inductive loads; capacitive load applications; and LED drive applications								
Module Code	SL	SQ	ST	SW	S8	S1	SA	S2
Nominal Output (V)	12	24	32	48	80	125	200	250
Setting Range (A)	0.0 to 200 A	0.0 to 120 A	0.0 to 90 A	0.0 to 62.5 A	0.0 to 37.5 A	0.0 to 24 A	0.0 to 15 A	0.0 to 12 A
RMS Ripple (mA)	200	120	90	62.5	37.5	24	500	12
Line Regulation (mA)	200	120	90	125	93.75	48	200	24
Load Regulation (mA)	800	480	375	250	150	96	400	48
P-P Ripple (mA)	N/A							
Drift (Temp Stability)	$\pm 0.05\%$ of $I_{out}$ Rated over 8 hours, after 30 min warm-up, constant Line, Load, and Temp							
Temp Coefficient (PPM/ $^{\circ}$ C)	SL, SQ = 300 PPM; All other modules are 200 PPM. Temp Coefficient at rack level is [Temp Coefficient (module level)] + [4500 PPM of $I_{out\_max}$ ]							
Pgm Accuracy (A)	0.7% digital, 1.3% of rated output max analog							
Pgm Resolution (mA)	79.2	26.4		13.2	10	5.2	2.6	2.6
Meas Accuracy	0.7% + 0.7% of Rated Output Max							
Meas Resolution	79.2	26.4		13.2	10	5.2	2.6	2.6
Transient Response	0 to 63% output current change in 7.5 mSec, residual value 1%, settling time 35 mSec							
Current Sense Method	Internal Shunt							

Ordering Information							
Case Code		Module Codes		Parallel/Series Case Code			
iHP**XYZA-		-XVZ* (x4/x8)		-XX--*			
Case Decoder	iHP**XYA	Module Decoder	XVZ	First Digit	Second Digit		
** = Case Power		X = Output Type		0 = None	0 = None		
	12 = 12kW 19" Rack 15 = 15kW 19" Rack 24 = 24kW 19" Rack 30 = 30kW 19" Rack 24S = 24kW 19" Rack Short 30S = 30kW 19" Rack Short		S = Single O/P (1-Slot) T = Single O/P (3-Slot)	1 = Slot 1 & 2	P = Parallel		
				V = Nominal Voltage	2 = Slot 2 & 3		
X = Voltage Range		A = 200V B = Future C = Future D = Future L = 12V Q = 24V T = 32V W = 48V (50V for 12kW) 8 = 80V 1 = 125V 2 = 250V 3 = 300V (12kW ONLY)	3 = Slot 3 & 4 4 = Slot 4 & 5 5 = Slot 5 & 6 6 = Slot 6 & 7 7 = Slot 7 & 8 8 = Slot 1, 2, & 3 9 = Slot 1, 2, 3, & 4	1 = Combo 2 P/S	-XXX		
Y = Input Phase				2 = Combo 2 S/P	Factory Assigned		
	1 = Single Phase 3 = 3 Phase			3 = Combo 3 P/P/S			
				4 = Combo 3 P/S/P			
Z = Cooling		Z = Mode	Blank = Standard	5 = Combo 3 P/S/S			
	A = Air Cooled		P = Precision	6 = Combo 3 S/P/P			
				7 = Combo 3 S/P/S			
A = Accessory Options				C = Slot 1, 2, 3, 4, 5, 6, & 7	A = Combo 4 P/P/S/P		
	Blank = Full control C = Factory Configured and Tested 1-9 = Future			D = Slot 1, 2, 3, 4, 5, 6, 7, & 8	B = Combo 4 P/P/S/S		
				E = Slot 1 & 2; 3 & 4	C = Combo 4 P/S/P/P		
				F = Slot 1 & 2; 3 & 4; 5 & 6	D = Combo 4 P/S/P/S		
				G = Slot 1 & 2; 3 & 4; 5 & 6; 7 & 8	E = Combo 4 P/S/S/P		
				H = Slot 1, 2, & 3; 4 & 5	F = Combo 4 P/S/S/S		
				J = Slot 1, 2, & 3; 4 & 5; 6 & 7	G = Combo 4 S/P/P/P		
				K = Slot 1, 2, & 3; 4, 5, & 6	H = Combo 4 S/P/P/S		
				L = Slot 1, 2, & 3; 4, 5, & 6; 7 & 8	J = Combo 4 S/P/S/P		
				M = Slot 1, 2, 3, & 4; 5 & 6	K = Combo 4 S/P/S/S		
				N = Slot 1, 2, 3, & 4; 5 & 6; 7 & 8	L = Combo 4 S/S/P/P		
				P = Slot 1, 2, 3, & 4; 5, 6, & 7	M = Combo 4 S/S/P/S		
				R = Slot 1, 2, 3, & 4; 5, 6, 7, & 8	N = Combo 4 S/S/S/P		
				S = Slot 1, 2, 3, 4, & 5; 6 & 7			
				T = Slot 1, 2, 3, 4, & 5; 6, 7, & 8			
				U = Slot 1, 2, 3, 4, 5, & 6; 7 & 8			
				Z = Special Defined by MOD Code			
-** is allowed for secondary series/parallel code							
would become:		1 = Groups 1 & 2		P = Parallel			
<b>iHP24H3A-SW(6)-S8(2)-00</b>		8 = Groups 1, 2, & 3		S = Series			
		9 = Groups 1, 2, 3, & 4		1 = Combo 2 P/S			
		E = Groups 1 & 2; 3 & 4		2 = Combo 2 S/P			



#### Total Power

Up to 24 KW

#### Input Voltage

90 to 264 VAC Nominal Single Phase

#### # of Outputs

Up to 8

#### Safety

- EN62368-1
- UL/CSA62368-1
- IEC62368-1

## Intelligent Transfer Switch (iTS)

Up to 24000 W

### SPECIAL FEATURES

- 5-year manufacturer's warranty
- Modular 8 channel A:B switch
- Standard 19" rack
- Reversible mounting tabs
- Designed for use with iHP and LCM4000 product families
- 100% digital control
- Intelligent zero current switching when used with Artesyn devices
- Digital communication via RS485 (Modbus-RTU)
- Cloud based user configurable GUI
- Natural convection cooled (No Fan)
- Field upgradeable firmware
- Up to 16 racks are addressable from one control Node
- Configurable baud rate
- MTBF 400K hours per Telecordia SR-332 Method 1 Case 3, Part Stress
- Product lifetime 10 years minimum

#### iTS Electrical Specifications – Housekeeping Power Supply Module

Parameter	Value
AC Input Voltage	90 to 264 VAC
AC Input Frequency	50/60 Hz Nominal
AC Input Fusing	Included for both input AC lines (Not user serviceable)
AC Inrush Current	Upon start-up from a "cold start", the maximum AC input current shall not exceed 50 A at 264 VAC 25C
Output to Relay Module	12 V @ 1 A per module; 3V3 as reference voltage ±1%

## ITS Electrical Specifications – Relay Module

Parameter	Value
Description	The relay is double break, capable for 25 A max continuous operation. Both output lines, positive and return, are switched. To prevent arcing, the relay is only switched when zero voltage / zero current is flowing through the contacts (Provided by master software control of the power source and Relay MCU.) The relay module shall support iHP modules with Nominal voltage rating of 125 VDC, 200 VDC and 250 VDC along with the 250 VAC output of the LCM4000HV. iHP modules connected in series for higher voltage output is allowed, but the load maybe derated so as Not to exceed the switching power rating of the relay
# Inputs	One per relay module, up to 8 can be loaded in a single 2U rack
Nominal Input Voltage	125 to 250 V
Input Current Max	25 A
Input Current Fault	>28 A

## Ordering Information

Model	Configuration
73-779-008	Fully configured, Rack with 8 relay modules
73-779-007	Rack with 7 relay modules
73-779-006	Rack with 6 relay modules
73-779-005	Rack with 5 relay modules
73-779-004	Rack with 4 relay modules
73-779-003	Rack with 3 relay modules
73-779-002	Rack with 2 relay modules
73-779-001	Rack with 1 relay module
73-779-000	Relay module only
73-779-TBD	Blank relay module



## LCM300

### Bulk Front End

300 W

#### SPECIAL FEATURES

- 300 W (350 W some models)
- Low cost
- 1.61 x 4.0 x 7.0 in
- 7.1 W/in<sup>3</sup>
- Industrial/Medical safety
- -40 to 70°C with derating
- Optional 5 V @ 2 A housekeeping
- High efficiency: 91% @ 230 VAC
- Variable speed "Smart Fans"
- DSP controlled
- PMBus™ compliant
- Conformal coat option
- ±20% adjustment range
- Margin programming (300 W and 600 W models)
- OR-ing FET
- EMI Class B
- EN61000 immunity
- RoHS 2

#### Total Power

300 W (350 W some models)

#### # of Outputs

Single

#### Output

12 to 60 V

Optional 5.0 V standby

#### Safety

- UL 62368-1 Ed 2
- 60601-1 Ed 3
- CSA 62368-1
- VDE 60950-1
- 60601
- China CCC
- CB Scheme Report/Cert

#### Electrical Specifications

##### Input

Input Range	90 to 264 VAC (Operating) (127 to 374 VDC) 115/230 VAC (Nominal) TERMINAL BLOCK
Frequency	47 to 63 Hz, Nominal 50/60
Input Fusing	Internal 8 A fuses, both lines fused
Inrush Current	≤ 20 A peak, either hot or cold start
Power Factor	0.98 typical, meets EN61000-3-2
Harmonics	Meets IEC 1000-3-2 requirements
Input Current	5 Arms max input current, @ 90 VAC
Hold up Time	20 ms minimum for Main O/P, @ full rated load
Efficiency	> 91% typical @ full Load/230 VAC Nominal
Leakage Current	< 0.3 mA @ 264 VAC
ON/OFF Power Switch	N/A
Power Line Transient	MOV directly after the fuse
Isolation	PRI-Chassis 2500 VDC Basic PRI-SEC 4000 VAC Reinforced 2xMOPP SEC-Chassis 500 VDC

Environmental Specifications	
Operating Temperature	-40 to +70°C, linear derating to 50% from 50 to 70°C
Storage Temperature	-40 to +85°C
Humidity	20 to 90%, Non-condensing. Operating, conformal coat option available
Fan Noise	< 45 dBA, 80% load @ 40°C; fan off when unit is inhibited
Altitude	Operating - 16,405 ft (5000 m) Storage - 30,000 ft
Shock	MIL-STD-810F 516.5, Procedure I, VI. storage
Vibration	MIL-STD-810F 514.5, Cat. 4, 10. storage

Electrical Specifications	
Output	
Output Rating	See ordering information table below
Set Point	±0.5%
Total Regulation Range	Main output ±2% 5 Vsb ±1%
Rated Load	310 W maximum
Minimum Load	Main output @ 0.0 A 5 Vsb @ 0.0 A
Output Noise (PARD)	1% max p-p 50 mV max p-p
Output Voltage Overshoot	—
Transient Response	< 300 µs
Max Units in Parallel	—
Short Circuit Protection	Protection against damage
Remote Sense	—
Output Isolation	—
Forced Load Sharing	To within 10% of all shared outputs
Over-Load Protection (OCP)	105% to 125% 120% to 170%
Over-Voltage Protection (OVP)	125% to 145% 110% to 125%
Over-Temperature Protection	10 to 15°C above safe operating area
	Both PFC and output converter monitored

Ordering Information									
Model Number <sup>1</sup>	Output	Nominal Output Voltage Set Point	Set Point Tolerance	Adjustment Range	Current Min	Max	Output Ripple P/P (0 to 50°C)	Max Continuous Power	Combined Line/Load Regulation
LCM300L	12 V	12 V	±0.5%	9.6 to 14.4 V	0 A	25 A	120 mV	310	2%
LCM300N	15 V	15 V	±0.5%	12.0 to 19.5 V	0 A	20 A	150 mV	310	2%
LCM300Q	24 V	24 V	±0.5%	19.2 to 28.8 V	0 A	12.5 A	240 mV	310	2%
LCM300U	36 V	36 V	±0.5%	28.8 to 43.2 V	0 A	8.4 A	360 mV	310	2%
LCM300W	48 V	48 V	±0.5%	38.4 to 57.6 V	0 A	6.3 A	480 mV	310	2%

<sup>1</sup> For option codes, see Data Sheet



## LCM600

### Bulk Front End 600 W

#### SPECIAL FEATURES

- 600 W output power
- Low cost
- 2.4 x 4.5 x 7.5 in
- 7.41 W/in<sup>3</sup>
- 5 V SELV standby (housekeeping)
- Industrial/Medical safety
- -40 to 70°C with derating
- 5 V housekeeping
- High efficiency: 89% typical
- Variable speed "Smart Fans"
- DSP controlled front end
- Conformal coat option
- ±20% adjustment range
- Margin programming
- OR-ing FET option
- Terminal block input option

#### Total Power

600 W

#### # of Outputs

Single

#### Output

9.6 to 60 V

Optional 5.0 V standby

#### Safety

- UL/CSA 62368-1  
60601-1
- TUV 62368-1  
60601-1
- China CCC
- CB Scheme Report/Cert

#### Electrical Specifications

Input	
Input Range	85 to 264 VAC (Operating) 115/230 VAC (Nominal) Input through standard IEC connector
Frequency	47 to 440 Hz, Nominal 50/60
Input Fusing	Internal 10 A fuses, both lines fused
Inrush Current	≤ 25 A peak, either hot or cold start
Power Factor	0.99 typical, meets EN61000-3-2
Harmonics	Meets IEC 1000-3-2 requirements
Input Current	8 A RMS max input current, at 100 VAC
Hold up Time	20 ms minimum for Main O/P, at full rated load
Efficiency	> 88% at full load
Leakage Current	< 0.3 mA at 264 VAC
ON/OFF Power Switch	N/A
Power Line Transient	MOV directly after the fuse

#### Environmental Specifications

Operating Temperature	-40 to +70°C, linear derating to 50% from 50 to 70°C
Storage Temperature	-40 to 85°C
Humidity	20 to 90%, Non-condensing. Operating. Conformal coat option available
Fan Noise	< 45 dBA, 80% load at 30°C
Altitude	Operating: Up to 16,405 ft above sea level Storage: Up to 30,000 ft above sea level
Shock	MIL-STD-810F 516.5, Procedure I, VI. Storage
Vibration	MIL-STD-810F 514.5, Cat. 4, 10. Storage

Electrical Specifications		
Output		
Output Rating	See ordering information table below	85 to 264 VAC
Set Point	$\pm 0.5\%$	85 to 264 VAC
Total Regulation Range	Main output $\pm 2\%$ 5 Vsb $\pm 1\%$	Combined line/load/transient when measured at output terminal
Rated Load	600 W maximum	Derate linear to 50% from 50 to 70°C
Minimum Load	Main output @ 0.0 A 5 Vsb @ 0.0 A	No loss of regulation
Output Noise (PARD)	1% max p-p 50 mV max p-p	Main output 5 Vsb output Measured with a 0.1 $\mu$ F ceramic and 10 $\mu$ F tantalum capacitor on any output, 20 MHz
Output Voltage Overshoot	—	No overshoot/undershoot outside the regulation band during on or off cycle
Transient Response	< 300 $\mu$ s	50% load step @ 1 A/ $\mu$ s Step load valid between 10% to 100% of output rating Recovery time to within 1% of set point at onset of transient
Max Units in Parallel	—	Up to 10
Short Circuit Protection	Protection against damage	Bounce mode
Remote Sense	—	Compensation up to 500 mV
Output Isolation	—	Standard per safety requirements
Forced Load Sharing	To within 10% of all shared outputs	Analog sharing control
Over-load Protection (OCP)	105% to 125% 120% to 170%	Main output 5 Vsb output. Constant current or bounce mode option through software
Over-voltage Protection (OVP)	125% to 145% 110% to 125%	12 V output 5 Vsb output
Over-temperature Protection	10 to 15°C above safe operating area	Both PFC and output converter monitored

Ordering Information								
Model Number <sup>1</sup>	Output	Nominal Output Voltage Set Point	Set Point Tolerance	Adjustment Range	Current Min	Max	Output Ripple P/P (0 to 50°C)	Combined Line/Load Regulation
LCM600L	12 V	12 V	$\pm 0.5\%$	9.6 to 14.4 V	0 A	54 A	120 mV	2%
LCM600N	15 V	15 V	$\pm 0.5\%$	12.0 to 19.5 V	0 A	44 A	150 mV	2%
LCM600Q	24 V	24 V	$\pm 0.5\%$	19.2 to 28.8 V	0 A	27 A	240 mV	2%
LCM600U	36 V	36 V	$\pm 0.5\%$	28.8 to 43.2 V	0 A	16.7 A	360 mV	2%
LCM600W	48 V	48 V	$\pm 0.5\%$	38.4 to 57.6 V	0 A	14 A	480 mV	2%

<sup>1</sup> For option codes, see Data Sheet



## LCM1000

### Bulk Front End

1000 W

#### SPECIAL FEATURES

- 1000 W output power
- Low cost
- 2.5 x 5.2 x 10.0 in
- 7.7 W/in<sup>3</sup>
- Industrial/Medical safety
- -40 to 70°C with derating
- Optional 5 V @ 2 A housekeeping
- High efficiency: 90% typical
- Variable speed "Smart Fans"
- DSP controlled
- Conformal coat option
- ±10% adjustment range
- Margin programming
- OR-ing FET
- Low acoustic Noise

#### Total Power

1000 W

#### # of Outputs

Single

#### Output

12 to 48 V

Optional 5.0 V standby

#### Safety

- ULcUL Recognized ITE (UL60950-1)
- ULcUL Recognized Medical (ANSI/AAMI ES60601-1)
- TUV-SuD ITE + Medical (EN60950-1 and EN60601-1)
- CE LVD (EN60950-1 + ROHS)
- BSMI
- CB Report
  - Through Demko for IEC60950-1
  - Through TUV-SuD for IEC60601-1
- CCC Approval

#### Electrical Specifications

##### Input

Input Range	90 to 264 VAC (Operating) 115/230 VAC (Nominal) TERMINAL BLOCK
Frequency	47 to 440 Hz, Nominal 50/60
Input Fusing	Internal 20 A fuses, both lines fused
Inrush Current	≤ 25 A peak, either hot or cold start
Power Factor	0.99 typical, meets EN61000-3-2
Harmonics	Meets IEC 1000-3-2 requirements
Input Current	12 A RMS max input current, at 100 VAC
Hold up Time	20 ms min for Main O/P, @ full rated load
Efficiency	> 90% typical @ full load / 230 VAC Nominal
Leakage Current	< 0.4 mA at 264 VAC
ON/OFF Power Switch	N/A
Power Line Transient	MOV directly after the fuse
Isolation	PRI-Chassis 2500 VDC Basic PRI-SEC 4000 VAC Reinforced 2xMOPP SEC-Chassis 500 VDC

#### Environmental Specifications

Operating Temperature	-20 to +70°C, linear derating to 50% from 50 to 70°C
Storage Temperature	-40 to +85°C
Humidity	20 to 90%, Non-condensing. Operating. Conformal coat option available
Fan Noise	< 45 dBA, 100% load at 30°C
Altitude	Operating - 16,405 ft (5000 m) Storage - 30,000 ft
Shock	MIL-STD-810F 516.5, Procedure I, VI. Storage
Vibration	MIL-STD-810F 514.5, Cat. 4, 10. Storage

Electrical Specifications		
Output		
Output Rating	See table 1	90 to 264 VAC
Set Point	±0.5%	90 to 264 VAC
Total Regulation Range	Main output ±2% 5 Vsb ±1%	Combined line/load/transient when measured at output terminal
Rated Load	1000 W maximum	Derate linear to 50% from 50 to 70°C
Minimum Load	Main output @ 0.0 A 5 Vsb @ 0.0 A	No loss of regulation
Output Noise (PARD)	1% max p-p 50 mV max p-p	Main output 5 Vsb output Measured with a 0.1 µF Ceramic and 10 µF Tantalum Capacitor on any output, 20 MHz
Output Voltage Overshoot	—	No overshoot/undershoot outside the regulation band during on or off cycle
Transient Response	< 300 µSec	50% load step @ 1 A/µs Step load valid between 10% to 100% of output rating Recovery time to within 1% of set point at onset of transient
Max Units in Parallel	—	Up to 10
Short Circuit Protection	Protected, No damage to occur	Bounce mode
Remote Sense	—	Compensation up to 500 mV
Output Isolation	—	Standard per safety requirements
Forced Load Sharing	To within 10% of all shared outputs	Analog sharing control
Over-load Protection (OCP)	105% to 125% 120% to 170%	Main output 5 Vsb output
Over-voltage Protection (OVP)	125% to 145% 110% to 125%	12 V output 5 Vsb output
Over-temperature Protection	10 to 15°C above safe operating area	Both PFC & output converter monitored

Ordering Information									
Model Number <sup>1</sup>	Output	Nominal Output Voltage Set Point	Set Point Tolerance	Adjustment Range	Current Min	Max	Output Ripple P/P (0 to 50°C)	Max Continuous Power	Combined Line/Load Regulation
LCM1000L	12 V	12 V	±0.5%	10.8 to 13.2 V	0 A	83.3 A	120 mV	1000 W	2%
LCM1000N	15 V	15 V	±0.5%	13.5 to 16.5 V	0 A	66.7 A	150 mV	1000 W	2%
LCM1000Q	24 V	24 V	±0.5%	21.6 to 26.4 V	0 A	41.7 A	240 mV	1000 W	2%
LCM1000U	36 V	36 V	±0.5%	32.4 to 39.6 V	0 A	27.8 A	360 mV	1000 W	2%
LCM1000W	48 V	48 V	±0.5%	43.2 to 52.8 V	0 A	20.8 A	480 mV	1000 W	2%

<sup>1</sup> For option codes, see Data Sheet



## LCM1500

### Bulk Front End

1500 W

#### SPECIAL FEATURES

- 1500 W output power
- Low cost
- 2.5 x 5.2 x 10.0 in
- 12 W per in<sup>3</sup>
- Industrial/Medical safety
- -40 to 70°C with derating
- Optional 5 V @ 2 A housekeeping
- High efficiency: 89% typical
- Variable speed "Smart Fans"
- DSP controlled
- Conformal coat option
- ±10% adjustment range
- Margin programming
- OR-ing FET
- Change to EMI Class A
- EN61000 immunity
- RoHS 2
- PMBUS

#### Total Power

1500 W

#### # of Outputs

Single

#### Output

12 to 60 V

Optional 5.0 V standby

#### Safety

- UL/CSA 62368-1  
60601-1
- TUV 62368-1  
60601-1
- CB Scheme Report/Cert

#### Electrical Specifications

##### Input

Input Range	90 to 264 VAC (Operating) 115/230 VAC (Nominal) TERMINAL BLOCK
Frequency	47 to 440 Hz, Nominal 50/60
Input Fusing	Internal 20 A fuses, both lines fused
Inrush Current	≤ 25 A peak, either hot or cold start
Power Factor	0.99 typical, meets EN61000-3-2
Harmonics	Meets IEC 1000-3-2 requirements
Input Current	18 Arms max input current, @ 100 VAC
Hold up Time	20 ms min for Main O/P, @ full rated load
Efficiency	> 91% typical @ full Load/230 VAC Nominal
Leakage Current	< 0.3 mA @ 264 VAC
ON/OFF Power Switch	N/A
Power Line Transient	MOV directly after the fuse
Isolation	PRI-Chassis 2500 VDC Basic PRI-SEC 2500 VDC Reinforced SEC-Chassis 500 VDC

#### Environmental Specifications

Operating Temperature	-40 to +70°C, linear derating to 50% from 50 to 70°C
Storage Temperature	-40 to +85°C
Humidity	20 to 90%, Non-condensing. Operating. Conformal coat option available
Fan Noise	< 45 dBA, 80% load @ 30°C
Altitude	Operating - 16,405 ft (5000 m) Storage - 30,000 ft
Shock	MIL-STD-810F 516.5, Procedure I, VI. Storage
Vibration	MIL-STD-810F 514.5, Cat. 4, 10. Storage

Electrical Specifications		
<b>Output</b>		
Output Rating	See ordering information table below	90 to 264 VAC
Set Point	±0.5%	90 to 264 VAC
Total Regulation Range	Main output ±2% 5 Vsb ±1%	Combined line/load/transient when measured at output terminal
Rated Load	1500 W maximum	Derate linear to 50% from 50 to 70°C
Minimum Load	Main output @ 0.0 A 5 Vsb @ 0.0 A	No loss of regulation
Output Noise (PARD)	1% max p-p 50 mV max p-p	Main output 5 Vsb output Measured with a 0.1 µF ceramic and 10 µF tantalum capacitor on any output, 20 MHz
Output Voltage Overshoot	—	No overshoot/undershoot outside the regulation band during on or off cycle
Transient Response	< 300 µs	50% load step @ 1 A/µs Step load valid between 10% to 100% of output rating Recovery time to within 1% of set point at onset of transient
Max Units in Parallel	—	Up to 10
Short Circuit Protection	Protection against damage	Bounce mode
Remote Sense	—	Compensation up to 500 mV
Output Isolation	—	Standard per safety requirements
Forced Load Sharing	To within 10% of all shared outputs	Analog sharing control
Over-load Protection (OCP)	105% to 125% 120% to 170%	Main output 5 Vsb output. Constant current or bounce mode option through software.
Over-voltage Protection (OVP)	125% to 145% 110% to 125%	12 V output 5 Vsb output
Over-temperature Protection	10 to 15°C above safe operating area	Both PFC and output converter monitored

Ordering Information									
Model Number <sup>1</sup>	Output	Nominal Output Voltage Set Point	Set Point Tolerance	Adjustment Range	Current Min	Max	Output Ripple P/P (0 to 50°C)	Max Continuous Power	Combined Line/Load Regulation
LCM1500L	12 V	12 V	±0.5%	10.8 to 13.2 V	0 A	133 A	120 mV	1500	2%
LCM1500N	15 V	15 V	±0.5%	13.5 to 16.5 V	0 A	100 A	150 mV	1500	2%
LCM1500Q	24 V	24 V	±0.5%	21.6 to 26.4 V	0 A	67 A	240 mV	1500	2%
LCM1500R	28 V	28 V	±0.5%	25.2 to 30.8 V	0 A	53.6 A	280 mV	1500	2%
LCM1500U	36 V	36 V	±0.5%	32.4 to 39.6 V	0 A	43 A	360 mV	1500	2%
LCM1500W	48 V	48 V	±0.5%	43.2 to 52.8 V	0 A	33 A	480 mV	1500	2%

<sup>1</sup> For option codes, see Data Sheet



## LCM3000

### Bulk Front End 3000 W

#### SPECIAL FEATURES

- 3000 W output power
- Low cost
- 2.5 x 7.0 x 10.9 in
- 15.7 W/in<sup>3</sup>
- Industrial/Medical safety
- -40 to 70°C with derating
- Optional 5 V @ 2 A housekeeping
- High efficiency: 91% typical
- Variable speed "Smart Fans"
- DSP controlled
- Conformal coat option
- ±25% adjustment range
- Margin programming
- VAR configurable to any voltage from a single unit
- Five-year warranty

#### Total Power

3000 W

#### # of Outputs

Single

#### Output

12 to 48 V

#### Safety

- UL/cUL Recognized ITE (UL60950-1)
- UL/cUL Recognized Medical (ANSI/AAMI ES60601-1)
- TUV-SuD ITE + Medical (EN60950-1 and EN60601-1)
- CE LVD (EN60950-1 + RoHS)
- CQC under GB17625.1, GB4943, GB9254
- CB Report
  - through Demko for IEC60950-1
  - through TUV-SuD for IEC60601-1
  - through DEMKO for IEC62368-1

#### Electrical Specifications

##### Input

Input Range	90 to 264 VAC (Operating) Derate to 1500 W below 180 VAC 115/230 VAC (Nominal) 129 to 370 VDC TERMINAL BLOCK
Frequency	47 to 440 Hz, Nominal 50/60
Input Fusing	Internal 30 A fuses, both lines fused
Inrush Current	≤ 35 A peak, @ 110 VAC & <60 A @ 230 VAC
Power Factor	0.99 typical, meets EN61000-3-2
Harmonics	Meets IEC 1000-3-2 requirements
Input Current	20 A RMS max input current, @ 100 VAC
Hold Up Time	14 ms min for Nominal output voltage, @ full rated load
Efficiency	> 91% typical @ full load / 230 VAC Nominal
Leakage Current	< 0.4 mA at 264 VAC
ON/OFF Power Switch	N/A
Power Line Transient	MOV directly after the fuse
Isolation	PRI-Chassis 2500 VDC Basic PRI-SEC 4000 VAC Reinforced 2xMOPP SEC-Chassis 500 VDC

#### Environmental Specifications

Operating Temperature	-40 to +70°C, linear derating to 50% from 50°C to 70°C. Operation at -40°C requires a 5 min operating warm-up @ -20°C
Storage Temperature	-40 to +85°C
Humidity	10 to 90%, Non-condensing, operating, conformal coat option available
Acoustic Noise	< TBD dBA, 80% load @ 30°C
Altitude	Operating - 16,405 ft (5000 m) Storage - 30,000 ft
Shock	MIL-STD-810F 516.5, Procedure I, VI
Vibration	MIL-STD-810F 514.5, Cat. 4, 10

Electrical Specifications		
Output		
Output Rating	See table 1	180 to 264 VAC
Set Point	$\pm 0.5\%$	90 to 264 VAC
Total Regulation Range	Main output $\pm 1\%$ 5 Vsb $\pm 5\%$	Combined line/load when measured at output terminal
Rated Load	3000 W maximum (Derate to 2000 W when input is <180 VAC)	Derate linear to 50% from 50 to 70°C
Minimum Load	Main output @ 0.0 A 5 Vsb @ 0.0 A	No loss of regulation
Output Noise (PARD)	1% max p-p 100 mV max p-p	Main output 5 Vsb output Measured with a 0.1 $\mu$ F Ceramic and 10 $\mu$ F Tantalum Capacitor on any output, 20 MHz
Output Voltage Overshoot	<3% of voltage setting must settle within 300 mSec	Rise is monotonic
Transient Response	< 300 $\mu$ Sec	50% load step @ 1 A/ $\mu$ s Step load valid between 10% to 100% of output rating Recovery time to within 1% of set point at onset of transient
Max Units in Parallel	—	Up to 8
Short Circuit Protection	Protected, No damage to occur	Bounce mode
Remote Sense	—	Compensation up to 500 mV
Output Isolation	—	Standard per safety requirements
Forced Load Sharing	To within 10% of all shared outputs	Digital sharing control
Over-load Protection (OCP) – Constant Current Mode	105% to 125% 120% to 170%	Main output 5 Vsb output
Over-voltage Protection (OVP)	125% to 145% 110% to 125%	12 V output 5 Vsb output
Over-temperature Protection	10 to 15°C above safe operating area	Both PFC and output converter monitored

Ordering Information								
Model Number	Nominal Output Voltage Set Point	Adjustment Range		Max I	Output Ripple P/P (0 to 50°C)	Combined Line/Load Regulation	Trim Range $\pm 25\%$	"Vprog Adjustment" 0 V to 6 V (20% to 125% Vout)
		Max I	Max Power (3000 W)					
LCM3000L-T	12 V	2.4 to 12 V	12 to 15 V	250 A	120 mV or 1%, whichever is higher	1%	9 to 15 V	2.4 to 15 V
LCM30008-T	18 V	3.6 to 18 V	18 to 22.5 V	166.7 A	180 mV or 1%, whichever is higher	1%	13.5 to 22.5 V	3.6 to 22.5 V
LCM3000Q-T	24 V	4.8 to 24 V	24 to 30 V	125 A	240 mV or 1%, whichever is higher	1%	18 to 30 V	4.8 to 30 V
LCM3000U-T	36 V	7.2 to 36 V	36 to 45 V	83.3 A	360 mV or 1%, whichever is higher	1%	27 to 45 V	7.2 to 45 V
LCM3000W-T	48 V	9.6 to 48 V	48 to 60 V	62.5 A	480 mV or 1%, whichever is higher	1%	36 to 60 V	9.6 to 60 V
LCM30007-T	72 V	14.4 to 72 V	72 to 90 V	41.7 A	720 mV or 1%, whichever is higher	1%	54 to 90 V	14.4 to 90 V

<sup>1</sup> Minimum Current is (0)

<sup>2</sup> Set Point Tolerance is  $\pm 0.5\%$

<sup>3</sup> Outputs above 60 VDC are Not SELV rated



#### Total Power

800 to 3000 W

#### # of Outputs

Single

#### Output

12 to 400 V

#### Safety

- UL 62368-1
- CSA 62368-1
- IEC/EN 62368-1
- CB Scheme Report/Cert

## TF Series

**Bulk Front End**  
800 to 3000 W

### SPECIAL FEATURES

- 800 W - TF800 series
- 1500 W - TF1500 series
- 3000 W - TF3000/TF3000HV series
- Industrial safety
- Universal AC input 90 to 264 VAC
- Selectable +5 V/0.5 A or +9 V/0.3 A auxiliary output
- Typical efficiency: 92% @ 230 VAC
- Variable speed "Smart Fans"
- -25 to 60°C with derating
- Programmable Output Voltage (0% to 105%)
- Forced current sharing at parallel operation
- Conformal coatint applied
- Constant Current Limit
- Remote setting multiple PSU via I<sup>2</sup>C & RS232 & RS485
- Power OK signal, remote ON/OFF, remote Sense function
- Protection: OVP, OLP, OTP, Fan Failure
- 3-year warranty
- RoHS compliant

### Electrical Specifications

#### Input

Input Range	90 to 264 VAC (Operating) (127 to 370 VDC) 115/230 VAC (Nominal) TERMINAL BLOCK
-------------	---

Frequency	47 to 63 Hz, Nominal 50/60
-----------	----------------------------

Power Factor	0.98 typical, meets EN61000-3-2
--------------	---------------------------------

Harmonics	Meets IEC 1000-3-2 requirements
-----------	---------------------------------

Input Current	5 Arms max input current, @ 90 VAC
---------------	------------------------------------

Hold up Time	20 ms minimum for Main O/P, @ full rated load
--------------	---

Efficiency	> 92% typical @ full Load/230 VAC Nominal
------------	---

Leakage Current	TF800: < 1 mA @ 240 VAC TF1500: < 2.5 mA @ 240 VAC TF3000: < 3.5 mA @ 240 VAC TF3000HV: < 3.5 mA @ 240 VAC
-----------------	---

Isolation	Input-Output 3000 VAC Input-Ground 1500 VAC Output-Ground 500 VAC
-----------	---

Environmental Specifications	
Operating Temperature	-25 to +60°C, linear derating to 50% from 50 to 60°C
Storage Temperature	-40 to +85°C
Humidity	20 to 90%, Non-condensing. Operating.
Vibration	10 to 500 Hz, 2 G 10 min./1 cycle, period for 60 min. each along X, Y, Z axes
Cooling	Load and temperature control fan

Ordering Information								
Model Number <sup>1</sup>	Output Voltage	Output Current	Output Power	Line Regulation	Load Regulation	Ripple & Noise P/P <sup>2</sup>	Voltage Tolerance <sup>3</sup>	Efficiency
TF800 Series								
TF800A12K	12 V	0 to 66.7 A	800 W	±1%	±1%	150 mV	±2%	89%
TF800A15K	15 V	0 to 53.4 A	800 W	±1%	±1%	150 mV	±2%	90%
TF800A24K	24 V	0 to 33.5 A	800 W	±1%	±1%	240 mV	±2%	92%
TF800A48K	48 V	0 to 16.7 A	800 W	±1%	±1%	480 mV	±2%	92%
TF800A60K	60 V	0 to 13.4 A	800 W	±1%	±1%	600 mV	±2%	93%
TF1500 Series								
TF1500A12K	12 V	0 to 125 A	1500 W	±1%	±1%	150 mV	±2%	89%
TF1500A15K	15 V	0 to 100 A	1500 W	±1%	±1%	150 mV	±2%	90%
TF1500A24K	24 V	0 to 62.5 A	1500 W	±1%	±1%	240 mV	±2%	92%
TF1500A48K	48 V	0 to 31.37 A	1500 W	±1%	±1%	480 mV	±2%	92%
TF1500A60K	60 V	0 to 25 A	1500 W	±1%	±1%	600 mV	±2%	93%
TF3000 Series								
TF3000A12K	12 V	0 to 200 A	2400 W	±1%	±1%	150 mV	±2%	88%
TF3000A15K	15 V	0 to 160 A	2400 W	±1%	±1%	150 mV	±2%	89%
TF3000A24K	24 V	0 to 125 A	3000 W	±1%	±1%	240 mV	±2%	91%
TF3000A48K	48 V	0 to 62.5 A	3000 W	±1%	±1%	480 mV	±2%	92%
TF3000A60K	60 V	0 to 50 A	3000 W	±1%	±1%	600 mV	±2%	93%
TF3000HV Series								
TF3000A150K	150 V	0 to 20 A	3000 W	±1%	±1%	1500 mV	±2%	93%
TF3000A200K	200 V	0 to 15 A	3000 W	±1%	±1%	2000 mV	±2%	93%
TF3000A250K	250 V	0 to 12 A	3000 W	±1%	±1%	2500 mV	±2%	93%
TF3000A300K	300 V	0 to 10 A	3000 W	±1%	±1%	3000 mV	±2%	93%
TF3000A400K	400 V	0 to 7.5 A	3000 W	±1%	±1%	4000 mV	±2%	93%

<sup>1</sup> Other output voltages available, consult factory.

<sup>2</sup> Ripple & noise are measured at 20 MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1 µF & 47 µF parallel capacitor.

<sup>3</sup> Tolerance: includes setup time tolerance, line regulation and load regulation.



## Total Power

LCM4000HV: 4000 W  
LCM12K: 12 kW

## Input Voltage

### LCM4000HV: Single Phase

187 to 264 VAC  
311 to 528 VAC

### LCM12K: Three Phase

187 to 229 VAC  
342 to 528 VAC  
540 to 660 VAC (WYE with Neutral)

## Output

### LCM4000HV:

Voltage source: 100 to 300 VDC  
Current source: 0 to 16 A

## Compliance

- EMI Class A
- EN61000 Immunity
- RoHS 3

## Safety

- UL 62368-1 Listed
- CSA 62368-1 Listed
- EN 62368-1 Listed
- IEC 62368-1 Listed
- CB Certificate and Report (IEC 62368-1/IEC 60950-1)
- CE (LVD+RoHS)

# LCM4000HV/LCM12K

**Hot-Swappable 4000 W Bulk Front End/12 kW Power Shelf  
Centralized Power for LED Horticulture Lighting, Burn-in, and Industrial Applications**

## SPECIAL FEATURES

- Wide input voltage range
- High efficiency: up to 95%
- Industrial safety
- Five-year warranty
- Low cost

### LCM4000HV:

- 4000 W output power
- 480 mm x 140 mm x 40.3 mm
- 24 W per cubic inch
- Variable speed "Smart Fans"
- Optional dust filter available

- DSP controlled
- Digital and analog communication
- Scales easily (Module/Shelf/Rack)
- Meets DLC 2.1 requirements
- Supports Artesyn iTS and IHLC

### LCM12K:

- Accepts 4 types of input configurations (Single phase high line 200 to 240 VAC, 3-PH delta 4W, 3-PH wye 4W, 3-PH wye 5 W)
- Houses three 4 kW power modules
- 446.3 mm x 504.3 mm x 43.7 mm

## Electrical Specifications

### Input - LCM4000HV

Input Range <sup>1</sup>	187 to 264 VAC 311 to 528 VAC
Frequency	47 to 63 Hz, Nominal 50/60 Hz
Input Fusing	Both lines fused
Inrush Current	< 60 A peak at 264 VAC, < 60 A peak at 528 VAC
Power Factor	0.99 at 100% load, at 208 VAC input 0.99 at 100% load, at 480 VAC input
Harmonics	Meets IEC 61000-3-12 requirements
Input Current	25 A max at 180 VAC
No Load Power	35 W max at 180 VAC
Efficiency	95.0% typical at 480 VAC input
Leakage Current	< 5 mA at 264/528 VAC, 60 Hz
Isolation Voltage	Primary to Protective Earth (PE) = 4000 VDC Primary to Secondary = 4000 VDC Secondary to Protective Earth (PE) = 3200 VDC Primary to User-Accessible = 6000 VDC Secondary to User-Accessible = 5000 VDC

### Input - LCM12K

Input Range <sup>1</sup>	187 to 264 (1-PH) 187 to 229 VAC (3-PH 4W) 342 to 528 VAC (3-PH 4W. Add Neutral for 600 VAC)
Input Current	70 A max single phase at 187 VAC 45 A max per phase at 180 VAC 25 A max per phase at 342 VAC

<sup>1</sup> Detailed input specifications please refer to ordering information section.

### Environmental Specifications

Operating Temperature	0°C to 50°C at 100% rated load, 50°C to 60°C derate to 3200 W
Storage Temperature	-40 °C to 85 °C
Operating Humidity	20% to 90% non condensing
Storage Humidity	10% to 95% non condensing
Operating Altitude	Up to 9,842 feet above sea level (3,000 meters)
Storage Altitude	Up to 30,000 feet above sea level (9,144 meters)
Shipping and Handling	NSTA for <100 lbs; MIL-STD-2073-1 >100 lbs
Cooling	Internal fan with variable speed control
Vibration and Shock	IEC068-2 / IEC721-3 Standard & Levels

### Ordering Information

#### LCM4000HV

Description	Model Number	Input Range	Default Output Setting <sup>1</sup>		
			Output Mode	Output Current	Output Voltage
Standalone 4 kW module	LCM4000HV-T-P	187 to 264 VAC	Current Source	0 A	250 VDC
	LCM4000HV-T-S	311 to 528 VAC	Current Source	0 A	250 VDC
Pluggable 4 kW module for shelf use	LCM4000HV-P-P	187 to 264 VAC	Current Source	0 A	250 VDC
	LCM4000HV-P-S	311 to 528 VAC	Current Source	0 A	250 VDC

<sup>1</sup> Output voltage and current adjustment range please refer to Electrical Specifications section.

#### LCM12K

Model Number	Description	Input Range
LCM12K-SHF-N	12 kW 250 V 1U shelf	High line, 600 VAC W/NEUTRAL
LCM12K-SHF-P	12 kW 250 V 1U shelf	Low line, 200/220/230/240 VAC
LCM12K-SHF-S	12 kW 250 V 1U shelf	High line, 380/480 VAC
LCM12K-BLK	1U blank filler panel	N/A



#### Total Power

FCM10K: 10 kW

FCM30K: 30 kW

#### Input Voltage

187 to 528 VAC Three Phase 3-Wire + PE

#### Output

Main output voltage: 54.5 VDC

Standby output: 5 V

#### Compliance

- EMI Class B
- EN61000 Immunity
- RoHS 3

#### Safety

- UL 62368-1
- CAN/CSA 62368-1
- EN 62368-1
- IEC 62368-1
- CB Certificate and Report (IEC 62368-1)
- CE (LVD+RoHS)

## FCM10K/FCM30K

**EVERGREEN™ VENTO™ 10 kW Bulk Front End Power Supply  
30 kW Power Shelf**

#### SPECIAL FEATURES

- Industrial safety
- Five-year warranty

##### FCM10K:

- 81.6 mm x 125.85 mm x 460 mm
- High efficiency: up to 97%
- Variable speed “Smart Fans”
- Digital and analog communication
- Scales easily (Module/Shelf/Rack)
- Supports NFC Tag application
- Semi F47 compliance

##### FCM30K:

- Houses three 10 kW power modules
- High efficiency: up to 95.5%
- 85.2 mm x 448 mm x 595 mm
- Supports Read-Only NFC Tag application
- Semi F47 compliance (Tested at 480 VAC, 54.5 VDC, 30 kW)

#### Electrical Specifications

Input Range	187 to 528 VAC (3-PH 4W)
Frequency	47 to 63 Hz, Nominal 50/60 Hz
Isolation Voltage	Meets UL62368 Primary to Protective Earth (PE) = 2500 VDC Primary to Secondary = 5000 VDC
Harmonics	Meets IEC 61000-3-12 requirements
Power Factor	0.98 at 100% load, at 208VAC input 0.97 at 100% load, at 480 VAC input
Harmonics	Meets IEC 61000-3-12 requirements
Output Trimming Range	48 to 60 VDC
Output Noise (PARD) <sup>1</sup>	Main output: 1% of voltage setting Standby: 100 mV max
Transient Response	±5% of nominal output voltage
<b>FCM10K</b>	
Input Current	15 A RMS max at 480 VAC
Inrush Current	< 60 A peak at 480 VAC
Input Fusing	Internal 20 A non-replaceable fuses per line
<b>FCM30K</b>	
Input Current	45 A RMS max at 480 VAC
Inrush Current	< 60 A peak at 480 VAC
Input Fusing	Recommend external circuit breaker with 63 A rating

<sup>1</sup> Measured with 0.1 µF ceramic and 10 µF electrolytic capacitor on any output, 20 MHz

**Environmental Specifications**

Operating Temperature	-40°C to 50°C, start at -40°C requires a 5 minute operating warm-up.
Storage Temperature	-40°C to 85°C
Operating Humidity	10% to 90% non condensing
Operating Altitude	Up to 9,842 feet above sea level (3,000 meters), full load

**Ordering Information****FCM10K**

Model Number	Nominal Output Voltage	Output Current	Standby Output	Efficiency	Description
FCM10KW-N-P	54.5 VDC	183.5 A	5 V at 2 A	96.3%	Pluggable Connector
FCM10KW-N-T	54.5 VDC	183.5 A	5 V at 2 A	96.3%	Terminal Block

**FCM30K**

Model Number	Nominal Output Voltage	Output Current	Standby Output	Efficiency	Description
FCM30KSHNW-PRM	54.5 VDC	550.5 A	5 V at 1 A	95.5%	Narrow Trim Shelf, Pluggable AC input version, MODBUS RTU with PMI
FCM30KSHNW-TRM	54.5 VDC	550.5 A	5 V at 1 A	95.5%	Narrow Trim Shelf, Terminal Block AC input version, MODBUS RTU with PMI
FCM30KSHNW-PRN	54.5 VDC	550.5 A	5 V at 1 A	95.5%	Narrow Trim Shelf, Pluggable AC input version, MODBUS RTU without PMI
FCM30KSHNW-TRN	54.5 VDC	550.5 A	5 V at 1 A	95.5%	Narrow Trim Shelf, Terminal Block AC input version, MODBUS RTU without PMI



## FCM33K

### EVERGREEN™ 33 kW 1OU Shelf AC-DC Power Converter

#### SPECIAL FEATURES

- Houses six 5.5 kW individual power modules
- Hot-swap capability
- Very high efficiency
- Industrial safety
- Accepts three-phase delta 4-wire input configuration
- Two AC feeds for each three units
- Hot-pluggable Power Management Module (PMM) for single shelf and multi-shelf communications and control
- Highly accurate droop + active current sharing
- 720 mm x 537 mm x 46 mm

#### Total Power

33 kW

#### Input Voltage

208 to 230 VAC Three Phase 4-Wire

#### Output

49 VDC

#### Compliance

- EMI Class A
- EN61000 Immunity
- RoHS 3

#### Safety

- UL 62368-1
- EN 62368-1
- IEC 62368-1
- CB Certificate and Report
- CE marking

#### TYPICAL APPLICATIONS

- Industrial
- Compute and storage
- Test and burn-in
- Any applications require reliable power and optional battery backup

#### Electrical Specifications

Input Range	180 to 264 VAC, (3P, 3-wire + PE), Line to Line
Efficiency	> 96% peak
Power Density	32 W/in <sup>3</sup>
Output Set Point	49.15 VDC at no load
Output Regulation	< 150 mV
Ripple & Noise	< 500 mVpp, measured with a 0.1 mF capacitor connected to the probe tip, 20 MHz BW

Environmental Specifications	
Operating Conditions	
Operating Temperature	-5°C to 45°C
Storage Temperature	-40°C to 70°C
Transportation Temperature	-55°C to 85°C (short-term storage)
Humidity	10% to 90% non condensing
Operating Altitude	Up to 10,000 feet above sea level (3,050 meters)
Gaseous Contamination	Severity Level G1 per ANSI/ISA 71.04-1985
Acoustic Noise	<85 dBA, fan running at full speed
Cooling	Internal fan with variable speed control
Vibration and Shock	EN 60068-2-6 and 60068-2-27

Ordering Information	
Model Number	Description
FCM33K-SHF-L-W-T	6 outputs, 1U shelf, AC-DC 3-Phase input
FCM5K5W-N-P	5.5 kW, AC-DC pluggable module 49.1 V/112 A



#### Total Power

12 to 144 kW

#### Input Voltage

Same as LCM12K

#### Output

Per PSU LCM4000HV:  
Voltage source: 100 to 300 VDC  
Current source: 0 to 16 A  
4000 W Maximum

#### Compliance

- EMI Class A
- EN61000 Immunity
- RoHS 3

#### Safety

- UL 62368-1
- EN 62368-1
- IEC 62368-1
- CB Certificate and Report
- CE marking

## LumaDrive

Pre-wired Systems including 24 kW (NEMA 3R enclosure), 36, 72, and 144 kW models for LED Horticulture Lighting, and Industrial Applications

#### SPECIAL FEATURES

- Wide input voltage range
- High efficiency: up to 95%
- Industrial safety
- Five-year warranty
- Low cost

LCM4000HV:

- 4000 W output power
- 480 mm x 140 mm x 40.3 mm
- Variable speed "Smart Fans"
- Optional dust filter available
- DSP controlled

- Digital and analog communication
- Scales easily (Module/Shelf/Rack)
- Meets DLC 2.1 requirements
- Supports Artesyn iTS and IHLC LCM12K:

- Accepts 3 types of input configurations (Single phase high line 200 to 240 VAC, 3-PH delta 4W, 3-PH wye 4W, 3-PH wye 5 W)
- Houses three 4 kW power modules
- Fits in a standard 19" rack, 1U

#### Electrical Specifications

##### Input - LCM4000HV

Input Range	180 to 264 VAC 311 to 528 VAC
Frequency	47 to 63 Hz, Nominal 50/60 Hz
Input Fusing	Both lines fused
Inrush Current	< 60 A peak at 264 VAC, < 60 A peak at 528 VAC
Power Factor	0.99 at 100% load, at 208 VAC input 0.99 at 100% load, at 480 VAC input
Harmonics	Meets IEC 61000-3-12 requirements
Input Current	25 A max at 180 VAC
No Load Power	35 W max at 180 VAC
Efficiency	95.0% typical at 480 VAC input
Leakage Current	< 5 mA at 264/528 VAC, 60 Hz
Isolation Voltage	Primary to Protective Earth (PE) = 4000 VDC Primary to Secondary = 4000 VDC Secondary to Protective Earth (PE) = 3200 VDC Primary to User-Accessible = 6000 VDC Secondary to User-Accessible = 5000 VDC

##### Input - LCM12K

Input Range	187 to 264 VAC (1-PH) 187 to 229 VAC (3-PH 4W) 342 to 528 VAC (3-PH 4W. Add Neutral for 600 VAC)
Input Current	70 A max single phase at 187 VAC 45 A max per phase at 180 VAC 25 A max per phase at 342 VAC

Environmental Specifications	
<b>Operating Conditions</b>	
Operating Temperature	0°C to 50°C at 100% rated load, 50°C to 60°C derate to 3200 W (per LCM4000HV output power)
Storage Temperature	-40 °C to 85 °C
Operating Humidity	20% to 90% non condensing
Storage Humidity	10% to 95% non condensing
Operating Altitude	Up to 9,842 feet above sea level (3,000 meters)
Storage Altitude	Up to 30,000 feet above sea level (9,144 meters)
Shipping and Handling	NSTA for <100 lbs; MIL-STD-2073-1 >100 lbs
Cooling	Internal fan with variable speed control
Vibration and Shock	IEC068-2 / IEC721-3 Standard & Levels

Ordering Information		
Model Number	Number of Shelves	Output Power
LMD02Uvv1L0240 <sup>1</sup>	2	24 kW
LMD06Uvv#w012z	1	12 kW
LMD06Uvv#w024z	2	24 kW
LMD06Uvv#w036z	3	36 kW
LMD10Uvv#w048z	4	48 kW
LMD10Uvv#w060z	5	60 kW
LMD10Uvv#w072z	6	72 kW
LMD14Uvv#w084z	7	84 kW
LMD14Uvv#w096z	8	96 kW
LMD14Uvv#w108z	9	108 kW
LMD18Uvv#w120z	10	120 kW

LMDxxxvv#wyyz-4xx Part Number Scheme							
xxx Cabinet Size	vv Input Voltage & Module Matched	# Cabinet Features	w Output Panel Options	yyy Total Power	z Number of PDUs Installed	4xx	
06U, 10U, 14U, 18U or 02U <sup>1</sup>	1P = 1-phase, -P module PP = 3-phase LL, -P module SS = 3-phase HL, -S module NS = 3-phase + Neutral, -S module	0 = Standard free standing 1 = NEMA 3R, wall mount 2 = Standard wall mount	L = Liquid tight (circular connector) K = Knock out holes G = Cable gland	e.g. 036, 072, 108, 144	e.g. 1, 2, 3, 4 0 = No PDU D = DIN rail option. Specify in -4xx	Special MOD	

Note 1 - 02U is for Greenhouse as below.





#### Total Power

- XS500 504 W
- XS1000 1008 W

#### Output Voltage

- 24, 36, 48
- 24, 36, 48

#### Safety

- IEC60601-1 2nd and 3rd edition
- IEC60601-1-2 4th edition (EMC)
- IEC60950 2nd edition
- 2 MOPP
- SEMI F47<sup>1</sup>
- MIL-STD-810G<sup>2</sup>

<sup>1</sup> SEMI F47 compliant at input voltages > 160 VAC.  
Consult Advanced Energy for details.

<sup>2</sup> Consult Advanced Energy for MIL810G report  
(enhanced ruggedisation available as an option).

## Xsolo

### Ultra-compact, High-efficiency 500 W and 1000 W Single Output Power Supplies

#### SPECIAL FEATURES

- Single output voltages are 24 V, 36 V, or 48 V with wide adjustment ranges and user-defined set-points
- Ultra high efficiency, > 92%

- Low profile: 1U height (40 mm)
- Convection-cooled 500 W
- Fan-cooled 1000 W (variable speed fan)

#### TYPICAL APPLICATIONS

- Industrial
- Test and measurement
- Acoustically sensitive laboratory and medical environments
- Hi-Rel MIL-COTS
- Communication

## Ordering Information

Model	Power (W)	Output Voltage (V)	Output Current (A)	Medical Approval UL/EN60601-1, 3rd Edition	Industrial Approval UL/EN60950, 2nd Edition
XS500-24	504	24	21.0	Yes	Yes
XS1000-24	1008	24	42.0	Yes	Yes
XS500-36	504	36	14.0	Yes	Yes
XS1000-36	1008	36	28.0	Yes	Yes
XS500-48	504	48	10.5	Yes	Yes
XS1000-48	1008	48	21.0	Yes	Yes

Model	Description	Set Point Adjust Range (V)	Dynamic Vtrim Range (V)	I <sub>max</sub> (A)	Remote Sense	Power Good
XS500-24	Convection-cooled U-channel	19 to 28	14 to 28	21.0	Yes	Yes
XS1000-24	Enclosed fan-cooled	19 to 28	14 to 28	42.0	Yes	Yes
XS500-36	Convection-cooled U-channel	26 to 40	20 to 40	14.0	Yes	Yes
XS1000-36	Enclosed fan-cooled	26 to 40	20 to 40	28.0	Yes	Yes
XS500-48	Convection-cooled U-channel	36 to 58	29 to 58	10.5	-	Yes
XS1000-48	Enclosed fan-cooled	36 to 58	29 to 58	21.0	Yes	Yes

## Environmental Specifications

Parameter	Conditions/Description	Min	NOM	Max	Units
Operating Temperature	-40	—	+70	—	°C
Storage Temperature	-40	—	+85	—	°C
Derating	See the designer's manual for full temperature deratings	—	—	—	—
Relative Humidity	Non-condensing	5	—	95	% RH
Shock and Vibration	Designed to meet MIL810 G <sup>1</sup>	—	55	—	G
Altitude	EN60601-1 Operational: 3000 m, Storage 8000 m	—	3000	—	m
	EN60950 Operational: 5000 m, Storage 8000 m	—	5000	—	m

<sup>1</sup> Consult Advanced Energy for MIL810G report (enhanced ruggedization available as an option)



## HPS

### Distributed Power Bulk Front End 3000 to 12000 W

#### SPECIAL FEATURES

- EN61000-3-2 harmonic compliance
- Built-in EMI filter
- Low output ripple
- +5 V standby output
- Built-in cooling fans
- N + 1 redundant
- Over-current protection
- Over-voltage protection
- Over-temperature protection
- Built-in OR-ing FETs
- Active power factor correction

#### Voltage Availability

Model	
Wattage	3000 W <sup>3</sup>
Input Voltage	90 to 140 VAC 180 to 264 VAC

#### Available Standard Output Voltages (order code)<sup>1</sup>

12 (L)	
24 (Q)	
28 (R)	
30 (S)	
48 (W)	•
54 (X)	
60 (Y)	
Available Options	See Note 1
Corresponding Rack	See Note 2

#### HPS3000 Electrical Specifications

##### Input

Input Range (Operating)	180 to 264 VAC 90 to 140 VAC
Input Range (Nominal)	200 VAC 110 VAC
Frequency	43 to 63 Hz
Input Fusing	Internal 25 A fuses (both lines fused)
Inrush Current	≤ 40 A peak (either hot or cold start)
Power Factor	0.97 typical (Meets EN61000-3-2)
Harmonics	Meets IEC 1000-3-2 requirements @ 50% load
Input Current	19 A max input current
Holdup Time	10 ms min @ full rated load
Leakage Current	1.4 mA @ 240 VAC
Power Line Transient	MOV directly after the fuse

<sup>1</sup> Consult factory for other output voltages and options

<sup>2</sup> Comes with optional I<sup>2</sup>C interface

<sup>3</sup> 3000 W @ 180 to 264 VAC; 1500 W @ 90 to 140 VAC

<sup>4</sup> 2000 W @ 48 V; 1300 W @ 24 V

## Environmental Specifications

## HPS3000

Operating Temp.	-10 to 40°C
Storage Temp.	-40 to 85°C
Cooling	External fans with Fan Fail and Fan Speed control
Humidity	Operating/Storage: 5 to 95% Non-condensing
Altitude	Operating: Up to 10,000 ft above sea level Storage: Up to 30,000 ft above sea level
Vibration/Shock	Non-operational 5G Sine sweep from 5 to 500 Hz, dwelling at resonant frequencies for one hour each
RoHS Compliant	Yes

## Output

Output Rating	48 V @ 62.0 A (180 to 264 VAC) 5 Vsb @ 3.0 A 48 V @ 29.4 A (90 to 140 VAC) 5 V @ 3 A
Set Point	-4% to +17% through I <sup>2</sup> C
Total Regulation Range	48 V ±10%; 5 Vsb ±4% (line/load/transient when measured at output connection)
Rated Load	3000 W max @ 200 VAC Input 1500 W max @ 110 VAC Input (No derating over operating temperature range)
Minimum Load	48 V @ 0.0 A; 5 Vsb @ 0.0 A with No loss of regulation
Output Noise	480 mV max P-P for 48 V output 100 mV max P-P for 5 Vsb output Measured with a 0.1F Ceramic and 10 F Tantalum capacitor on any input
Output Voltage Overshoot	±5% maximum of Nominal voltage setting
Transient Response	5% maximum deviation (50% load step @ 1 A/μs. Step load valid between 10 to 100% of output rating)
Max Units in Parallel	Up to 4 (total power in 1U 19" rack is 12 KW)
Short Circuit Protection	120 to 130% of rated output (output to return)
Forced Load Sharing	Within 10% of all shared outputs (digital sharing control)
Over-current Protection (OCP)	120 to 130% for 48 V output 100 to 125% for 5 Vsb output
Over-voltage Protection (OVP)	110 to 120% for 48 V output 110 to 125% for 5 Vsb output
Over-temperature Protection	10 to 15°C above safe operating area. (Both PFC and output converter monitored. 5 Vsb will operate under over-temperature condition. Built-in hysteresis.)

Rack Ordering Information<sup>1</sup>

Module	HPS3000
Rack #	HPR12K
# of Slots	4
Total Power	12000 W

<sup>1</sup> See website for option codes on HPR racks.

## Ordering Information

HPS3000-9-001	High airflow performance	HPR120K-00-001
HPS3000-9	Standard fans	HPR12K-00



#### Total Power

600 W

#### Input Voltage

100 to 240 V

#### # of Outputs

Single

#### Safety

- Conforms to UL 60950-1 and UL 62368-1
- Certified to CAN/CSA C22.2 No. 60950-1 & 62368-1

## iLS600 and iLS600-R Series

### Intelligent Laboratory Power 600 W Bench Programmable Power Supplies

#### SPECIAL FEATURES

- 600 W with extended range
- LXI certified
- 5 models: up to 400 V and 33 A
- Small, high-density 1U package

- Wireless digital remote sense
- Built-in voltage and current measurement
- Full OCP and OVP protection
- Series and parallel operation

#### APPLICATIONS

- Test and Measurement
- ATE
- Laboratory
- Research and Development

#### iLS600 and iLS600-R Series 600 W LXI Certified Programmable Power Supplies<sup>6</sup>

iLS600 Model:	iLS600-3 / iLS600-3-R	iLS600-5 / iLS600-5-R	iLS600-10 / iLS600-10-R	iLS600-20 / iLS600-20-R	iLS600-40 / iLS600-40-R
<strong>Output<sup>1</sup></strong>					
Voltage, Volts	30 V	50 V	100 V	200 V	400 V
Current, Amps	33 A	20 A	10 A	5 A	2.5 A
Power, Watts	600 W	600 W	600 W	600 W	600 W
<strong>Output Ripple &amp; Noise<sup>2</sup></strong>					
RMS Constant Voltage	20 mV	100 mV	150 mV	150 mV	50 mV
P-P Constant Voltage	60 mV	100 mV	100 mV	100 mV	200 mV
<strong>Regulation</strong>					
Load: 10-90% - Voltage	15 mV	25 mV	50 mV	100 mV	200 mV
Load: 10-90% - Current	15 mV	15 mV	15 mV	15 mV	15 mV
Line: 100-132 VAC Input <sup>2,3</sup> - Voltage	15 mV	25 mV	50 mV	100 mV	200 mV
Line: 100-132 VAC Input <sup>2,3</sup> - Current	15 mV	15 mV	15 mV	15 mV	15 mV
Line: 180-260 VAC Input <sup>2,3</sup> - Voltage	15 mV	25 mV	50 mV	100 mV	200 mV
Line: 180-260 VAC Input <sup>2,3</sup> - Current	15 mV	15 mV	15 mV	15 mV	15 mV

ILS600 and ILS600-R Series 600 W LXI Certified Programmable Power Supplies<sup>6</sup>

iLS600 Model:	iLS600-3 / iLS600-3-R	iLS600-5 / iLS600-5-R	iLS600-10 / iLS600-10-R	iLS600-20 / iLS600-20-R	iLS600-40 / iLS600-40-R
<b>Programming Accuracy<sup>1</sup></b>					
Voltage 0.1%+	15 mV	25 mV	50 mV	100 mV	200 mV
Current 0.1%+	66 mA	40 mA	20 mA	10 mA	5 mA
<b>Measurement Accuracy</b>					
Voltage 0.1%+	15 mV	25 mV	50 mV	100 mV	200 mV
Current 0.1%+	60 mA	40 mA	15 mA	10 mA	5 mA
<b>Transient Recovery Time<sup>3</sup></b>					
Time	≤1 ms	≤1 ms	≤1 ms	≤1 ms	≤1 ms
<b>Supplemental Characteristics*</b>					
Output response time (settle to within ±1% of the rated output, with a resistive load)					
Up, Full Load, Seconds	0.08 s	0.08 s	0.08 s	0.08 s	0.08 s
Down, Full Load, Seconds	0.08 s	0.08 s	0.08 s	0.08 s	0.08 s
Down, No Load, Seconds	0.50 s	0.50 s	0.50 s	0.50 s	0.50 s
Command Response Time <sup>4</sup> , Milliseconds	50 ms				
Data Readback Transfer Time <sup>5</sup> , Milliseconds	5 ms				
Remote Sense Compensation Volts/Load Lead	1 V	1 V	2 V	4 V	4 V
<b>Over-Voltage Protection</b>					
Range, Volts	0.5-33 V	0.5-55 V	0.5-110 V	0.5-220 V	0.5-440 V
Accuracy, Volts	0.3 V	0.5 V	1.0 V	2.0 V	4.0 V
Output Ripple and Noise <sup>2</sup> , CC rms, Milliamps	7 mA	5 mA	5 mA	5 mA	10 mA
Programming Resolution Voltage 0.05%+	10 mV	25 mV	50 mV	100 mV	200 mV
Measurement Resolution Current 0.05%+	20 mA	20 mA	10 mA	5 mA	2.5 mA
<b>Front Panel Display Accuracy</b>					
Voltage 0.1%+	10 mV	25 mV	50 mV	100 mV	200 mV
Current 0.1%+	33 mA	20 mA	10 mA	5 mA	2.5 mA
<b>Mechanical</b>					
Dimensions	Height 1.73 in. (44 mm) x Width 8.82 in. (224 mm) x Depth 10.30 in. (262 mm)				
Weight	6 lbs. (2.7 Kg)				

**1** Minimum voltage is guaranteed at greater than 1% of the rated output voltage. Minimum current is guaranteed at greater than 1% of the rated output current.

**2** Measured with 20 MHz bandwidth and excluding line frequency ripple (see application note AN024 for measurement details).

**3** Time for output voltage to recover within 0.5% of its rated output for a load change from 10 to 90% of its rated output current.

Voltage set point from 10% to 100% of rated output.

**4** Add this to the output reopens time to obtain the total programming time.

**5** Time to provide data back to the controller using LAN interface (does not include A/D conversion time).

**6** iLS600-R series come with rear ports.

\* Supplemental characteristics are not warranted but are descriptions of typical performance determined either by design or type testing.



## iLS1500 Series

### Intelligent Laboratory Power 1500 W Rack Programmable Power Supplies

#### SPECIAL FEATURES

- 1500 W with extended range
- LXI certified
- 5 models: up to 400 V and 70 A
- Small, high-density 1U package
- Wireless digital remote sense
- Built-in voltage and current measurement
- Full OCP and OVP protection
- Series and parallel operation

#### APPLICATIONS

- Test and Measurement
- ATE
- Laboratory
- Research and Development

#### Total Power

1500 W

#### Input Voltage

100 to 240 V

#### # of Outputs

Single

#### Safety

- Conforms to UL 60950-1 and UL 62368-1
- Certified to CAN/CSA C22.2 No. 60950-1 & 62368-1

#### iLS1500 Series 1500 W LXI Certified Programmable Power Supplies

iLS1500 Model:	iLS1500-3	iLS1500-5	iLD1500-10	iLS1500-20	iLS1500-40
<strong>Output<sup>1</sup></strong>					
Voltage, Volts	30 V	50 V	100 V	200 V	400 V
Current, Amps	70 A	40 A	20 A	10 A	5 A
Power, Watts <sup>6</sup>	1500 W	1500 W	1500 W	1500 W	1500 W
<strong>Output Ripple &amp; Noise<sup>2</sup></strong>					
RMS Constant Voltage	10 mV	20 mV	40 mV	80 mV	100 mV
P-P Constant Voltage	45 mV	75 mV	100 mV	200 mV	300 mV
<strong>Regulation</strong>					
Load: 10-90% - Voltage	0.05%	0.05%	0.05%	0.05%	0.05%
Load: 10-90% - Current	0.05%	0.05%	0.10%	0.05%	0.05%
Line (Change from 100 to 132 VAC Input or 180 to 260 VAC Input):					
Voltage	0.05%	0.05%	0.05%	0.05%	0.05%
Current	0.05%	0.05%	0.05%	0.05%	0.05%
<strong>Programming Accuracy<sup>1</sup></strong>					
Voltage	0.10%	0.15%	0.10%	0.10%	0.10%
Current	0.20%	0.15%	0.15%	0.15%	0.15%
<strong>Measurement Accuracy</strong>					
Voltage (0.1%+)	0.10%	0.15%	0.10%	0.10%	0.10%
Current (0.1%+)	0.20%	0.15%	0.15%	0.15%	0.15%
<strong>Transient Recovery Time<sup>3</sup></strong>					
Time	≤1.5 ms	≤1.5 ms	≤1.5 ms	≤1.5 ms	≤1.5 ms

## ILS1500 Series 1500 W LXI Certified Programmable Power Supplies

iLS1500 Model:	iLS1500-3	iLS1500-5	iLD1500-10	iLS1500-20	iLS1500-40
<b>Supplemental Characteristics*</b>					
Output response time (settle to within $\pm 1\%$ of the rated output, with a resistive load)					
Up, 10-90%, Milliseconds	15 ms	30 ms	25 ms	30 ms	35 ms
Down, 90-10%, Milliseconds	25 ms	25 ms	25 ms	45 ms	40 ms
Down, No Load, Seconds	<2.5 s	<3.0 s	<4.0 s	<10.0 s	<10.0 s
Command Response Time <sup>4</sup> , Milliseconds	50 ms				
Data Readback Transfer Time <sup>5</sup> , Milliseconds	5 ms				
Remote Sense Compensation Volts/Load Lead	1 V	1 V	2 V	4 V	4 V
<b>Over-Voltage Protection</b>					
Range, Volts	0.5-33 V	0.5-55 V	0.5-110 V	0.5-220 V	0.5-440 V
Accuracy, Volts	0.3 V	0.5 V	1.0 V	2.0 V	4.0 V
Output Ripple and Noise <sup>2</sup> , CC rms, Millamps	20 mA	10 mA	10 mA	5 mA	5 mA
Programming Resolution <sup>1</sup>	0.1%				
Measurement Resolution <sup>1</sup>	0.1%				
<b>Front Panel Display Accuracy</b>					
Voltage	0.10%	0.15%	0.15%	0.10%	0.10%
Current	0.20%	0.15%	0.10%	0.15%	0.15%
<b>Mechanical</b>					
Dimensions	Height 1.73 in. (44 mm) x Width 19.0 in. (483 mm) x Depth 15.5 in. (394 mm)				
Weight	12.8 lbs. (5.8 Kg)				

**1** Rating is percent of full scale. Rating is for operation between 10% of minimum voltage or current rating to 100% of voltage rating and the current rating at that voltage. Minimum voltage is guaranteed at greater than 1% of the rated output voltage. Minimum current is guaranteed at greater than 1% of the rated output current.

**2** Measured with 20 MHz bandwidth and excluding line frequency ripple (see application note AN024 for measurement details).

**3** Time for output voltage to recover within 0.5% of its rated output for a load change from 10 to 90% of its rated output current. Voltage set point from 10% to 100% of rated output.

**4** Add this to the output reopens time to obtain the total programming time.

**5** Time to provide data back to the controller using LAN interface (does not include A/D conversion time).

**6** 1500 W Output is only available with an AC input of 110 VAC or greater. With a lower AC line, output will be limited to 1100 W.

\* Supplemental characteristics are not warranted but are descriptions of typical performance determined either by design or type testing. Specifications subject to change without notice. Contact Versatile Power for full specifications and additional information.

## DISTRIBUTED AND M-CRPS/CRPS POWER

# Distributed and M-CPRS/CRPS Power Systems

**Data Center Front End Power**  
**AC and DC Inputs Available**  
**495 to 3600 W**



DS495SPE-3

Voltage Availability				
Model	12/12.2 V	24 V	54/55 V	PMBus
	(-3)	(-5)	(-9)	
DS495SPE	●			●
DS500SDC	●			●
DS750PED	●			●
DS1100PED	●			●
DS1100SDC	●			●
DS1100SLPE	●			●
DS1100TDC-3	●			●
DS1200	●			●
CSS1500FP-3	●			●
DS1600SPE	●			●
DS2000SPE	●			●
DS2400SPE	●			●
DS3000DC	●			●
DS3000TE	●			●
CSZ3200FT-9			●	●
CSU550AP-3	●			●
CSU800AP-3	●			●
CSU1300AP-3	●			●
CSU1800AP-3	●			●
CSU2000AP-3	●			●
CSU2400AP-3	●			●
CSU1600AT-3	●			●
CSU1800AT-3	●			●
CSU2000AT-3	●			●
CSU2400AT-3	●			●
CSU3200ET-3	●			●
M-CRPS CST1800AT-3	●			●
M-CRPS CSU2400AT-3	●			●
M-CRPS CSU3200AT-3	●			●
M-CRPS CSU3600AT-3	●		●	●

● Available

## SPECIAL FEATURES

- Active power factor correction
- EN61000-3-2 harmonic compliance
- Active AC inrush control
- High density
- Outputs +12 VDC with some +48 VDC models available
- 3.3 VDC standby
- 12.0 VDC standby on some models
- Options for 5 V standby voltage
- No minimum load required
- Hot plug operation
- N+1 redundant
- Internal OR-ing FETs
- Active current sharing
- Built-in cooling fans
- I<sup>2</sup>C Interface with EEPROM for FRU data
- Internal fan speed control with fan fail signal
- DC Input
- Options for reverse airflow
- Titanium efficiency on some models
- Platinum efficiency on some models

## Safety

UL	UL62368 (UL recognized)
NEMKO	EN62368
TÜV	EN62368
CE	Mark
CB	Report

Specifications				
	DS495SPE-3	DS500SDC-3	DS750PED-3	DS1100PED-3
<b>Input</b>				
Input Range	90 to 264 VAC	-36 to -72 VDC	90 to 264 VAC	90 to 264 VAC
Frequency	47 to 63 Hz	N/A	47 to 63 Hz	47 to 63 Hz
Efficiency	94% Typ Platinum	90% Typ	94% Typ	94% Typ
EMI/RFI	Class A	Class A	Class A	Class A
Leakage Current	1.0 mA	N/A	1.75 mA @ 240 V	1.75 mA @ 240 V
<b>Outputs</b>				
Output Main	12 V / 41.2 A	12 V / 41.6 A	12 V / 62.5 A	12 V / 91.67 A
Output Stand-By	12 V / 3.0 A	12 V / 3.0 A	12 V / 3 A	12 V / 3 A
OCP/OVP/OTP	Yes	Yes	Yes	Yes
I <sup>2</sup> C Control	Yes	Yes	Yes	Yes
<b>Environmental</b>				
Operating Temp	0 to 50°C	0 to 50°C	0 to 50°C	0 to 50°C
Derating	N/A	N/A	N/A	N/A
Storage	-40 to 70°C	-40 to 70°C	-40 to +70°C	-40 to +70°C
RoHS Compliant	Yes	Yes	Yes	Yes
MTBF	> 900k Hours	> 500k Hours	200k Hours	200k Hours
<b>Other</b>				
Size (in)	1.57 x 3.39 x 7.73 in	1.57 x 3.39 x 7.73 in	1.57 x 3.39 x 7.74 in	1.57 x 3.39 x 7.75 in
Size (mm)	40 x 86.3 x 196.5	40 x 86.3 x 196.5	41 x 86.3 x 196.5	42 x 86.3 x 196.5
Power Density	12.2	12.2	18.23	26.74
Cubic Inches	41.14	41.14	41.14	41.14
Pro-E Files	Yes	Yes	Yes	Yes
Thermal Data	Yes	Yes	Yes	Yes
PQ Airflow Curves	Yes	Yes	Yes	Yes
Warranty	Two Years	Two Years	Two Years	Two Years
<b>Ordering Codes</b>				
Standard	DS495SPE-3	DS500SDC-3	DS750PED-3	DS1100PED-3
ALT Standby				
Reverse Air	DS495SPE-3-001	DS500SDC-3-001	DS750PED-3-001	DS1100PED-3-001



DS500SDC-3



DS750PED-3



DS1100PED-3

## DISTRIBUTED AND M-CRPS/CRPS POWER

Specifications				
	DS1100SDC-3	DS1100SLPE-3	DS1100TDC-3	CSS1500FP-3
<b>Input</b>				
Input Range	-36 to -72 VDC	90 to 264 VAC	-40 to -72 VDC	90 to 264 VAC
Frequency	N/A	47 to 63 Hz	N/A	47 to 63 Hz
Efficiency	90% Typ	94% Typ	90% Typ	94% Typ
EMI/RFI	Class A	Class A	Class A	Class A
Leakage Current	N/A	1.75 mA	N/A	1.75 mA
<b>Outputs</b>				
Output Main	12 V / 91.67 A	12 V / 90 A	12 V / 91.67 A	12 V / 125 A
Output Stand-By	12 V / 3 A	3.3 V / 3 A	3.3 V / 3 A	3.3 V / 5 A
OCP/OVP/OTP	Yes	Yes	Yes	Yes
I <sup>2</sup> C Control	Yes	Yes	Yes	Yes
<b>Environmental</b>				
Operating Temp	0 to 50°C	0 to 50°C	0 to 50°C	0 to 55°C
Derating	N/A	60% at 65°C	N/A	N/A
Storage	-40 to 70°C	-40 to +85°C	-40 to 70°C	-40 to +85°C
RoHS Compliant	Yes	Yes	Yes	Yes
MTBF	> 200k Hours	300k Hours	> 300k Hours	300k Hours
<b>Other</b>				
Size (in)	1.57 x 3.39 x 7.75 in	1.57 x 2.15 x 12.66 in	1.57 x 2.14 x 12.67 in	1.57 x 2.15 x 12.66 in
Size (mm)	42 x 86.3 x 196.5	40 x 54.6 x 321.56	40 x 54.5 x 322.0	40 x 54.6 x 321.56
Power Density	26.7	25.7	25.8	35.1
Cubic Inches	41.14	42.73	42.57	42.73
Pro-E Files	Yes	Yes	Yes	Yes
Thermal Data	Yes	Yes	Yes	Yes
PQ Airflow Curves	Yes	Yes	Yes	Yes
Warranty	Two Years	Two Years	Two Years	Three Years
<b>Ordering Codes</b>				
Standard	DS1100SDC-3	DS1100SLPE-3	DS1100TDC-3	CSS1500FP-3-100
ALT Standby				
Reverse Air	DS1100SDC-3-001	DS1100SLPE-3-001	DS1100TDC-3-001	CSS1500FP-3-101
ALT Standby & Reverse Air				



DS1100TDC-3



CSS1500FP-3

Specifications		DS1600SPE-3	DS2000SPE-3	DS2400SPE-3
<b>Input</b>				
Input Range	180 to 264 VAC	90 to 140 VAC/180 to 264 VAC	90 to 140 VAC/180 to 264 VAC	90 to 140 VAC/180 to 264 VAC
Frequency	47 to 63 Hz	47 to 63 Hz	47 to 63 Hz	47 to 63 Hz
Efficiency	94% Typ	94% Typ Platinum	94% Typ Platinum	94% Typ Platinum
EMI/RFI	Class A	Class A	Class A	Class A
Leakage Current	1.75 mA @ 240 V	0.75 mA	0.6 mA	0.6 mA
<b>Outputs</b>				
Output Main	12 V / 133.3 A <sup>1</sup>	12 V / 163.9 A <sup>1</sup>	12.2 V / 196.7 A <sup>1</sup>	12.2 V / 196.7 A <sup>1</sup>
Output Stand-By	12 V / 4.5 A	12 V / 3.5 A	12 V / 3.5 A	12 V / 3.5 A
OCP/OVP/OTP	Yes	Yes	Yes	Yes
I <sup>2</sup> C Control	Yes	Yes	Yes	Yes
<b>Environmental</b>				
Operating Temp	0 to 50°C	0 to 50°C	0 to 50°C	0 to 50°C
Derating	70% at 60°C	N/A	70% at 60°C	70% at 60°C
Storage	-40 to +85°C	-40 to 70°C	-40 to 70°C	-40 to 70°C
RoHS Compliant	Yes	Yes	Yes	Yes
MTBF	200k Hours	> 500k Hours	500k Hours	500k Hours
<b>Other</b>				
Size (in)	1.57 x 3.39 x 7.76 in	1.57 x 3.39 x 7.75 in	1.57 x 3.39 x 7.75 in	1.57 x 3.39 x 7.75 in
Size (mm)	40 x 86.3 x 196.5	40 x 86.3 x 196.5	40 x 86.3 x 196.5	40 x 86.3 x 196.5
Power Density	38.89	48.6	58.2	58.2
Cubic Inches	41.14	41.14	41.14	41.14
Pro-E Files	Yes	Yes	Yes	Yes
Thermal Data	Yes	Yes	Yes	Yes
PQ Airflow Curves	Yes	Yes	Yes	Yes
Warranty	Two Years	Two Years	Two Years	Two Years
<b>Ordering Codes</b>				
Standard	DS1600SPE-3	DS2000SPE-3	DS2400SPE-3	DS2400SPE-3
ALT Standby				DS2400SPE-3-001
Reverse Air	DS1600SPE-3-001	DS2000SPE-3-001		
ALT Standby & Reverse Air				

<sup>1</sup> Low line derating will apply



DS2000SPE-3



DS2400SPE-3

## DISTRIBUTED AND M-CRPS/CRPS POWER

Specifications			
	DS3000DC-3	DS3000TE-3	CSZ3200FT-9
<b>Input</b>			
Input Range	-40 to -72 VDC	208 to 264 VAC	90 to 264 VAC
Frequency	N/A	47 to 63 Hz	47 to 63 Hz
Efficiency	90% Typ	96% Typ Titanium	96% Typ Titanium
EMI/RFI	Class A	Class A	Class A
Leakage Current	N/A	0.75 mA	1.75 mA
<b>Outputs</b>			
Output Main	12 V / 248 A	12 V / 250 A	55 V / 58 A
Output Stand-By	12 V / 4.5 A	12 V / 4.5 A	3.4 V / 3 A
OCP/OVP/OTP	Yes	Yes	Yes
I <sup>2</sup> C Control	Yes	Yes	Yes
<b>Environmental</b>			
Operating Temp	0 to 40°C	0 to 40°C	-5 to 45°C
Derating		25% at 50°C	25% at 50°C
Storage	-40 to 70°C	-40 to 85°C	-40 to 85°C
RoHS Compliant	Yes	Yes	Yes
MTBF	> 400k Hours	400k Hours	150k Hours
<b>Other</b>			
Size (in)	4.15 x 2.78 x 11.8	4.15 x 2.78 x 11.12	3.95 x 1.58 x 14.55
Size (mm)	105.5 x 70.6 x 299.7	105.5 x 70.6 x 282.6	100.3 x 40.13 x 369.5
Power Density	22.0	26.26	35.25
Cubic Inches	136	114.23	90.8
Pro-E Files	Yes	Yes	Yes
Thermal Data	Yes	Yes	Yes
PQ Airflow Curves	Yes	Yes	Yes
Warranty	Two Years	Two Years	Two Years
<b>Ordering Codes</b>			
Standard	DS3000DC-3	DS3000TE-3	CSZ3200FT-9-100
ALT Standby			
Reverse Air	DS3000DC-3-001	DS3000TE-3-001	CSZ3200FT-9-101
ALT Standby & Reverse Air			



DS3000DC-3

Specifications						
	CSU550AP-3	CSU800AP-3	CSU1300AP-3	CSU1800AP-3	CSU2000AP-3	CSU2400AP-3
<b>Input</b>						
Input Range	90 to 264 VAC	90 to 264 VAC				
Frequency	47 to 63 Hz	47 to 63 Hz				
Efficiency	94% Typ Platinum	94% Typ Platinum				
EMI/RFI	Class A	Class A				
Leakage Current	0.85 mA	1.75 mA	1.75 mA	0.6 mA	0.6 mA	0.6 mA
<b>Outputs</b>						
Output Main	12 V / 45.0 A	12 V / 66.7 A	12.2 V / 108.3 A	12.2 V / 147.5 A	12.2 V / 163.9 A <sup>1</sup>	12.2 V / 196.7 A
Output Stand-By	12 V / 2.5 A	12 V / 2.5 A	12 V / 3.5 A	12 V / 3.5 A	12 V / 3.5 A	12 V / 3.5 A
OCP/OVP/OTP	Yes	Yes	Yes	Yes	Yes	Yes
I <sup>2</sup> C Control	Yes	Yes	Yes	Yes	Yes	Yes
<b>Environmental</b>						
Operating Temp	0 to 50°C	0 to 50°C	0 to 55°C	0 to 55°C	0 to 55°C	0 to 55°C
Derating						
Storage	-40 to 70°C	-40 to 70°C	-40 to 70°C	-40 to 70°C	-40 to 60°C	-40 to 70°C
RoHS Compliant	Yes	Yes	Yes	Yes	Yes	Yes
MTBF	> 250k Hours	> 250k Hours				
<b>Other</b>						
Size (in)	1.57 x 2.89 x 7.28 in	1.57 x 2.89 x 7.28 in				
Size (mm)	40 x 73.5 x 185	40 x 73.5 x 185				
Power Density	16.7	16.7	40.6	56	62.6	75
Cubic Inches	33	33	33	33	33	33
Pro-E Files	Yes	Yes	Yes	Yes	Yes	Yes
Thermal Data	Yes	Yes	Yes	Yes	Yes	Yes
PQ Airflow Curves	Yes	Yes	Yes	Yes	Yes	Yes
Warranty	Two years	Two years				
<b>Ordering Codes</b>						
Standard	CSU550AP-3	CSU800AP-3	CSU1300AP-3	CSU1800AP-3-100	CSU2000AP-3-100 <sup>2</sup> CSU2000AP-3-200 <sup>3</sup>	CSU2400AP-3-100
ALT Standby						
Reverse Air	CSU550AP-3-001	CSU800AP-3-001	CSU1300AP-3-001	CSU1800AP-3-111	CSU2000AP-3-111 <sup>2</sup> CSU2000AP-3-211 <sup>3</sup>	CSU2400AP-3-111

<sup>1</sup> Low line derating will apply<sup>2</sup> IEC C14 AC inlet<sup>3</sup> IEC C20 AC inlet

CSU800AP-3



CSU2000AP-3



CSU2400AP-3

## DISTRIBUTED AND M-CRPS/CRPS POWER

Specifications						
	CSU1300ADC-3	CSU2000ADC-3	CSU1600AT-3	CSU1800AT-3	CSU2000AT-3	CSU2400AT-3
<b>Inputs</b>						
Input Range	-40 to -72 VDC	-40 to -72 VDC	90 to 264 VAC	90 to 264 VAC	90 to 264 VAC	180 to 264 VAC
Frequency	N/A	N/A	47 to 63 Hz	47 to 63 Hz	47 to 63 Hz	47 to 63 Hz
Efficiency	>90% Typ	94% Typ	96% Typ Titanium	96% Typ Titanium	96% Typ Titanium	96% Typ Titanium
EMI/RFI	Class A	Class A				
Leakage Current	N/A	N/A	0.6 mA	0.6 mA	0.6 mA	0.75 mA
<b>Outputs</b>						
Output Main	12.2 V / 106.5 A	12.2 V / 163.9 A	12.2 V / 131.1 A	12.2V / 147.5 A	12.2V / 163.9 A <sup>1</sup>	12.2V / 196.7 A
Output Stand-By	12 V / 3.5 A	12 V / 3.5 A	12 V / 3.5 A	12V / 3.5 A	12V / 3.5 A	12V / 3.5 A
OCP/OVP/OTP	Yes	Yes	Yes	Yes	Yes	Yes
I <sup>2</sup> C Control	Yes	Yes	Yes	Yes	Yes	Yes
<b>Environmental</b>						
Operating Temp	-5 to 55°C	-5 to 55°C	-5 to 65°C	-5 to 65°C	-5 to 65°C	-5 to 55°C
Derating						
Storage	-40 to 70°C	-40 to 70°C				
RoHS Compliant	Yes	Yes	Yes	Yes	Yes	Yes
MTBF	>250k Hours	>250k Hours	>700k Hours	> 700k Hours	> 700k Hours	> 700k Hours
<b>Other</b>						
Size (inch)	1.57 x 2.89 x 7.28	1.57 x 2.89 x 7.28				
Size (mm)	40 x 73.5 x 185	40 x 73.5 x 185				
Power Density	40.6	62.6	48.5	56	62.6	75
Cubic Inches	33	33	33	33	47.3	33
Pro-E Files	Yes	Yes	Yes	Yes	Yes	Yes
Thermal Data	Yes	Yes	Yes	Yes	Yes	Yes
PQ Airflow Curves	Yes	Yes	Yes	Yes	Yes	Yes
Warranty	Two years	Two years				
<b>Ordering Codes</b>						
Standard	CSU1300ADC-3-100	CSU2000ADC-3-100	CSU1600AT-3-100	CSU1800AT-3-100	CSU2000AT-3-100	CSU2400AT-3-100
ALT Standby						
Reverse Air	CSU1300ADC-3-101	CSU2000ADC-3-101				

<sup>1</sup> Low line derating will apply.



CSU2000ADC-3

Specifications					
	CSU3200ET-3	M-CRPS CST1800AT-3	M-CRPS CSU2400AT-3	M-CRPS CSU3200AT-3	M-CRPS CSU3600AT-3
<b>Inputs</b>					
Input Range	90 to 264 VAC	180 to 264 VAC	90 to 264 VAC	90 to 264 VAC	90 to 264 VAC
Frequency	47 to 63 Hz	47 to 63 Hz	47 to 63 Hz	47 to 63 Hz	47 to 63 Hz
Efficiency	96% Typ Titanium	96% Typ Titanium	96% Typ Titanium	96% Typ Titanium	96% Typ Titanium
EMI/RFI	Class A	Class A	Class A	Class A	Class A
Leakage Current	0.6 mA	0.6 mA	0.6 mA	0.6 mA	0.6 mA
<b>Outputs</b>					
Output Main	12.2 V / 262.3 A <sup>1</sup>	12.2 V / 147.5 A	12.2 V / 196.7 A <sup>1</sup>	12.2 V / 262.3 A <sup>1</sup>	54 V / 66.7 A <sup>1</sup>
Output Stand-By	12 V / 3.5 A	12 V / 3.5 A	12 V / 3.5 A	12 V / 3.5 A	12 V / 3 A
OCP/OVP/OTP	Yes	Yes	Yes	Yes	Yes
I <sup>2</sup> C Control	Yes	Yes	Yes	Yes	Yes
<b>Environmental</b>					
Operating Temp	0 to 55°C	-5 to 55°C	-5 to 55°C	-5 to 55°C	0 to 55°C
Derating					
Storage	-40 to 70°C	-40 to 70°C	-40 to 70°C	-40 to 70°C	-40 to 70°C
RoHS Compliant	Yes	Yes	Yes	Yes	Yes
MTBF	> 500k Hours	> 400k Hours	> 400k Hours	> 400k Hours	> 500k Hours
<b>Other</b>					
Size (inch)	1.57 x 2.89 x 10.43	1.57 x 2.36 x 7.28	1.57 x 2.89 x 7.28	1.57 x 2.89 x 7.28	1.57 x 2.89 x 7.28
Size (mm)	40 x 73.5 x 265	40 x 60 x 185	40 x 73.5 x 185	40 x 73.5 x 185	40 x 73.5 x 185
Power Density	68	67	75	62.6	110
Cubic Inches	47.3	27	33	33	33
Pro-E Files	Yes	Yes	Yes	Yes	Yes
Thermal Data	Yes	Yes	Yes	Yes	Yes
PQ Airflow Curves	Yes	Yes	Yes	Yes	Yes
Warranty	Two years	Two years	Two years	Two years	Two years
<b>Ordering Codes</b>					
Standard	CSU3200ET-3-100	CST1800AT-3-3M0	CSU2400AT-3-3M0	CSU3200AT-3-3M0	CSU3600AT-9-3M0
ALT Standby					
Reverse Air					

<sup>1</sup> Low line derating will apply



CSU2400AT-3-3M0



## 50 V, 18 kW, 1OU Open Rack Power Shelf 15 kW N+1

### SPECIAL FEATURES

- 15 kW at 50 V with N + 1 redundancy or 9 kW at 50V with N + N redundancy (dual feed shelf)
- Highly accurate droop + active current sharing
- Very high efficiency
- Accepts 3 types of input configurations (3P Delta 4 W, 3P Wye 5 W, 3x of 1P)
- Black box fault recording

### Electrical Specifications

	MIN	NOM	MAX
<b>Input</b>			
Voltage (3 phase Delta 4 wire) VAC	180	200/277	305
Voltage (3 phase Wye 5 wire) VAC	360	380/480	528
Voltage (3x of 1 phase ) VAC	180	200/277	305
<b>Output</b>			
Set Point VDC ( 50% Load )	50.625	50.75	50.875
Current A	0		300
Ripple & Noise (@ 20MHz BW) mVpp			500
Output Excursion (from nominal voltage) During Transient Loading V <sup>1,2</sup>	-1		+1

### Compliance

EN 61000-4-2 Cat-A for surges
EN 61000-3-2 Class-A for harmonics
EN55022, FCC Part 15, CISPR 22, Class-A for EMC

### Ordering Information

Model	Description
700-015746-0100	Standard ORv3 Power Shelf – Single Whip
700-015235-0100	Standard ORv3 Power Shelf – Dual Whip

### Related Products

Model	Description
700-015234-0100	Standard ORv3 PSU
700-015798-0000	Standard ORv3 Power Management Controller
700-015718-0000	Standard ORv3 PMI

<sup>1</sup> Max Current Step: 10% to 50%, 50% to 10%  
<sup>2</sup> Slew Rate: 1A/uS



## 50 V, 3 kW, Open Rack Rectifier

### For 18 kW & 36 kW Open Rack V3 Power Shelves

#### SPECIAL FEATURES

- Greater than 96.5% efficiency from 240 to 277 V AC input with 30-100% load (peak efficiency of 97.5%)
- 200 to 277 VAC input
- Active to active + droop current sharing
- OCP compliant
- Hot pluggable PSUs
- Status LEDs for fault monitoring
- 48 V fixed on battery test operation

#### Electrical Specifications

	MIN	NOM	MAX
<b>Input</b>			
Voltage VAC	180	200/277	305
Hold up (@100% Load 200 to 277 VAC) ms		20	
iTHD (Load >30%) %			5
Power Factor (10 to 30% loading) %	95		
Power Factor (30 to 100% loading) %	97		
Power Factor (above 50% loading) %	98		
<b>Output</b>			
Set Point VDC (50% Load)	50.625	50.75	50.875
Battery Testing Voltage (V)		48	
Current A	0		60
Ripple & Noise (@ 20MHz BW) mVpp			500
Output Excursion (from nominal voltage) During Transient Loading mV <sup>1, 2, 3</sup>	-1		+1

#### Compliance

IEC EN 61000-4-2 Cat-A for surges

EN 61000-3-2 Class-A for harmonics

CISPR and FCC Part A for EMC

#### Ordering Information

Model	Description
700-015234-0100	Standard ORv3 PSU

#### Related Products

Model	Description
700-015746-0100	Standard ORv3 Power Shelf – Single Whip
700-015235-0100	Standard ORv3 Power Shelf – Dual Whip
700-015798-0000	Standard ORv3 Power Management Controller
700-015718-0000	Standard ORv3 PMI



## 50 V, 33 kW, 1OU Open Rack HPR Power Shelf

27.5 kW N+1

### SPECIAL FEATURES

- 27.5 kW at 50 V with N + 1 redundancy or 16.5 kW at 50V with N + N redundancy (dual feed shelf)
- Highly accurate droop + active current sharing
- Very high efficiency
- Accepts 3P Wye 5-Wire input configuration
- Black box fault recording

### Electrical Specifications

	MIN	NOM	MAX
<b>Input</b>			
Voltage (3 phase Wye 5 wire) VAC	360	380/480	528
<b>Output</b>			
Set Point VDC ( 0% Load )			50
Set Point VDC ( 100% Load )	49		
Current A	0		674
Ripple & Noise (@ 20MHz BW) mVpp			500

### Compliance

EN 61000-4-2 for surges
EN 61000-3-12 for harmonics
EN55022, FCC Part 15, CISPR 22, Class-A for EMC

### Ordering Information

Model	Description
700-037148-0100	Standard ORv3 HPR Power Shelf – Dual Whip

### Related Products

Model	Description
700-037147-0100	Standard ORv3 HPR 5.5 kW PSU
700-055176-0000	Standard ORv3 HPR PMC
700-037149-0100	Standard ORv3 HPR PMI
700-043397-0100	Standard ORv3 HPR PMM



## 50 V, 5.5 kW, Open Rack HPR Rectifier For 33 kW Open Rack V3 HPR Power Shelves

### SPECIAL FEATURES

- Greater than 96.5% efficiency for 277 VAC input with 30-100% load (peak efficiency of 97.5%)
- 180 to 305 VAC input
- Active + droop current sharing
- OCP compliant
- Hot pluggable PSUs
- Modbus communications
- Black box fault logging

### Electrical Specifications

	MIN	NOM	MAX
<b>Input</b>			
Voltage VAC	180	200/277	305
Hold up (@100% Load 200 to 277 VAC) ms		20	
Maximum Output Power (W) Vin >= 198Vac Vin <= 195Vac			5.5 4.5
<b>Output</b>			
Set Point VDC (100% Load)	48.875	49	48.125
Current A	0		113
Ripple & Noise (@ 20MHz BW) mVpp			500
Regulation and Characteristics VDC <sup>1</sup>	49		50

<sup>1</sup> The rectifier droop voltage (0% to 100%) is 1 V by default (with the tolerance of  $\pm 0.125$  V). That means output voltage is 49 V at 100% load and 50 V at no-load. The droop extends linearly to 150% (it means at 150%, the droop is 1.5 V, and voltage is 48.5 V).

### Compliance

IEC EN 61000-4-5 Cat-A for surges

EN 61000-3-2 Class-A for harmonics

CISPR and FCC Part A for EMC

### Ordering Information

Model	Description
700-037147-0100	Standard ORv3 HPR 5.5 kW PSU

### Related Products

Model	Description
700-037148-0100	Standard ORv3 HPR Power Shelf – Dual Whip



## 48 V, 30 kW, 2U EIA Power Shelf 30 kW N+2

### SPECIAL FEATURES

- 30 kW N+2 at 48 V with active + droop current sharing
- Houses 12 x 3 kW power modules and a removable shelf controller
- Designed for dual AC feeds, Automatic Transfer Switch (ATS) PSUs
- Very high efficiency
- Accepts 3 types of input configurations (3P Delta 4 W, 3P Wye 5 W, 3x of 1P)

### Total Output Power

30 kW N+2

### Safety

- EN 62368-1
- UL 62368-1
- IEC 62368-1

### Electrical Specifications

	MIN	NOM	MAX
<b>Input</b>			
Voltage (3 phase Delta 4 Wire) VAC	180	200/277	305
Voltage (3 phase Wye 5 Wire) VAC	360	380/480	528
Voltage (3x of 1 phase) VAC	180	200/277	305
<b>Output</b>			
Set Point VDC (20% load)	49.65 V	49.7 V	49.75 V
Droop (0~100% load)		-1.5 V	
Current A			620
Ripple & Noise (@ 20MHz BW) mVpp			500
Output Excursion (from Nominal voltage) During Transient Loading V <sup>1, 2, 3</sup>	-1		+1

### Compliance

EN61000-4-5 Level 3 for AC Mains Surge

EN55035

### Ordering Information

Part #	Description
700-15496-0000	19" 2RU 30KW Power Shelf
700-15485-0000	48V 3KW ATS Power Supply
700-15499-0000	Shelf Management Controller

<sup>1</sup> Max Current Step: 10% to 60%, 50% to 10%

<sup>2</sup> Dynamic Load: 50Hz / 50% Duty

<sup>3</sup> Slew Rate: 1A/uS



## 48 V, 3 kW, EIA Rectifier with ATS

### SPECIAL FEATURES

- Greater than 96% efficiency from 240 to 277 V AC input with 30 to 100% load (peak efficiency of 97%)
- Automatic Transfer Switch (ATS) built in
- 68 mm wide
- I<sup>2</sup>C monitoring and control
- > 24 msec hold up
- 200 to 277 VAC input
- Active current sharing
- OCP compliant
- Hot pluggable PSUs
- Status LEDs for fault monitoring
- 30 kW N+2

### Total Output Power

3 kW

### Safety

- IEC 62368-1
- UL62368-1
- EN62368-1

### Electrical Specifications

	MIN	NOM	MAX
<b>Input</b>			
Voltage VAC	180	200/277	305
Hold up (@100% Load 200 to 277 VAC) msec		25	
iTHD (Load >30%) %			5
Power Factor 10% and Above	95		
<b>Output</b>			
Set Point VDC (20% Load)	49.65 V	49.7 V	49.75 V
Droop (0~100% load)		-1.5 V	
Current A	0		62
Ripple & Noise (@ 20MHz BW) mVpp			500
Output Excursion (from Nominal voltage) During Transient Loading V <sup>1,2,3</sup>	-1		+1

### Compliance

EN61000-4-5 Level 3 for AC Mains Surge

EN55035

### Ordering Information

Part #	Description
700-15496-0000	19" 2RU 30KW Power Shelf
700-15485-0000	48V 3KW ATS Power Supply
700-15499-0000	Shelf Management Controller

<sup>1</sup> Max Current Step: 10% to 60%, 50% to 100%

<sup>2</sup> Dynamic Load: @50Hz to 10kHz

<sup>3</sup> Slew Rate: 1A/uSEC

## DIN RAIL

# ADN-C Series

## Single Phase

120 to 960 W

### SPECIAL FEATURES

- Slim form factor
- Five year warranty
- High efficiency > 90% typical
- Full power at 60°C
- PowerBoost technology
- Industrial grade design
  - Metal mounting clip
  - Metal case
- MTBF > 450,000h demonstrated at 40°C
- Active PFC > 0.92
- Adjustable output
- Over-voltage protection with auto recovery
- Continuous short-circuit and over-load protection
- SEMI F47 Sag Immunity
- New visual diagnostic LED
- Three Status LEDs
  - Input, Output, Alarm
- DC OK Relay
- Parallel operation capability
- Screw terminal connections
- RoHS compliant
- No tools required for mounting



### Electrical Specifications

Input	
AC Input Range	Nominal: 115 to 230 VAC 85 to 264 VAC
DC Input Range	90 to 375 VDC
Frequency	47 to 67 Hz
Efficiency	> 90%
Inrush Current	ADN5-24-1PM-C: < 15 A ADN10-24-1PM-C: < 30 A ADN20-24-1PM-C: < 40 A
PFC	Active, better than 0.92

### Electrical Specifications

Output	
Nominal Voltage	ADN5-24-1PM-C & ADN10-24-1PM-C: 24 VDC (22.5 to 28.5 VDC Adj) ADN20-24-1PM-C: 24 VDC (24 to 28 VDC Adj)
Initial Voltage Setting	24.5 V ±1%
Hold-up Time	> 20 ms @ full load (100 VAC Input @ T <sub>amb</sub> = +25°C)
Voltage Regulation	< ±2% (combination line, load, time and temperature related changes)
Ripple	ADN5-24-1PM-C & ADN10-24-1PM-C: < 50 mVpp ADN20-24-1PM-C: < 100 mVpp
Back EMF Immunity	< 35 VDC
PowerBoost	1.5x Nominal current for 4 seconds
Short-circuit Current	1.5x Nominal current @ near zero volts at short-circuit condition
Parallel Operation	Switch selectable single unit or parallel unit operation. Units will Not be damaged by parallel operation (regardless of switch position setting)
Output Noise Suppression	Radiated EMI values below EN61000-6-2
Over-Voltage Protection	> 30.5 VDC but < 33 VDC, auto recovery
Line and Load Regulation	< 0.5%
Time and Temperature Drift	< 1%

### Ordering Information

Power	Voltage		Current	Size L x W x H		Model Number
	VAC	VDC		in	mm	
120 W	85 to 264 VAC	90 to 375 VDC	5 A	4.85 x 1.97 x 4.37 in	123 x 50 x 111	ADN5-24-1PM-C
240 W	85 to 264 VAC	90 to 375 VDC	10 A	4.85 x 2.36 x 4.37 in	123 x 60 x 111	ADN10-24-1PM-C
480 W	85 to 264 VAC	90 to 375 VDC	20 A	4.85 x 3.42 x 4.96 in	123 x 87 x 126	ADN20-24-1PM-C
960 W	85 to 264 VAC	90 to 375 VDC	40 A	4.81 x 7.09 x 4.85 in	122.2 x 180 x 123.3	ADN40-24-1PM-C

# ADN-C Series

## 3-Phase

120 to 960 W



### SPECIAL FEATURES

- Slim form factor
- Five year warranty
- High efficiency > 93% typical
- Full power at 60°C
- PowerBoost technology
- Industrial grade design – metal cases
- MTBF > 450,000h demonstrated at 40°C
- Active PFC
- Adjustable output
- Over-voltage protection with auto recovery
- Continuous short-circuit and over-load protection
- Three Status LEDs – Input, Output, Alarm
- DC OK Relay
- Parallel operation capability
- Screw terminal connections
- RoHS compliant
- No tools required for mounting

### Electrical Specifications

Input	
Nominal Voltage	380 to 480 VAC
AC Input Range	320 to 540 VAC
DC Input Range	450 to 720 VDC for ADN20
Frequency	50 to 60 Hz
Efficiency	93% for ADN20; 94% for ADN40
PFC	Active power factor correction
Two Phase Input	Derate to 75% and 50% for ADN20 and ADN40 respectively under loss of 1 phase. Units will shut down if thermal threshold is exceeded under this condition
Output	
Nominal Voltage	24 V (24.0 to 28.0 VDC Adj.)
Hold-up Time	> 20 ms for ADN20; > 15 ms for ADN40
Voltage Regulation	< ±2% overall
Ripple	< 100 mVpp
PowerBoost	1.5x Nominal current for 4 seconds
Peak Current	1.5x Nominal current for 4 seconds minimum while holding voltage > 20 VDC
Parallel Operation	Single or parallel operation selectable via front switch. For redundant operation use of external diode module is preferred; ADN40 uses active paralleling
Power Back Immunity	> 35 V
Over-voltage Protection	> 30.5 VDC but < 33 VDC, auto recovery

### Ordering Information

Power	Voltage		Current	Size L x W x H		Model Number
	VAC	VDC		in	mm	
<b>120 W</b>	320 to 540 VAC	450 to 760 VDC	5 A @ 24 VDC	4.85 x 1.97 x 4.37 in	123 x 50 x 111	ADN5-24-3PM-C
<b>240 W</b>	320 to 540 VAC	450 to 760 VDC	10 A @ 24 VDC	4.85 x 2.36 x 4.37 in	123 x 60 x 111	ADN10-24-3PM-C
<b>480 W</b>	320 to 540 VAC	450 to 760 VDC	20 A @ 24 VDC	4.68 x 3.34 x 4.85 in	119 x 85 x 123	ADN20-24-3PM-C
<b>960 W</b>	320 to 540 VAC	90 to 375 VDC	40 A @ 24 VDC	4.85 x 7.09 x 4.85 in	123 x 180 x 123	ADN40-24-3PM-C




# DC-DC Converters

As an industry leader in distributed power supplies, Advanced Energy provides an exceptionally wide range of DC-DC power conversion solutions

# Distributed Power Architecture

Advanced Energy understands the needs and nuances of developing power systems using distributed power architecture. We know it is your job to create the most efficient, cost-effective, quality system, and deliver it in a timely fashion.

From full-system power to board-level components, high-power isolated front ends to a full line of isolated and non-isolated DC-DC modules, Advanced Energy is the source for today's power systems.

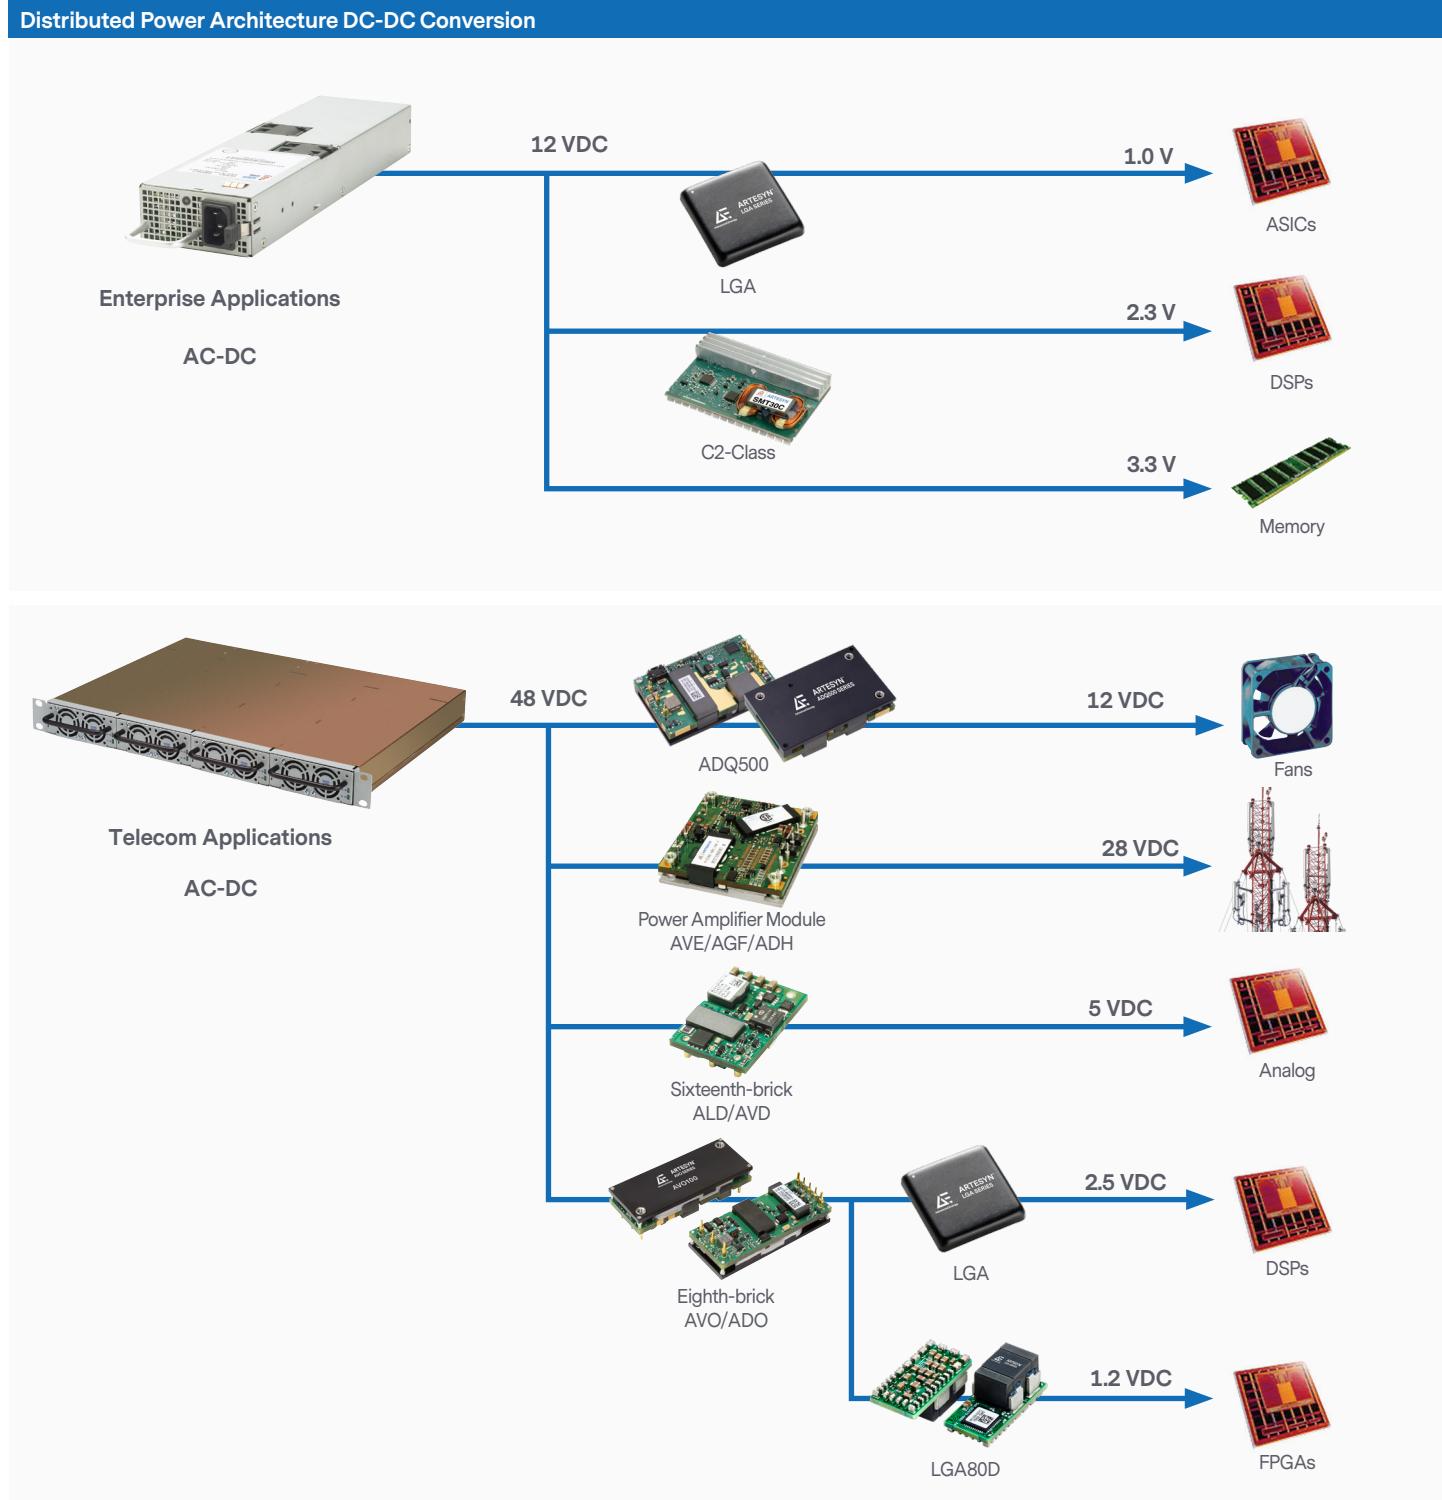

## INDUSTRY STANDARD ISOLATED

# Quarter-Brick



BDQ1300

## SPECIAL FEATURES

- Industry leading quarter-brick standard package and feature sets
- Meets basic insulation
- Up to 100 A offering
- PMBus™ interface
- Wide operating temperature range
- Exceptional dynamic response and reactive loading capability
- Monotonic start-up characteristic
- International safety standards approvals
  - UL, CSA, TÜV

Ordering Information					
Vout	Iout	Input Voltage	Package L x W x H (mm)	Efficiency	Model Number
3.3 V	<b>Open-frame</b>				
	40 A	48 V (36 to 75 V)	2.28 x 1.45 x 0.39 in (57.9 x 36.8 x 9.8)	91%	AGQ200B-48S3V3-4L
	<b>Baseplate</b>				
	40 A	48 V (36 to 75 V)	2.28 x 1.45 x 0.50 in (57.9 x 36.8 x 12.7)	91%	AGQ200B-48S3V3B-4L
5 V	<b>Open-frame</b>				
	20 A	24 V (18 to 36 V)	2.28 x 1.45 x 0.39 in (57.9 x 36.8 x 9.8)	91%	AVQ100-24S05-4L
	<b>Baseplate</b>				
	20 A	24 V (18 to 36 V)	2.28 x 1.45 x 0.50 in (57.9 x 36.8 x 12.7)	91%	AVQ100-24S05B-4L
10 V	<b>Open-frame</b>				
	60 A	48 V (40 to 60 V)	2.28 x 1.45 x 0.43 in (57.9 x 36.8 x 11)	95%	ADQ600-48S10-6L
	<b>Baseplate</b>				
	60 A	48 V (40 to 60 V)	2.28 x 1.45 x 0.52 in (57.9 x 36.8 x 13.3)	95%	ADQ600-48S10B-6L
12 V	<b>Open-frame</b>				
	25 A	48 V (36 to 75 V)	2.28 x 1.45 x 0.36 in (57.9 x 36.8 x 9.6)	94%	AVQ300-48S12-6L
	33 A	48 V (36 to 75 V)	2.28 x 1.45 x 0.36 in (57.9 x 36.8 x 9.6)	93%	AVQ400-48S12-6L
	42 A	48 V (36 to 75 V)	2.28 x 1.45 x 0.43 in (57.9 x 36.8 x 11)	95%	ADQ500-48S12-6L
	50 A	48 V (40 to 60 V)	2.28 x 1.45 x 0.43 in (57.9 x 36.8 x 11)	95%	ADQ600-48S12-6L
	58 A	48 V (40 to 60 V)	2.3 x 1.4 x 0.43 in (58.4 x 36.8 x 11)	96%	ADQ700-48S12-4L
	58 A	48 V (40 to 60 V)	2.3 x 1.4 x 0.43 in (58.4 x 36.8 x 11)	96%	ADQ700-48S12-4LI
	<b>Baseplate</b>				
	25 A	48 V (36 to 75 V)	2.28 x 1.45 x 0.50 in (57.9 x 36.8 x 12.7)	94%	AVQ300-48S12B-4L
	33 A	48 V (36 to 75 V)	2.28 x 1.45 x 0.50 in (57.9 x 36.8 x 12.7)	93%	AVQ400-48S12B-6L
	42 A	48 V (36 to 75 V)	2.28 x 1.45 x 0.43 in (57.9 x 36.8 x 11)	95%	ADQ500-48S12B-6L
	50 A	48 V (40 to 60 V)	2.28 x 1.45 x 0.52 in (57.9 x 36.8 x 13.3)	95%	ADQ600-48S12B-6L
	50 A	48 V (36 to 75 V)	2.28 x 1.45 x 0.43 in (57.9 x 36.8 x 11)	95.5%	ADQ600B-48S12B-6L/K
	58 A	48 V (40 to 60 V)	2.3 x 1.4 x 0.52 in (58.4 x 36.8 x 13.6)	96%	ADQ700-48S12B-4L
	58 A	48 V (40 to 60 V)	2.3 x 1.4 x 0.52 in (58.4 x 36.8 x 13.6)	96%	ADQ700-48S12B-4LI
	70 A	48 V (40 to 60 V)	2.3 x 1.4 x 0.53 in (58.4 x 36.8 x 13.6)	96%	ADQ800-48S12B-4L
	90 A	48 V (40 to 60 V)	2.3 x 1.4 x 0.57 in (58.4 x 36.8 x 14.5)	97.7%	BCQ1300-48S12B-4L
	90 A	48 V (40 to 60 V)	2.3 x 1.4 x 0.57 in (58.4 x 36.8 x 14.5)	97.5%	BDQ1300-48S12B-4L
	90 A	48 V (40 to 60 V)	2.3 x 1.4 x 0.57 in (58.4 x 36.8 x 14.5)	97.5%	BDQ1300-48S12B-4LI

# Eighth-Brick

## SPECIAL FEATURES

- Industry leading eighth-brick standard package and feature sets
- Scalable output power offering: Low power 80 W series or up to 300 W high power series
- Mechanical options for optimum mounting flexibility: Open-frame (ALO, LES, AVO) or baseplate (AVO-B) construction; Through-hole (default) or surface mount (suffix “-S”) termination; 5 mm (default) or 3.7 mm through-hole pin length option
- PMBus™ interface
- Meets basic insulation
- Power densities as high as 181 W per in<sup>3</sup>
- Wide operating temperature range
- International safety standards approvals – UL, CSA, TÜV



AVO200

## Ordering Information

Vout	Iout	Input Voltage	Package L x W x H (mm)	Efficiency	Model Number
1.2 V	<b>Baseplate</b>				
	50 A	48 V (36 to 75 V)	2.3 x 0.9 x 0.5 in (57.9 x 22.9 x 12.7)	85.5%	AVO100-48S1V2B-6L
<b>Open-frame</b>					
3.3 V	15 A	48 V (36 to 75 V)	2.3 x 0.9 x 0.38 in (57.9 x 22.9 x 9.6)	90%	AVO50C-48S3V3-6
	20 A	24 V/48 V (19 to 60 V)	2.3 x 0.9 x 0.32 in (57.9 x 22.9 x 8.13)	91%	ALO20F36N-L
	30 A	48 V (36 to 75 V)	2.3 x 0.9 x 0.38 in (57.9 x 22.9 x 9.6)	91%	AVO100B-48S3V3-6L
	60 A	48 V (36 to 75 V)	2.3 x 0.9 x 0.44 in (58.4 x 22.9 x 11.2)	93.5%	ADO300-48S3V3-6L
	60 A	48 V (36 to 75 V)	2.3 x 0.9 x 0.44 in (58.4 x 22.9 x 11.2)	93.5%	ADO300-48S3V3-6LI
	<b>Baseplate</b>				
	30 A	48 V (36 to 75 V)	2.3 x 0.9 x 0.4 in (57.9 x 22.9 x 10.16)	91%	AVO100C-48S3V3B-4L
	60 A	48 V (36 to 75 V)	2.3 x 0.9 x 0.53 in (58.4 x 22.9 x 13.5)	93.5%	ADO300-48S3V3B-6L
	60 A	48 V (36 to 75 V)	2.3 x 0.9 x 0.53 in (58.4 x 22.9 x 13.5)	93.5%	ADO300-48S3V3B-6LI


## INDUSTRY STANDARD ISOLATED

Ordering Information					
Vout	Iout	Input Voltage	Package L x W x H (mm)	Efficiency	Model Number
<b>Open-frame</b>					
5 V	20 A	48 V (36 to 75 V)	2.3 x 0.9 x 0.38 in (57.9 x 22.9 x 9.6)	92.8%	AVO100-48S05-6L
	40 A	48 V (36 to 75 V)	2.3 x 0.9 x 0.38 in (57.9 x 22.9 x 9.6)	94%	AVO200-48S05-6L
	60 A	48 V (36 to 75 V)	2.3 x 0.9 x 0.44 in (58.4 x 22.9 x 11.2)	95%	ADO300-48S05-6L
	60 A	48 V (36 to 75 V)	2.3 x 0.9 x 0.44 in (58.4 x 22.9 x 11.2)	95%	ADO300-48S05-6LI
	<b>Baseplate</b>				
	20 A	48 V (36 to 75 V)	2.3 x 0.9 x 0.5 in (57.9 x 22.9 x 12.7)	92.8%	AVO100-48S05B-6L
	40 A	48 V (36 to 75 V)	2.3 x 0.9 x 0.5 in (57.9 x 22.9 x 12.7)	94%	AVO200-48S05B-6L
	60 A	48 V (36 to 75 V)	2.3 x 0.9 x 0.53 in (58.4 x 22.9 x 13.5)	95%	ADO300-48S05B-6L
10.1 V	60 A	48 V (36 to 75 V)	2.3 x 0.9 x 0.53 in (58.4 x 22.9 x 13.5)	95%	ADO300-48S05B-6LI
	<b>Baseplate</b>				
	50 A	48 V (45 to 56 V)	2.3 x 0.91 x 0.48 in (58.4 x 23.2 x 12.2)	96.5%	ADO500-48S10-4L
	55 A	48 V (45 to 56 V)	2.3 x 0.91 x 0.57 in (58.4 x 23.2 x 14.5)	96.5%	ADO550-48S10B-4L
<b>Open-frame</b>					
12 V	10 A	48 V (36 to 75 V)	2.3 x 0.9 x 0.38 in (57.9 x 22.9 x 9.6)	93%	AVO120-48S12-6L
	17 A	48 V (36 to 75 V)	2.3 x 0.9 x 0.38 in (57.9 x 22.9 x 9.6)	94%	AVO200-48S12-6L
	20 A	48 V (41 to 75 V)	2.3 x 0.9 x 0.38 in (57.9 x 22.9 x 9.6)	94%	AVO240-48S12-6L
	26 A	48 V (36 to 75 V)	2.3 x 0.9 x 0.44 in (57.9 x 22.9 x 11.2)	95%	ADO300-48S12-6L
	26 A	48 V (36 to 75 V)	2.3 x 0.9 x 0.44 in (57.9 x 22.9 x 11.2)	95%	ADO300-48S12-6LI
	<b>Baseplate</b>				
	10 A	48 V (36 to 75 V)	2.3 x 0.9 x 0.5 in (57.9 x 22.9 x 12.7)	93%	AVO120-48S12B-6L
	17 A	48 V (36 to 75 V)	2.3 x 0.9 x 0.5 in (57.9 x 22.9 x 12.7)	94%	AVO200-48S12B-6L
	20 A	48 V (41 to 75 V)	2.3 x 0.9 x 0.5 in (57.9 x 22.9 x 12.7)	94%	AVO240-48S12B-6L
	26 A	48 V (36 to 75 V)	2.3 x 0.9 x 0.53 in (57.9 x 22.9 x 13.5)	95%	ADO300-48S12B-6L
	26 A	48 V (36 to 75 V)	2.3 x 0.9 x 0.53 in (57.9 x 22.9 x 13.5)	95%	ADO300-48S12B-6LI

# Sixteenth-Brick

## SPECIAL FEATURES

- Industry leading sixteenth-brick standard package and feature sets
- Scalable offering: 35 W, 50 W, 75 W, 85 W and 120 W platforms
- Mechanical options for optimum mounting flexibility: Through-hole (default) or surface mount (suffix “-S”) termination; 5 mm (default) or 3.7 mm through-hole pin length option
- Meets basic insulation
- Power densities as high as 146.5 W per in<sup>3</sup>
- International safety standards approvals – UL, CSA, TÜV

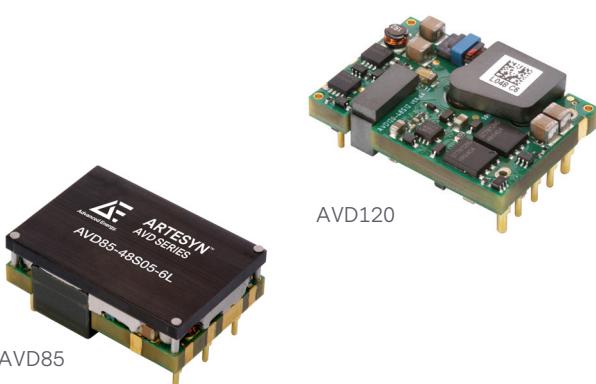

Ordering Information					
Vout	Iout	Input Voltage	Package L x W x H (mm)	Efficiency	Model Number
<b>Open-frame</b>					
1.2 V	15 A	48 V (36 to 75 V)	1.3 x 0.9 x 0.35 in (33 x 22.9 x 8.89)	84%	ALD15K48N-L
	25 A	48 V (36 to 75 V)	1.3 x 0.9 x 0.34 in (33 x 22.9 x 8.5)	84%	AVD75-48S1V2-6L
	<b>Baseplate</b>				
	25 A	48 V (36 to 75 V)	1.3 x 0.9 x 0.5 in (33 x 22.9 x 12.7)	84%	AVD75-48S1V2B-6L
<b>Open-frame</b>					
3.3 V	15 A	48 V (36 to 75 V)	1.3 x 0.9 x 0.37 in (33 x 22.9 x 9.5)	91%	AVD50B-48S3V3-6L
	20 A	48 V (36 to 75 V)	1.3 x 0.9 x 0.39 in (33 x 22.9 x 10)	92%	AVD75-48S3V3-6L
	23 A	48 V (36 to 75 V)	1.3 x 0.9 x 0.36 in (33 x 22.9 x 9.2)	91.5%	AVD75B-48S3V3-6L
	25 A	48 V (36 to 75 V)	1.3 x 0.9 x 0.39 in (33 x 22.9 x 10)	92%	AVD85-48S3V3-6L
<b>Baseplate</b>					
3.3 V	15 A	48 V (36 to 75 V)	1.3 x 0.9 x 0.47 in (33 x 22.9 x 12)	92%	AVD50B-48S3V3B-6L
	20 A	48 V (36 to 75 V)	1.3 x 0.9 x 0.5 in (33 x 22.9 x 12.7)	92%	AVD75-48S3V3B-6L
	23 A	48 V (36 to 75 V)	1.3 x 0.9 x 0.47 in (33 x 22.9 x 12)	91.5%	AVD75B-48S3V3B-6L
	25 A	48 V (36 to 75 V)	1.3 x 0.9 x 0.5 in (33 x 22.9 x 12.7)	92%	AVD85-48S3V3B-6L
<b>SMT pin with reel tape package</b>					
3.3 V	15 A	48 V (36 to 75 V)	1.3 x 0.9 x 0.37 in (33 x 22.9 x 9.4)	92%	AVD50B-48S3V3TL
	23 A	48 V (36 to 75 V)	1.3 x 0.9 x 0.37 in (33 x 22.9 x 9.4)	91.5%	AVD75B-48S3V3TL

## INDUSTRY STANDARD ISOLATED

Ordering Information					
Vout	Iout	Input Voltage	Package L x W x H (mm)	Efficiency	Model Number
<b>Open-frame</b>					
5 V	7 A	48 V (36 to 75 V)	1.3 x 0.9 x 0.35 in (33 x 22.9 x 8.89)	91%	ALD07A48N-L
	10 A	48 V (36 to 75 V)	1.3 x 0.9 x 0.36 in (33 x 22.9 x 9.2)	91.5%	AVD50B-48S05-6L
	10 A	48 V (36 to 75 V)	1.3 x 0.9 x 0.37 in (33 x 22.9 x 9.5)	92%	AVD50-48S05-6L
	15 A	48 V (36 to 75 V)	1.3 x 0.9 x 0.36 in (33 x 22.9 x 9.2)	91.5%	AVD75B-48S05-6L
	17 A	48 V (36 to 75 V)	1.3 x 0.9 x 0.36 in (33 x 22.9 x 9.2)	91.5%	AVD85B-48S05-6L
	17 A	48 V (36 to 75 V)	1.3 x 0.9 x 0.39 in (33 x 22.9 x 10)	92%	AVD85-48S05-6L
	20 A	48 V (36 to 75 V)	1.3 x 0.9 x 0.39 in (33 x 22.9 x 10)	92%	AVD100-48S05-6L
<b>Baseplate</b>					
	10 A	48 V (36 to 75 V)	1.3 x 0.9 x 0.47 in (33 x 22.9 x 12)	91.5%	AVD50B-48S05B-6L
	15 A	48 V (36 to 75 V)	1.3 x 0.9 x 0.47 in (33 x 22.9 x 12)	91.5%	AVD75B-48S05B-6L
	17 A	48 V (36 to 75 V)	1.3 x 0.9 x 0.47 in (33 x 22.9 x 12)	91.5%	AVD85B-48S05B-6L
	17 A	48 V (36 to 75 V)	1.3 x 0.9 x 0.5 in (33 x 22.9 x 12.7)	92%	AVD85-48S05B-6L
	20 A	48 V (36 to 75 V)	1.3 x 0.9 x 0.5 in (33 x 22.9 x 12.7)	92%	AVD100-48S05B-6L
<b>SMT pin with reel tape package</b>					
	10 A	48 V (36 to 75 V)	1.3 x 0.9 x 0.37 in (33 x 22.9 x 9.4)	91.5%	AVD50B-48S05TL
	15 A	48 V (36 to 75 V)	1.3 x 0.9 x 0.37 in (33 x 22.9 x 9.4)	91.5%	AVD75B-48S05TL
	17 A	48 V (36 to 75 V)	1.3 x 0.9 x 0.37 in (33 x 22.9 x 9.4)	91.5%	AVD85B-48S05TL
<b>Open-frame</b>					
12 V	2.75 A	48 V (36 to 75 V)	1.3 x 0.9 x 0.35 in (33 x 22.9 x 8.89)	92%	ALD03B48N-L
	4.17 A	48 V (36 to 75 V)	1.3 x 0.9 x 0.36 in (33 x 22.9 x 9.2)	93%	AVD50B-48S12-6L
	6.25 A	48 V (36 to 75 V)	1.3 x 0.9 x 0.36 in (33 x 22.9 x 9.2)	93.3%	AVD75B-48S12-6L
	7 A	48 V (36 to 75 V)	1.3 x 0.9 x 0.39 in (33 x 22.9 x 10)	92%	AVD85-48S12-6L
	7.1 A	48 V (36 to 75 V)	1.3 x 0.9 x 0.36 in (33 x 22.9 x 9.2)	93.3%	AVD85B-48S12-6L
	10 A	48 V (36 to 75 V)	1.3 x 0.9 x 0.39 in (33 x 22.9 x 10)	92%	AVD120-48S12-6L
	17 A	48 V (36 to 75 V)	1.3 x 0.9 x 0.43 in (33 x 22.9 x 10.9)	94.2%	AVD200-48S12-6L
<b>Baseplate</b>					
	4.17 A	48 V (36 to 75 V)	1.3 x 0.9 x 0.47 in (33 x 22.9 x 12)	93%	AVD50B-48S12B-6L
	6.25 A	48 V (36 to 75 V)	1.3 x 0.9 x 0.47 in (33 x 22.9 x 12)	93.3%	AVD75B-48S12B-6L
	7 A	48 V (36 to 75 V)	1.3 x 0.9 x 0.5 in (33 x 22.9 x 12.7)	92%	AVD85-48S12B-6L
	7.1 A	48 V (36 to 75 V)	1.3 x 0.9 x 0.47 in (33 x 22.9 x 12)	93.3%	AVD85B-48S12B-6L
	10 A	48 V (36 to 75 V)	1.3 x 0.9 x 0.5 in (33 x 22.9 x 12.7)	92%	AVD120-48S12B-6L
	17 A	48 V (36 to 75 V)	1.3 x 0.9 x 0.5 in (33 x 22.9 x 12.7)	94.2%	AVD200-48S12B-6L
<b>SMT pin with reel tape package</b>					
	4.17 A	48 V (36 to 75 V)	1.3 x 0.9 x 0.37 in (33 x 22.9 x 9.4)	93%	AVD50B-48S12TL
	6.25 A	48 V (36 to 75 V)	1.3 x 0.9 x 0.37 in (33 x 22.9 x 9.4)	93.3%	AVD75B-48S12TL
	7.1 A	48 V (36 to 75 V)	1.3 x 0.9 x 0.37 in (33 x 22.9 x 9.4)	93.3%	AVD85B-48S12TL
	17 A	48 V (36 to 75 V)	1.3 x 0.9 x 0.43 in (33 x 22.9 x 10.9)	94.2%	AVD200-48S12TL

# Radio Frequency Power Modules



## SPECIAL FEATURES

- Specialized high power bricks for RF applications such as base station power amplifiers
- Offered in 24 V and 48 V input voltages
- Wide output voltage adjustability
- -40 to 85°C for AVE, AGF baseplate temperature with No derating at rated power
- International safety standard approvals – UL, CSA, VDE, CB Report

### Eight-Brick

Vout	Iout	Input Voltage	Package L x W x H (mm)	Efficiency	Model Number
<b>Open-Frame</b>					
28 V	3.57 A	48 V (36 to 75 V)	2.3 x 0.9 x 0.39 in (57.9 x 22.9 x 9.6)	92%	AVO100-48S28-6L
<b>Baseplate</b>					
	3.57 A	48 V (36 to 75 V)	2.3 x 0.9 x 0.5 in (57.9 x 22.9 x 12.7)	92%	AVO100-48S28B-6L
	9 A	48 V (36 to 75 V)	2.3 x 0.9 x 0.5 in (57.9 x 22.9 x 12.7)	93%	AVO250-48S28B-6L

### Quarter-Brick

Vout	Iout	Input Voltage	Package L x W x H (mm)	Efficiency	Model Number
<b>Baseplate</b>					
50 V	10 A	48 V (36 to 75 V)	2.28 x 1.45 x 0.5 in (57.9 x 36.8 x 12.7)	94%	AGQ500-48S50-6L
	10 A	48 V (36 to 75 V)	2.28 x 1.45 x 0.5 in (57.9 x 36.8 x 12.7)	94%	AGQ500-48S50P-6L

### Half-Brick

Vout	Iout	Input Voltage	Package L x W x H (mm)	Efficiency	Model Number
<b>Aluminum Substrate</b>					
28 V	12.5 A	24 V (18 to 36 V)	2.4 x 2.3 x 0.5 in (61 x 57.9 x 12.7)	93%	AVE350-24S28-6L
	12.5 A	48 V (36 to 75 V)	2.4 x 2.3 x 0.5 in (61 x 57.9 x 12.7)	93%	AVE350B-48S28-6
	16 A	48 V (36 to 75 V)	2.4 x 2.3 x 0.5 in (61 x 57.9 x 12.7)	94%	AVE450B-48S28-6L/M
	25 A	48 V (36 to 65 V)	2.3 x 2.4 x 0.5 in (57.9 x 61 x 12.7)	95%	ADH700-48S28-6L
	25 A	48 V (36 to 75 V)	2.3 x 2.4 x 0.5 in (57.9 x 61 x 12.7)	95%	ADH700-48S28-6LS
	25 A	48 V (36 to 65 V)	2.3 x 2.4 x 0.5 in (57.9 x 61 x 12.7)	95%	ADH700-48S28P-6L
	25 A	48 V (36 to 75 V)	2.3 x 2.4 x 0.5 in (57.9 x 61 x 12.7)	95%	ADH700-48S28P-6LS
<b>Baseplate</b>					
	25 A	48 V (36 to 75 V)	2.3 x 2.4 x 0.5 in (57.9 x 61 x 12.7)	95.5%	AVE700-48S28B-6L
	25 A	48 V (36 to 75 V)	2.3 x 2.4 x 0.5 in (57.9 x 61 x 12.7)	95.5%	AVE700-48S28PB-6L
	46.5 A	48 V (36 to 75 V)	2.3 x 2.4 x 0.5 in (57.9 x 61 x 12.7)	95%	ADH1300-48S28B-6LI

Vout	Iout	Input Voltage	Package L x W x H (mm)	Efficiency	Model Number
<b>Aluminum Substrate</b>					
50 V	9 A	48 V (36 to 75 V)	2.3 x 2.4 x 0.5 in (57.9 x 61 x 12.7)	95%	AVE450-48S50-6L
	9 A	48 V (36 to 75 V)	2.3 x 2.4 x 0.5 in (57.9 x 61 x 12.7)	95%	AVE450-48S50P-6L
	10 A	48 V (36 to 75 V)	2.3 x 2.4 x 0.5 in (57.9 x 61 x 12.7)	95%	AVE500-48S50-6L
	10 A	48 V (36 to 75 V)	2.3 x 2.4 x 0.5 in (57.9 x 61 x 12.7)	95%	AVE500-48S50P-6L
	14 A	48 V (36 to 65 V)	2.3 x 2.4 x 0.5 in (57.9 x 61 x 12.7)	95%	ADH700-48S50-6L
	14 A	48 V (36 to 75 V)	2.3 x 2.4 x 0.5 in (57.9 x 61 x 12.7)	95%	ADH700-48S50-6LS
	14 A	48 V (36 to 65 V)	2.3 x 2.4 x 0.5 in (57.9 x 61 x 12.7)	95%	ADH700-48S50P-6L
	14 A	48 V (36 to 75 V)	2.3 x 2.4 x 0.5 in (57.9 x 61 x 12.7)	95%	ADH700-48S50P-6LS

### Full-Brick

Vout	Iout	Input Voltage	Package L x W x H (mm)	Efficiency	Model Number
<b>Aluminum Substrate</b>					
28 V	21.5 A	24 V (18 to 36 V)	4.6 x 2.4 x 0.5 in (116.8 x 61 x 12.7)	93%	AGF600-24S28-6L
	21.5 A	48 V (36 to 75 V)	4.6 x 2.4 x 0.5 in (116.8 x 61 x 12.7)	93.5%	AGF600-48S28-6L
	25 A	48 V (36 to 75 V)	4.6 x 2.4 x 0.5 in (116.8 x 61 x 12.7)	93%	AGF700-48S30LT
	28.5 A	48 V (36 to 75 V)	4.6 x 2.4 x 0.5 in (116.8 x 61 x 12.7)	94%	AGF800-48S28-6L
48 V	16 A	50 V (36 to 75 V)	4.6 x 2.4 x 0.5 in (116.8 x 61 x 12.7)	94.5%	AGF800-48S48P-6L
30 V/5 V	23.3 A / 20 A	48 V (36 to 75 V)	4.6 x 2.4 x 0.5 in (116.8 x 61 x 12.7)	93.5%	AGF800-48D3005-6L

## INDUSTRY STANDARD ISOLATED

# Wide Input Voltage Series




### SPECIAL FEATURES

- Wide input voltage range to cover 24 V and 48 V input
- Industry standard brick package
- Open-frame and baseplate construction
- Wide operating temperature

AVQ100

Ordering Information							
		Vout	Iout	Input Voltage	Efficiency	Package L x W x H (mm)	Model Number
Quarter Brick	Baseplate	3.3 V	25 A	24 V, 48 V (18 to 60 V)	90% @ 48 vin, 92% @ 24 vin	2.28 x 1.45 x 0.40 in (57.9 x 36.8 x 10.2)	AVQ100-36S3V3B-6L
Quarter Brick	Baseplate	12 V	19 A	24 V, 48 V (18 to 75 V)	94%	2.28 x 1.45 x 0.50 in (57.9 x 36.8 x 12.7)	AVQ200-36S12B-6L
Quarter Brick	Open-frame	3.3 V	25 A	24 V, 48 V (18 to 60 V)	90% @ 48 vin, 92% @ 24 vin	2.28 x 1.45 x 0.40 in (57.9 x 36.8 x 10.2)	AVQ100-36S3V3-6L
Quarter Brick	Open-frame	12 V	19 A	24 V, 48 V (18 to 75 V)	94%	2.28 x 1.45 x 0.38 in (57.9 x 36.8 x 9.6)	AVQ200-36S12-6L

# Direct Conversion - Power Stamp Alliance Series

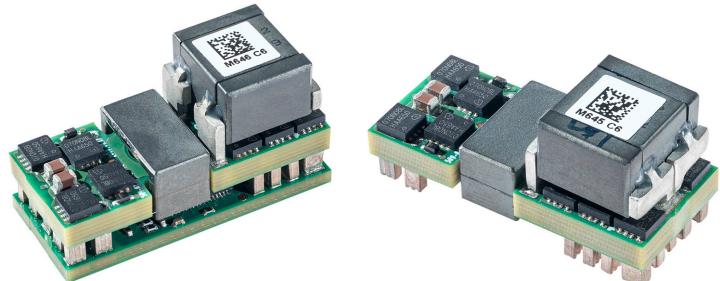

ADC100M

ADC100S

### SPECIAL FEATURES

- 100 A peak current
- PSA compliant
- Up to 93% efficient
- Low ripple and Noise
- Data center 48 VDC input range

- Open frame optimized for air cooling
- Surface mount termination
- Fixed switching frequency
- High capacitive load capability

- Pre-bias start-up capability
- High reliability
- RoHS 3.0 compliant
- UL94 V-0 materials

Ordering Information					
Input Voltage	Vout	Iout	Efficiency	Package L x W x H (mm)	Model Number
40 to 60 VDC	5 V / Vdd & 5 V / Vcc	0.5 A / 2 A		1.18 x 0.5 x 0.415 in (20.8 x 12.7 x 10.55)	ADC100C
40 to 60 VDC	1.6 to 2.0 V	100 A	92%	1.18 x 0.5 x 0.67 in (30 x 12.7 x 17)	ADC100M-04Y
40 to 60 VDC	1.6 to 2.0 V	100 A	92%	1.18 x 0.5 x 0.59 in (30 x 12.7 x 15)	ADC100S-04Y
40 to 60 VDC	0.8 to 1.1 V	120 A	91%	1.18 x 0.5 x 0.67 in (30 x 12.7 x 17)	ADC100M-04J
40 to 60 VDC	0.8 to 1.1 V	120 A	91%	1.18 x 0.5 x 0.59 in (30 x 12.7 x 15)	ADC100S-04J

# C-Class – High Density

## Non-Isolated DC-DC Converters

The second generation C-class non-isolated DC-DC converters are designed to provide good efficiency and performance, a smaller footprint, and integrated input and output capacitors.



LDO03C

## SPECIAL FEATURES

- Wide input voltage ranges: 3 to 13.8 V or 4.5 to 13.8 V
- Wide output voltage trim/adjustability: 0.59 to 5.1 V
- Output current: 3 to 40 A
- High efficiency up to 94%
- Remote sense (Sxx20C2 and Sxx60C2)
- Operating temperature range for LDO03, LDO06, LDO10: -40 to 85°C.
- Operating temperature range for SIL/SMT20C2, SIL/SMT40C2 and SIL60C2: 0 to 70°C
- Cost-optimized design – industry leading value
- Compact footprint, vertical, horizontal and horizontal SMT options
- International safety standard approvals – UL, CSA, TÜV & CB Report

Ordering Information					
Output Current	Input Voltage	Output Voltage	Efficiency	Package L x W x H (mm)	Model Number
<b>Single-In-Line, Through-Hole Mounting</b>					
<b>3 A</b>	3.0 to 13.8 VDC	0.59 to 5.1 V	90%	0.37 x 0.21 x 0.61 in (9.4 x 5.33 x 15.49)	LDO03C-005W05-VJ
<b>6 A</b>	3.0 to 13.8 VDC	0.59 to 5.1 V	92%	0.41 x 0.37 x 0.65 in (10.41 x 9.4 x 16.51)	LDO06C-005W05-VJ
<b>10 A</b>	3.0 to 13.8 VDC	0.59 to 5.1 V	94%	0.41 x 0.45 x 0.65 in (10.41 x 11.43 x 16.51)	LDO10C-005W05-VJ
<b>20 A</b>	4.5 to 13.8 VDC	0.59 to 5.1 V	93%	1.2 x 0.46 x 0.61 in (30.48 x 11.68 x 15.49)	SIL20C2-00SADJ-VJ
<b>Surface-Mounting</b>					
<b>3 A</b>	3.0 to 13.8 VDC	0.59 to 5.1 V	90%	0.61 x 0.37 x 0.29 in (15.49 x 9.4 x 7.37)	LDO03C-005W05-SJ
<b>6 A</b>	3.0 to 13.8 VDC	0.59 to 5.1 V	92%	0.65 x 0.41 x 0.44 in (16.51 x 10.41 x 11.18)	LDO06C-005W05-SJ
<b>10 A</b>	3.0 to 13.8 VDC	0.59 to 5.1 V	94%	0.65 x 0.41 x 0.52 in (16.51 x 10.41 x 13.21)	LDO10C-005W05-SJ
<b>20 A</b>	4.5 to 13.8 VDC	0.59 to 5.1 V	93%	1.2 x 0.61 x 0.48 in (30.48 x 15.49 x 12.19)	SMT20C2-00SADJJ

## INDUSTRY STANDARD NON-ISOLATED

# LGA Series

## Dual Output Non-Isolated Digital DC-DC Converter



LGA80D



LGA50D



LGA110D



LGA110D-DEMO-KIT

## SPECIAL FEATURES

- Two-phase design
- Dual or single output configuration possible
- High efficiency up to 95.5%
- Small size 1" x 0.5" (L x W)
- Support PMBus
- No minimum load requirement
- Wide operating temperature range
- Exceptional power density
- Automatic loop compensation
- Excellent transient response
- Analog or digital control

- IPC9592B compliant
- Tape and reel packaging
- Reflow compatible
- Can stack up to 8 phases
- Two-year warranty
- Evaluation kit is available

Ordering Information					
Output current	Input voltage	Output voltage	Efficiency	Package L x W x H (mm)	Model number
<b>Total current 50A</b>	7.5 to 14 VDC	0.6 to 5.2V	95.5%	1 x 0.5 x 0.48 in (25.4 x 12.7 x 12.2)	LGA50D-01DADJ
<b>Channel 1; 25A</b>	7.5 to 14 VDC	0.6 to 5.2V	95.5%	1 x 0.5 x 0.48 in (25.4 x 12.7 x 12.2)	LGA50D-01DADJ
<b>Channel 2; 25A</b>	7.5 to 14 VDC	0.6 to 5.2V	95.5%	1 x 0.5 x 0.48 in (25.4 x 12.7 x 12.2)	LGA50D-01DADJ
<b>Total current 50A</b>	7.5 to 14 VDC	0.6 to 5.2V	95.5%	1 x 0.5 x 0.41 in (25.4 x 12.7 x 10.6)	LGA50D-01DADJSBJ
<b>Channel 1; 25A</b>	7.5 to 14 VDC	0.6 to 5.2V	95.5%	1 x 0.5 x 0.41 in (25.4 x 12.7 x 12.2)	LGA50D-01DADJSBJ
<b>Channel 2; 25A</b>	7.5 to 14 VDC	0.6 to 5.2V	95.5%	1 x 0.5 x 0.41 in (25.4 x 12.7 x 12.2)	LGA50D-01DADJSBJ
<b>Total current 50A</b>	7.5 to 14 VDC	0.6 to 3.3V	91.1%	1 x 0.5 x 0.23 in (25.4 x 12.7 x 5.85)	LGA50D-01DADJLPJ
<b>Channel 1; 25A</b>	7.5 to 14 VDC	0.6 to 3.3V	91.1%	1 x 0.5 x 0.23 in (25.4 x 12.7 x 5.85)	LGA50D-01DADJLPJ
<b>Channel 2; 25A</b>	7.5 to 14 VDC	0.6 to 3.3V	91.1%	1 x 0.5 x 0.23 in (25.4 x 12.7 x 5.85)	LGA50D-01DADJLPJ
<b>Total current 80A</b>	7.5 to 14 VDC	0.6 to 5.2V	95.5%	1 x 0.5 x 0.48 in (25.4 x 12.7 x 12.2)	LGA80D-01DADJJ
<b>Channel 1; 40A</b>	7.5 to 14 VDC	0.6 to 5.2V	95.5%	1 x 0.5 x 0.48 in (25.4 x 12.7 x 12.2)	LGA80D-01DADJJ
<b>Channel 2; 40A</b>	7.5 to 14 VDC	0.6 to 5.2V	95.5%	1 x 0.5 x 0.48 in (25.4 x 12.7 x 12.2)	LGA80D-01DADJJ
<b>Total output 110A</b>	7.5 to 14 VDC	0.5V to 5V	96%	1.08 x 0.5 x 0.52 in (27.5 x 12.8 x 13.4)	LGA110D-01DADJJ
<b>Channel 1; 55A</b>	7.5 to 14 VDC	0.5V to 5V	96%	1.08 x 0.5 x 0.52 in (27.5 x 12.8 x 13.4)	LGA110D-01DADJJ
<b>Channel 2; 55A</b>	7.5 to 14 VDC	0.5V to 5V	96%	1.08 x 0.5 x 0.52 in (27.5 x 12.8 x 13.4)	LGA110D-01DADJJ

# C-Class – High Density LGA C Series

The latest addition to the c-class non-isolated DC-DC converter offering packaged in an ultra-compact, low-profile land grid array with current densities up to 225 A/in<sup>3</sup>.



## SPECIAL FEATURES

- High density, ultra low profile surface mount module in Land Grid Array (LGA) package
- Available in 4 different output current levels: 3, 6, 10 and 20 A
- Wide input voltage range: 3.0 to 14.0 V
- Adjustable output voltage: 0.59 to 5.1 V via external resistor
- High efficiency ~92% typical
- Wide ambient operating temperature range: -40 to 85°C
- Input UVLO; remote On/Off; output adjust; margin; PGood signal, differential sense
- Current sink capability for voltage termination applications
- Integrated input and output capacitors resulting in minimal external capacitance required for stable operation

Ordering Information					
Output Current	Input Voltage	Output Voltage	Efficiency	Package L x W x H (mm)	Model Number
<b>Surface-Mounting</b>					
<b>3 A</b>	3.0 to 14 VDC	0.59 to 5.1 V	92%	0.65 x 0.65 x 0.129 in (16.51 x 16.51 x 3.27)	LGA03C-00SADJJ
<b>6 A</b>	3.0 to 14 VDC	0.59 to 5.1 V	92%	0.65 x 0.65 x 0.129 in (16.51 x 16.51 x 3.27)	LGA06C-00SADJJ
<b>10 A</b>	3.0 to 14 VDC	0.59 to 5.1 V	92%	0.65 x 0.65 x 0.129 in (16.51 x 16.51 x 3.27)	LGA10C-00SADJJ
<b>20 A</b>	4.5 to 14 VDC	0.59 to 5.1 V	91%	0.65 x 0.65 x 0.210 in (16.51 x 16.51 x 5.33)	LGA20C-01SADJJ

**1** Optional heatsink kits are available. Ordering part number is LGA-HTSK-KIT-XXX

XXX = Total height of the LGA20C-01SADJJ with heatsink attached: 045 = 0.45"; 048 = 0.48"; 050 = 0.50"

# Digital DC-DC Converters

## SPECIAL FEATURES

- PMBus™ compliant control and monitoring functions available on all digital DC-DC products
- Popular monitoring functions such as temperature, voltage, and current are all available
- Control functions for enabling and sequencing are all available.



BDQ1300

## ISOLATED DC-DC SPECIAL FEATURES

- Isolated DC-DC converters follow the DOSA standard footprints for digital interface bricks

Ordering Information					
Vout	Iout	Input Voltage	Package size	Efficiency	Model Number
12 VDC	26 A	48 V (36 to 75 V)	Eighth brick	95%	ADO300-48S12-6LI
	26 A	48 V (36 to 75 V)	Eighth brick	95%	ADO300-48S12B-6LI
	42 A	48 V (36 to 75 V)	Quarter brick	95%	ADQ500-48S12-6LI
	42 A	48 V (36 to 75 V)	Quarter brick	95%	ADQ500-48S12B-6LI
	58 A	48 V (40 to 60 V)	Quarter brick	96%	ADQ700-48S12-LI
	58 A	48 V (40 to 60 V)	Quarter brick	96%	ADQ700-48S12B-6LI
	90 A	48 V (40 to 60 V)	Quarter brick	97.5%	BDQ1300-48S12B-4LI

# New Generation Digital DC-DC Converters

## SPECIAL FEATURES

- Digital controlled with PMBus™ function, non-isolated power solutions
- Ultra-high peak efficiency of 97.7%
- Parallel operation with current sharing
- Quarter brick footprint




NDQ900

Ordering Information					
Vout	Iout	Input Voltage	Package size	Efficiency	Model Number
12.25 VDC	73.7 A	48 V (40 to 60 V)	Quarter brick	96.7%	NDQ900-48S12B-6LI
12.15 VDC	107 A	48 V (40 to 60 V)	Quarter brick	97.7%	NDQ1300-48S12B-6LI
12.15 VDC	132 A	48 V (40 to 60 V)	Quarter brick	97.7%	NDQ1600-48S12B-6LI

# On-Board AC-DC Distributed Architecture

- High power and high density AC-DC building blocks for quick-turn and modular power solutions
- Alternative power solutions vs. custom development approach
- No fans and high reliability (1M hours MTBF)
- Suitable for harsh temperature conditions (-40°C start-up/-20 to 100°C operating temperature)
- RTCA-DO Compliant for some AIQ/AIT models

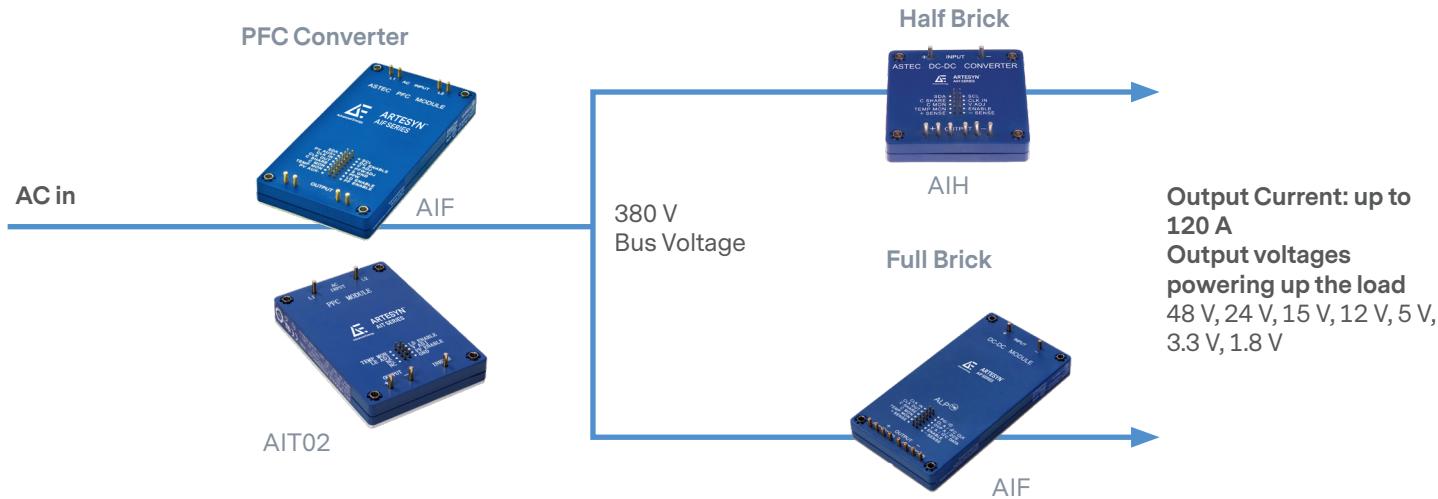

## AIF-Case-Kit

Compatible for use with full AIF PFC full brick modules to assist with radiated EMI emissions in sensitive applications.



## HIGH POWER

# Power Factor Correction (PFC)



## SPECIAL FEATURES

- 1600 W/720 W/75 W
- Unity power factor
- Universal input and frequency range
- Positive and negative enable
- Paralleling with current share
- IEC 1000-3.2 compliance
- 100°C baseplate
- Clock synch (in/out)
- Current monitoring
- Vout adjust
- On/off enable
- Remote sense
- 95% efficiency
- Fast transient response

Ordering Information						
Vout	Iout	Input Voltage	Package L x W x H (mm)	Efficiency	Model Number	
<b>PFC Module - Baseplate</b>						
380 V	4.2 A	85 to 264 VAC	4.6 x 2.4 x 0.5 in (116.84 x 60.96 x 12.7)	95%	AIF04ZPFC-01L	
380 V	4.2 A	85 to 264 VAC	4.6 x 2.4 x 0.5 in (116.84 x 60.96 x 12.7)	95%	AIF04ZPFC-02L	
393 V	0.25 A	100 to 122 VAC	2.3 x 1.45 x 0.5 in (58.42 x 36.83 x 12.7)	90%	AIQ00ZPFC-01NL	
393 V	2.08 A	85 to 264 VAC	3.5 x 2.4 x 0.5 in (88.9 x 60.96 x 12.7)	93%	AIT02ZPFC-01NL	
400 V	6 A	85 to 264 VAC	4.6 x 2.4 x 0.55 in (116.8 x 60.96 x 13.95)	97%	AIF06ZPFC-01L	
400 V	6 A	85 to 264 VAC	4.6 x 2.4 x 0.55 in (116.8 x 60.96 x 13.95)	97%	AIF06ZPFC-02L	
390 V	2.82 A	90 to 264 VAC	2.3 x 2.4 x 0.52 in (58.42 x 60.96 x 13.3)	97.3%	AIH03ZPFC-01L	

1 85°C temperature

# High Power 300 Vin



## SPECIAL FEATURES

- 300 V input (250 to 420 V PFC-ready)
- 2nd generation product
- Standard through-hole termination
- Power density > 100 W/in<sup>3</sup>
- 100°C max baseplate operating temperature
- Embedded controls on secondary side (Full- and Half-brick):
  - Temp monitor
  - Current sharing
  - Power good signal
  - Current limit & OVP adjust

300 V input 65 to 600 W output

Ordering Information						
	Vout	Iout	Input Voltage	Package L x W x H (mm)	Efficiency	Model Number
<b>Full-Brick – Baseplate</b>						
AIF 300 Vin	1.8 V	120 A	300 V (250 to 420 V)	4.6 x 2.4 x 0.5 in (116.84 x 60.96 x 12.7)	80%	AIF120Y300-L
	3.3 V	120 A	300 V (250 to 420 V)	4.6 x 2.4 x 0.5 in (116.84 x 60.96 x 12.7)	87%	AIF120F300-L
	5 V	80 A	300 V (250 to 420 V)	4.6 x 2.4 x 0.5 in (116.84 x 60.96 x 12.7)	90%	AIH80A300-L
	12 V	50 A	300 V (250 to 420 V)	4.6 x 2.4 x 0.5 in (116.84 x 60.96 x 12.7)	90%	AIF50B300-L
	15 V	40 A	300 V (250 to 420 V)	4.6 x 2.4 x 0.5 in (116.84 x 60.96 x 12.7)	90%	AIF40C300-L
	24 V	25 A	300 V (250 to 420 V)	4.6 x 2.4 x 0.5 in (116.84 x 60.96 x 12.7)	90%	AIF25H300-L
	48 V	12 A	300 V (250 to 420 V)	4.6 x 2.4 x 0.5 in (116.84 x 60.96 x 12.7)	91%	AIF12W300-L
<b>Half-Brick – Baseplate</b>						
AIH 300 Vin	1.8 V	50 A	300 V (250 to 420 V)	2.3 x 2.4 x 0.5 in (58.42 x 60.96 x 12.7)	80%	AIH50Y300-L
	3.3 V	50 A	300 V (250 to 420 V)	2.3 x 2.4 x 0.5 in (58.42 x 60.96 x 12.7)	85%	AIH50F300-L
	5 V	40 A	300 V (250 to 420 V)	2.3 x 2.4 x 0.5 in (58.42 x 60.96 x 12.7)	88%	AIH40A300-L
	12 V	20 A	300 V (250 to 420 V)	2.3 x 2.4 x 0.5 in (58.42 x 60.96 x 12.7)	90%	AIH20B300-L
	15 V	16 A	300 V (250 to 420 V)	2.3 x 2.4 x 0.5 in (58.42 x 60.96 x 12.7)	90%	AIH16C300-L
	24 V	10 A	300 V (250 to 420 V)	2.3 x 2.4 x 0.5 in (58.42 x 60.96 x 12.7)	90%	AIH10H300-L
<b>Quarter-Brick – Baseplate</b>						
AIQ 300 Vin	28 V	2.32 A	300 V (250 to 420 V)	2.3 x 1.45 x 0.5 in (58.42 x 36.83 x 12.7)	89%	AIQ02R300L

1 85°C temperature

# Full Brick AC-DC Converter

## SPECIAL FEATURES

- Fully encapsulated, baseplate cooled full brick
- 90 to 264 VAC wide input range
- High efficiency - up to 93%
- I/O isolation of 4000 VDC
- No fans and high reliability (1M hours MTBF)
- Internal inrush limiter
- Paralleling with current share
- Vout adjust
- On/off enable
- Remote sense
- Power good signal
- 8 to 11 VDC aux output
- PMBus™ compliant control and monitoring functions
- -40°C to 85°C operating temperature (100°C baseplate)
- 4.6" (L) x 2.4" (W) x 0.55" (H) (116.84 x 60.96 x 13.95 mm)
- 2 years warranty




## Ordering Information

Vout	Iout	Ripple/Noise	Output Adjustment Range	Efficiency	Model Number
<b>AIF-500 Series</b>					
12 V	42 A	120 mV pk-pk	±10% Vout (10.8 to 13.2 VDC)	93%	AIF42BAC-01NT
24 V	21 A	240 mV pk-pk	-10% to +12% Vout (21.6 to 26.88 VDC)	93%	AIF21HAC-01NT
28 V	18 A	280 mV pk-pk	-5% to +18% Vout (26.6 to 33.04 VDC)	93%	AIF18RAC-01NT
48 V	10.5 A	480 mV pk-pk	-8.3% to +17.9% Vout (44 to 56.6 VDC)	93%	AIF11WAC-01NT
48 V	12.8 A	480 mV pk-pk	-8.3% to +17.9% Vout (44 to 56.6 VDC)	93%	AIF13WAC-01NT

## AIF500-Case-Kit

Compatible for use with AIF series full brick AC-DC modules to assist with radiated EMI emissions in sensitive applications.

- Metal casing kit for all AIF AC-DC modules
- Shield and insulator provided
- Insulator material 94VTM-0
- To be placed before soldering
- Provides additional radiated EMI screening function
- UL approved materials
- 4.64" (L) x 2.44" (W) x 0.52" (H) (117.8 x 62 x 13.2 mm)

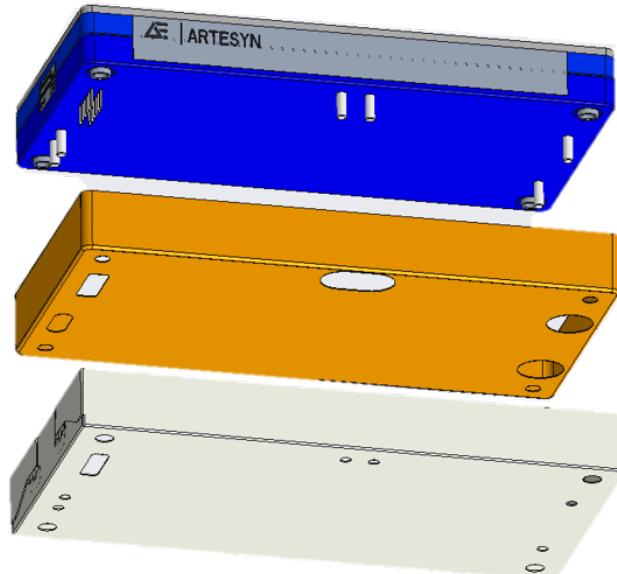

# Low Power Isolated DC-DC Product



## SPECIAL FEATURES

- Input voltages 9 to 36 V, 18 to 36 V, 18 to 75 V and 36 to 75 V
- Single and dual outputs
- Power 2 to 50 W
- Regulated outputs
- Over-current protection
- Operating temperature -40 to 71°C (ambient)
- 1500 VDC isolation
- CE Mark Safety
- UL Approval (Except AET Series)

Low Power Isolated DC-DC						
	Input Voltage	Output Voltage	Package L x W x H (mm)	I/O Isolation	Efficiency	Model Number
<b>Enclosed</b>						
3 W	4.5 to 10 VDC	3.3 V @ 0.6 A	0.55 x 0.55 x 0.31 in (14 x 14 x 8)	1500 VDC	79%	AYA01F05-L
	4.5 to 10 VDC	5 V @ 0.6 A	0.55 x 0.55 x 0.31 in (14 x 14 x 8)	1500 VDC	81%	AYA01A05-L
	4.5 to 10 VDC	12 V @ 0.25 A	0.55 x 0.55 x 0.31 in (14 x 14 x 8)	1500 VDC	85%	AYA01B05-L
	4.5 to 10 VDC	15 V @ 0.2 A	0.55 x 0.55 x 0.31 in (14 x 14 x 8)	1500 VDC	85%	AYA01C05-L
	4.5 to 10 VDC	±5 V @ 0.3 A	0.55 x 0.55 x 0.31 in (14 x 14 x 8)	1500 VDC	82%	AYA01AA05-L
	4.5 to 10 VDC	±12 V @ 0.125 A	0.55 x 0.55 x 0.31 in (14 x 14 x 8)	1500 VDC	84%	AYA01BB05-L
	4.5 to 10 VDC	±15 V @ 0.1 A	0.55 x 0.55 x 0.31 in (14 x 14 x 8)	1500 VDC	85%	AYA01CC05-L
	9 to 18 VDC	3.3 V @ 0.6 A	0.55 x 0.55 x 0.31 in (14 x 14 x 8)	1500 VDC	80%	AYA01F12-L
	9 to 18 VDC	5 V @ 0.6 A	0.55 x 0.55 x 0.31 in (14 x 14 x 8)	1500 VDC	83%	AYA01A12-L
	9 to 18 VDC	12 V @ 0.25 A	0.55 x 0.55 x 0.31 in (14 x 14 x 8)	1500 VDC	87%	AYA01B12-L
	9 to 18 VDC	15 V @ 0.2 A	0.55 x 0.55 x 0.31 in (14 x 14 x 8)	1500 VDC	87%	AYA01C12-L
	9 to 18 VDC	±5 V @ 0.3 A	0.55 x 0.55 x 0.31 in (14 x 14 x 8)	1500 VDC	84%	AYA01AA12-L
	9 to 18 VDC	±12 V @ 0.125 A	0.55 x 0.55 x 0.31 in (14 x 14 x 8)	1500 VDC	86%	AYA01BB12-L
	9 to 18 VDC	±15 V @ 0.1 A	0.55 x 0.55 x 0.31 in (14 x 14 x 8)	1500 VDC	87%	AYA01CC12-L
	9 to 36 VDC	3.3 V @ 0.6 A	0.94 x 0.54 x 0.31 in (23.8 x 13.7 x 8)	1500 VDC	75%	ATA00F18-L
	9 to 36 VDC	3.3 V @ 0.6 A	0.94 x 0.54 x 0.31 in (23.8 x 13.7 x 8) SMT	1500 VDC	75%	ATA00F18S-L
	9 to 36 VDC	5 V @ 0.6 A	0.94 x 0.54 x 0.31 in (23.8 x 13.7 x 8)	1500 VDC	78%	ATA00A18-L
	9 to 36 VDC	5 V @ 0.6 A	0.94 x 0.54 x 0.31 in (23.8 x 13.7 x 8) SMT	1500 VDC	78%	ATA00A18S-L
	9 to 36 VDC	12 V @ 0.25 A	0.94 x 0.54 x 0.31 in (23.8 x 13.7 x 8)	1500 VDC	80%	ATA00B18-L
	9 to 36 VDC	12 V @ 0.25 A	0.94 x 0.54 x 0.31 in (23.8 x 13.7 x 8) SMT	1500 VDC	80%	ATA00B18S-L
	9 to 36 VDC	15 V @ 0.2 A	0.94 x 0.54 x 0.31 in (23.8 x 13.7 x 8)	1500 VDC	80%	ATA00C18-L
	9 to 36 VDC	15 V @ 0.2 A	0.94 x 0.54 x 0.31 in (23.8 x 13.7 x 8) SMT	1500 VDC	80%	ATA00C18S-L
	9 to 36 VDC	24 V @ 0.125 A	0.94 x 0.54 x 0.31 in (23.8 x 13.7 x 8)	1500 VDC	80%	ATA00H18-L
	9 to 36 VDC	24 V @ 0.125 A	0.94 x 0.54 x 0.31 in (23.8 x 13.7 x 8) SMT	1500 VDC	80%	ATA00H18S-L
	9 to 36 VDC	±5 V @ 0.3 A	0.94 x 0.54 x 0.31 in (23.8 x 13.7 x 8)	1500 VDC	77%	ATA00AA18-L
	9 to 36 VDC	±5 V @ 0.3 A	0.94 x 0.54 x 0.31 in (23.8 x 13.7 x 8) SMT	1500 VDC	77%	ATA00AA18S-L
	9 to 36 VDC	±12 V @ 0.125 A	0.94 x 0.54 x 0.31 in (23.8 x 13.7 x 8)	1500 VDC	80%	ATA00BB18-L
	9 to 36 VDC	±12 V @ 0.125 A	0.94 x 0.54 x 0.31 in (23.8 x 13.7 x 8) SMT	1500 VDC	80%	ATA00BB18S-L

Low Power Isolated DC-DC						
	Input Voltage	Output Voltage	Package L x W x H (mm)	I/O Isolation	Efficiency	Model Number
3 W	9 to 36 VDC	±15 V @ 0.1 A	0.94 x 0.54 x 0.31 in (23.8 x 13.7 x 8)	1500 VDC	80%	ATA00CC18-L
	9 to 36 VDC	±15 V @ 0.1 A	0.94 x 0.54 x 0.31 in (23.8 x 13.7 x 8) SMT	1500 VDC	80%	ATA00CC18S-L
	18 to 36 VDC	3.3 V @ 0.6 A	0.55 x 0.55 x 0.31 in (14 x 14 x 8)	1500 VDC	80%	AYA01F24-L
	18 to 36 VDC	5 V @ 0.6 A	0.55 x 0.55 x 0.31 in (14 x 14 x 8)	1500 VDC	83%	AYA01A24-L
	18 to 36 VDC	12 V @ 0.25 A	0.55 x 0.55 x 0.31 in (14 x 14 x 8)	1500 VDC	87%	AYA01B24-L
	18 to 36 VDC	15 V @ 0.2 A	0.55 x 0.55 x 0.31 in (14 x 14 x 8)	1500 VDC	87%	AYA01C24-L
	18 to 36 VDC	±5 V @ 0.3 A	0.55 x 0.55 x 0.31 in (14 x 14 x 8)	1500 VDC	84%	AYA01AA24-L
	18 to 36 VDC	±12 V @ 0.125 A	0.55 x 0.55 x 0.31 in (14 x 14 x 8)	1500 VDC	86%	AYA01BB24-L
	18 to 36 VDC	±15 V @ 0.1 A	0.55 x 0.55 x 0.31 in (14 x 14 x 8)	1500 VDC	87%	AYA01CC24-L
	18 to 75 VDC	3.3 V @ 0.6 A	0.94 x 0.54 x 0.31 in (23.8 x 13.7 x 8)	1500 VDC	75%	ATA00F36-L
	18 to 75 VDC	3.3 V @ 0.6 A	0.94 x 0.54 x 0.31 in (23.8 x 13.7 x 8) SMT	1500 VDC	75%	ATA00F36S-L
	18 to 75 VDC	5 V @ 0.6 A	0.94 x 0.54 x 0.31 in (23.8 x 13.7 x 8)	1500 VDC	78%	ATA00A36-L
	18 to 75 VDC	5 V @ 0.6 A	0.94 x 0.54 x 0.31 in (23.8 x 13.7 x 8) SMT	1500 VDC	78%	ATA00A36S-L
	18 to 75 VDC	12 V @ 0.25 A	0.94 x 0.54 x 0.31 in (23.8 x 13.7 x 8)	1500 VDC	80%	ATA00B36-L
	18 to 75 VDC	12 V @ 0.25 A	0.94 x 0.54 x 0.31 in (23.8 x 13.7 x 8) SMT	1500 VDC	80%	ATA00B36S-L
	18 to 75 VDC	15 V @ 0.2 A	0.94 x 0.54 x 0.31 in (23.8 x 13.7 x 8)	1500 VDC	80%	ATA00C36-L
	18 to 75 VDC	15 V @ 0.2 A	0.94 x 0.54 x 0.31 in (23.8 x 13.7 x 8) SMT	1500 VDC	80%	ATA00C36S-L
	18 to 75 VDC	24 V @ 0.125 A	0.94 x 0.54 x 0.31 in (23.8 x 13.7 x 8)	1500 VDC	80%	ATA00H36-L
	18 to 75 VDC	24 V @ 0.125 A	0.94 x 0.54 x 0.31 in (23.8 x 13.7 x 8) SMT	1500 VDC	80%	ATA00H36S-L
	18 to 75 VDC	±5 V @ 0.3 A	0.94 x 0.54 x 0.31 in (23.8 x 13.7 x 8)	1500 VDC	77%	ATA00AA36-L
	18 to 75 VDC	±5 V @ 0.3 A	0.94 x 0.54 x 0.31 in (23.8 x 13.7 x 8) SMT	1500 VDC	77%	ATA00AA36S-L
	18 to 75 VDC	±12 V @ 0.125 A	0.94 x 0.54 x 0.31 in (23.8 x 13.7 x 8)	1500 VDC	80%	ATA00BB36-L
	18 to 75 VDC	±12 V @ 0.125 A	0.94 x 0.54 x 0.31 in (23.8 x 13.7 x 8) SMT	1500 VDC	80%	ATA00BB36S-L
	18 to 75 VDC	±15 V @ 0.1 A	0.94 x 0.54 x 0.31 in (23.8 x 13.7 x 8)	1500 VDC	80%	ATA00CC36-L
	18 to 75 VDC	±15 V @ 0.1 A	0.94 x 0.54 x 0.31 in (23.8 x 13.7 x 8) SMT	1500 VDC	80%	ATA00CC36S-L
	36 to 75 VDC	3.3 V @ 0.6 A	0.55 x 0.55 x 0.31 in (14 x 14 x 8)	1500 VDC	79%	AYA01F48-L
	36 to 75 VDC	5 V @ 0.6 A	0.55 x 0.55 x 0.31 in (14 x 14 x 8)	1500 VDC	82%	AYA01A48-L
	36 to 75 VDC	12 V @ 0.25 A	0.55 x 0.55 x 0.31 in (14 x 14 x 8)	1500 VDC	86%	AYA01B48-L
	36 to 75 VDC	15 V @ 0.2 A	0.55 x 0.55 x 0.31 in (14 x 14 x 8)	1500 VDC	86%	AYA01C48-L
	36 to 75 VDC	±5 V @ 0.3 A	0.55 x 0.55 x 0.31 in (14 x 14 x 8)	1500 VDC	82%	AYA01AA48-L
	36 to 75 VDC	±12 V @ 0.125 A	0.55 x 0.55 x 0.31 in (14 x 14 x 8)	1500 VDC	85%	AYA01BB48-L
	36 to 75 VDC	±15 V @ 0.1 A	0.55 x 0.55 x 0.31 in (14 x 14 x 8)	1500 VDC	85%	AYA01CC48-L

## LOW POWER ISOLATED DC-DC PRODUCT

Low Power Isolated DC-DC						
	Input Voltage	Output Voltage	Package L x W x H (mm)	I/O Isolation	Efficiency	Model Number
<b>Enclosed</b>						
6 W	9 to 36 VDC	3.3 V @ 1.2 A	0.942 x 0.54 x 0.31 in (23.8 x 13.7 x 8)	1500 VDC	78%	ATA01F18-L
	9 to 36 VDC	3.3 V @ 1.2 A	DIP 1.25 x 0.8 x 0.4 in (31.75 x 20.32 x 10.16)	1500 VDC	78%	ASA01F18-LS
	9 to 36 VDC	5 V @ 1 A	DIP 1.25 x 0.8 x 0.4 in (31.75 x 20.32 x 10.16)	1500 VDC	81%	ASA01A18-LS
	9 to 36 VDC	5 V @ 1.2 A	0.942 x 0.54 x 0.31 in (23.8 x 13.7 x 8)	1500 VDC	82%	ATA01A18-L
	9 to 36 VDC	5 V @ ±0.5 A	DIP 1.25 x 0.8 x 0.4 in (31.75 x 20.32 x 10.16)	1500 VDC	81%	ASA00AA18-LS
	9 to 36 VDC	15 V @ 0.4 A	DIP 1.25 x 0.8 x 0.4 in (31.75 x 20.32 x 10.16)	1500 VDC	83%	ASA00C18-LS
	9 to 36 VDC	12 V @ 0.5 A	0.942 x 0.54 x 0.31 in (23.8 x 13.7 x 8)	1500 VDC	85%	ATA01B18-L
	9 to 36 VDC	12 V @ 0.5 A	DIP 1.25 x 0.8 x 0.4 in (31.75 x 20.32 x 10.16)	1500 VDC	82%	ASA00B18-LS
	9 to 36 VDC	12 V @ ±0.25 A	DIP 1.25 x 0.8 x 0.4 in (31.75 x 20.32 x 10.16)	1500 VDC	82%	ASA00BB18-LS
	9 to 36 VDC	15 V @ 0.4 A	0.942 x 0.54 x 0.31 in (23.8 x 13.7 x 8)	1500 VDC	85%	ATA01C18-L
	9 to 36 VDC	15 V @ ±0.2 A	DIP 1.25 x 0.8 x 0.4 in (31.75 x 20.32 x 10.16)	1500 VDC	83%	ASA00CC18-LS
	9 to 36 VDC	24 V @ 0.25 A	0.942 x 0.54 x 0.31 in (23.8 x 13.7 x 8)	1500 VDC	86%	ATA01H18-L
	9 to 36 VDC	±12 V @ 0.25 A	0.942 x 0.54 x 0.31 in (23.8 x 13.7 x 8)	1500 VDC	85%	ATA01BB18-L
	9 to 36 VDC	±15 V @ 0.2 A	0.942 x 0.54 x 0.31 in (23.8 x 13.7 x 8)	1500 VDC	86%	ATA01CC18-L
	18 to 75 VDC	3.3 V @ 1.2 A	0.942 x 0.54 x 0.31 in (23.8 x 13.7 x 8)	1500 VDC	78%	ATA01F36-L
	18 to 75 VDC	3.3 V @ 1.2 A	DIP 1.25 x 0.8 x 0.4 in (31.75 x 20.32 x 10.16)	1500 VDC	78%	ASA01F36-LS
	18 to 75 VDC	5 V @ 1 A	DIP 1.25 x 0.8 x 0.4 in (31.75 x 20.32 x 10.16)	1500 VDC	81%	ASA01A36-LS
	18 to 75 VDC	5 V @ 1.2 A	0.942 x 0.54 x 0.31 in (23.8 x 13.7 x 8)	1500 VDC	82%	ATA01A36-L
	18 to 75 VDC	5 V @ ±0.5 A	DIP 1.25 x 0.8 x 0.4 in (31.75 x 20.32 x 10.16)	1500 VDC	81%	ASA00AA36-LS
	18 to 75 VDC	12 V @ 0.5 A	0.942 x 0.54 x 0.31 in (23.8 x 13.7 x 8)	1500 VDC	85%	ATA01B36-L
	18 to 75 VDC	12 V @ 0.5 A	DIP 1.25 x 0.8 x 0.4 in (31.75 x 20.32 x 10.16)	1500 VDC	82%	ASA00B36-LS
	18 to 75 VDC	12 V @ ±0.25 A	DIP 1.25 x 0.8 x 0.4 in (31.75 x 20.32 x 10.16)	1500 VDC	82%	ASA00BB36-LS
	18 to 75 VDC	15 V @ 0.4 A	0.942 x 0.54 x 0.31 in (23.8 x 13.7 x 8)	1500 VDC	85%	ATA01C36-L
	18 to 75 VDC	15 V @ 0.4 A	DIP 1.25 x 0.8 x 0.4 in (31.75 x 20.32 x 10.16)	1500 VDC	83%	ASA00C36-LS
	18 to 75 VDC	15 V @ ±0.2 A	DIP 1.25 x 0.8 x 0.4 in (31.75 x 20.32 x 10.16)	1500 VDC	83%	ASA00CC36-LS
	18 to 75 VDC	24 V @ 0.25 A	0.942 x 0.54 x 0.31 in (23.8 x 13.7 x 8)	1500 VDC	86%	ATA01H36-L
	18 to 75 VDC	±12 V @ 0.25 A	0.942 x 0.54 x 0.31 in (23.8 x 13.7 x 8)	1500 VDC	85%	ATA01BB36-L
	18 to 75 VDC	±15 V @ 0.2 A	0.942 x 0.54 x 0.31 in (23.8 x 13.7 x 8)	1500 VDC	86%	ATA01CC36-L
<b>Enclosed</b>						
8 W	9 to 36 VDC	3.3 V @ 2 A	0.942 x 0.54 x 0.31 in (23.8 x 13.7 x 8)	1500 VDC	78%	ATA02F18-L
	9 to 36 VDC	5 V @ 1.6 A	0.942 x 0.54 x 0.31 in (23.8 x 13.7 x 8)	1500 VDC	82%	ATA02A18-L
	9 to 36 VDC	12 V @ 0.665 A	0.942 x 0.54 x 0.31 in (23.8 x 13.7 x 8)	1500 VDC	85%	ATA02B18-L
	9 to 36 VDC	15 V @ 0.535 A	0.942 x 0.54 x 0.31 in (23.8 x 13.7 x 8)	1500 VDC	85%	ATA02C18-L
	9 to 36 VDC	24 V @ 0.335 A	0.942 x 0.54 x 0.31 in (23.8 x 13.7 x 8)	1500 VDC	86%	ATA02H18-L
	9 to 36 VDC	±12 V @ 0.335 A	0.942 x 0.54 x 0.31 in (23.8 x 13.7 x 8)	1500 VDC	85%	ATA02BB18-L
	9 to 36 VDC	±15 V @ 0.265 A	0.942 x 0.54 x 0.31 in (23.8 x 13.7 x 8)	1500 VDC	86%	ATA02CC18-L
	18 to 75 VDC	3.3 V @ 2 A	0.942 x 0.54 x 0.31 in (23.8 x 13.7 x 8)	1500 VDC	78%	ATA02F36-L
	18 to 75 VDC	5 V @ 1.6 A	0.942 x 0.54 x 0.31 in (23.8 x 13.7 x 8)	1500 VDC	82%	ATA02A36-L
	18 to 75 VDC	12 V @ 0.665 A	0.942 x 0.54 x 0.31 in (23.8 x 13.7 x 8)	1500 VDC	85%	ATA02B36-L
	18 to 75 VDC	15 V @ 0.535 A	0.942 x 0.54 x 0.31 in (23.8 x 13.7 x 8)	1500 VDC	85%	ATA02C36-L
	18 to 75 VDC	24 V @ 0.335 A	0.942 x 0.54 x 0.31 in (23.8 x 13.7 x 8)	1500 VDC	86%	ATA02H36-L
	18 to 75 VDC	±12 V @ 0.335 A	0.942 x 0.54 x 0.31 in (23.8 x 13.7 x 8)	1500 VDC	85%	ATA02BB36-L
	18 to 75 VDC	±15 V @ 0.265 A	0.942 x 0.54 x 0.31 in (23.8 x 13.7 x 8)	1500 VDC	86%	ATA02CC36-L

Low Power Isolated DC-DC						
	Input Voltage	Output Voltage	Package L x W x H (mm)	I/O Isolation	Efficiency	Model Number
<b>Enclosed</b>						
10 W	9 to 36 VDC	3.3 V @ 2.2 A	1 x 1 x 0.4 in (25.4 x 25.4 x 10.16)	1500 VDC	86%	AXA02F18-L
	9 to 36 VDC	3.3 V @ 2.7 A	0.942 x 0.54 x 0.31 in (23.8 x 13.7 x 8)	1500 VDC	80%	ATA03F18-L
	9 to 36 VDC	5 V @ 2 A	0.942 x 0.54 x 0.31 in (23.8 x 13.7 x 8)	1500 VDC	87%	ATA03B18-L
	9 to 36 VDC	5 V @ 2 A	1 x 1 x 0.4 in (25.4 x 25.4 x 10.16)	1500 VDC	84%	AXA02A18-L
	9 to 36 VDC	12 V @ 0.83 A	1 x 1 x 0.4 in (25.4 x 25.4 x 10.16)	1500 VDC	86%	AXA00B18-L
	9 to 36 VDC	12 V @ 0.833 A	0.942 x 0.54 x 0.31 in (23.8 x 13.7 x 8)	1500 VDC	88%	ATA03H18-L
	9 to 36 VDC	15 V @ 0.66 A	1 x 1 x 0.4 in (25.4 x 25.4 x 10.16)	1500 VDC	87%	AXA00C18-L
	9 to 36 VDC	15 V @ 0.666 A	0.942 x 0.54 x 0.31 in (23.8 x 13.7 x 8)	1500 VDC	83%	ATA03A36-L
	9 to 36 VDC	24 V @ 0.41 A	1 x 1 x 0.4 in (25.4 x 25.4 x 10.16)	1500 VDC	86%	AXA000H18-L
	9 to 36 VDC	24 V @ 0.416 A	0.942 x 0.54 x 0.31 in (23.8 x 13.7 x 8)	1500 VDC	87%	ATA03BB36-L
	9 to 36 VDC	±5 V @ ±1 A	1 x 1 x 0.4 in (25.4 x 25.4 x 10.16)	1500 VDC	84%	AXA00AA18-L
	9 to 36 VDC	±12 V @ 0.416 A	0.942 x 0.54 x 0.31 in (23.8 x 13.7 x 8)	1500 VDC	87%	ATA03CC18-L
	9 to 36 VDC	±12 V @ ±0.41 A	1 x 1 x 0.4 in (25.4 x 25.4 x 10.16)	1500 VDC	86%	AXA000BB18-L
	9 to 36 VDC	±15 V @ 0.333 A	0.942 x 0.54 x 0.31 in (23.8 x 13.7 x 8)	1500 VDC	88%	ATA03C36-L
	9 to 36 VDC	±15 V @ ±0.33 A	1 x 1 x 0.4 in (25.4 x 25.4 x 10.16)	1500 VDC	87%	AXA000CC18-L
	18 to 36 VDC	2.5 V @ 3 A	DIP 1.25 x 0.8 x 0.4 in (31.75 x 20.32 x 10.16)	1500 VDC	77%	ASA03G24-LS
	18 to 36 VDC	3.3 V @ 3 A	DIP 1.25 x 0.8 x 0.4 in (31.75 x 20.32 x 10.16)	1500 VDC	79%	ASA03F24-LS
	18 to 36 VDC	5 V @ 2 A	DIP 1.25 x 0.8 x 0.4 in (31.75 x 20.32 x 10.16)	1500 VDC	82%	ASA02A24-LS
	18 to 36 VDC	12 V @ 0.835 A	DIP 1.25 x 0.8 x 0.4 in (31.75 x 20.32 x 10.16)	1500 VDC	83%	ASA00B24-LS
	18 to 75 VDC	3.3 V @ 2.2 A	1 x 1 x 0.4 in (25.4 x 25.4 x 10.16)	1500 VDC	86%	AXA02F36-L
	18 to 75 VDC	3.3 V @ 2.7 A	0.942 x 0.54 x 0.31 in (23.8 x 13.7 x 8)	1500 VDC	83%	ATA03A18-L
	18 to 75 VDC	5 V @ 2 A	0.942 x 0.54 x 0.31 in (23.8 x 13.7 x 8)	1500 VDC	88%	ATA03C18-L
	18 to 75 VDC	5 V @ 2 A	1 x 1 x 0.4 in (25.4 x 25.4 x 10.16)	1500 VDC	84%	AXA02A36-L
	18 to 75 VDC	12 V @ 0.83 A	1 x 1 x 0.4 in (25.4 x 25.4 x 10.16)	1500 VDC	86%	AXA00B36-L
	18 to 75 VDC	12 V @ 0.833 A	0.942 x 0.54 x 0.31 in (23.8 x 13.7 x 8)	1500 VDC	87%	ATA03BB18-L
	18 to 75 VDC	15 V @ 0.66 A	1 x 1 x 0.4 in (25.4 x 25.4 x 10.16)	1500 VDC	87%	AXA00C36-L
	18 to 75 VDC	15 V @ 0.666 A	0.942 x 0.54 x 0.31 in (23.8 x 13.7 x 8)	1500 VDC	87%	ATA03B36-L
	18 to 75 VDC	24 V @ 0.41 A	1 x 1 x 0.4 in (25.4 x 25.4 x 10.16)	1500 VDC	86%	AXA000H36-L
	18 to 75 VDC	24 V @ 0.416 A	0.942 x 0.54 x 0.31 in (23.8 x 13.7 x 8)	1500 VDC	87%	ATA03CC36-L
	18 to 75 VDC	±5 V @ ±1 A	1 x 1 x 0.4 in (25.4 x 25.4 x 10.16)	1500 VDC	84%	AXA00AA36-L
	18 to 75 VDC	±12 V @ 0.416 A	0.942 x 0.54 x 0.31 in (23.8 x 13.7 x 8)	1500 VDC	80%	ATA03F36-L
	18 to 75 VDC	±12 V @ ±0.41 A	1 x 1 x 0.4 in (25.4 x 25.4 x 10.16)	1500 VDC	86%	AXA000BB36-L
	18 to 75 VDC	±15 V @ 0.333 A	0.942 x 0.54 x 0.31 in (23.8 x 13.7 x 8)	1500 VDC	88%	ATA03H36-L
	18 to 75 VDC	±15 V @ ±0.33 A	1 x 1 x 0.4 in (25.4 x 25.4 x 10.16)	1500 VDC	87%	AXA000CC36-L
	36 to 75 VDC	2.5 V @ 3 A	DIP 1.25 x 0.8 x 0.4 in (31.75 x 20.32 x 10.16)	1500 VDC	87%	ASA03G48-LS
	36 to 75 VDC	3.3 V @ 3 A	DIP 1.25 x 0.8 x 0.4 in (31.75 x 20.32 x 10.16)	1500 VDC	79%	ASA03F48-LS
	36 to 75 VDC	5 V @ 2 A	DIP 1.25 x 0.8 x 0.4 in (31.75 x 20.32 x 10.16)	1500 VDC	82%	ASA02A48-LS
	36 to 75 VDC	12 V @ 0.835 A	DIP 1.25 x 0.8 x 0.4 in (31.75 x 20.32 x 10.16)	1500 VDC	83%	ASA00B48-LS

## LOW POWER ISOLATED DC-DC PRODUCT

Low Power Isolated DC-DC						
	Input Voltage	Output Voltage	Package L x W x H (mm)	I/O Isolation	Efficiency	Model Number
<b>Enclosed</b>						
15 W	9 to 36 VDC	3.3 V @ 4 A	1 x 2 x 0.44 in (25.4 x 50.8 x 11.30)	1500 VDC	80%	AEE04F18-LS
	9 to 36 VDC	5 V @ 3 A	1 x 2 x 0.44 in (25.4 x 50.8 x 11.30)	1500 VDC	84%	AEE03A18-LS
	9 to 36 VDC	12 V @ 1.25 A	1 x 2 x 0.44 in (25.4 x 50.8 x 11.30)	1500 VDC	84%	AEE01B18-LS
	9 to 36 VDC	15 V @ 1 A	1 x 2 x 0.44 in (25.4 x 50.8 x 11.30)	1500 VDC	84%	AEE01C18-LS
	9 to 36 VDC	5 V @ ±1.5 A	1 x 2 x 0.44 in (25.4 x 50.8 x 11.30)	1500 VDC	79%	AEE01AA18-LS
	9 to 36 VDC	12 V @ ±0.625 A	1 x 2 x 0.44 in (25.4 x 50.8 x 11.30)	1500 VDC	83%	AEE00BB18-LS
	9 to 36 VDC	15 V @ ±0.5 A	1 x 2 x 0.44 in (25.4 x 50.8 x 11.30)	1500 VDC	83%	AEE00CC18-LS
	18 to 75 VDC	3.3 V @ 4 A	1 x 2 x 0.44 in (25.4 x 50.8 x 11.30)	1500 VDC	80%	AEE04F36-LS
	18 to 75 VDC	5 V @ 3 A	1 x 2 x 0.44 in (25.4 x 50.8 x 11.30)	1500 VDC	84%	AEE03A36-LS
	18 to 75 VDC	12 V @ 1.25 A	1 x 2 x 0.44 in (25.4 x 50.8 x 11.30)	1500 VDC	84%	AEE01B36-LS
	18 to 75 VDC	15 V @ 1 A	1 x 2 x 0.44 in (25.4 x 50.8 x 11.30)	1500 VDC	84%	AEE01C36-LS
	18 to 75 VDC	5 V @ ±1.5 A	1 x 2 x 0.44 in (25.4 x 50.8 x 11.30)	1500 VDC	79%	AEE01AA36-LS
	18 to 75 VDC	12 V @ ±0.625 A	1 x 2 x 0.44 in (25.4 x 50.8 x 11.30)	1500 VDC	83%	AEE00BB36-LS
	18 to 75 VDC	15 V @ ±0.5 A	1 x 2 x 0.44 in (25.4 x 50.8 x 11.30)	1500 VDC	83%	AEE00CC36-LS
<b>Isolated</b>						
20 W	9 to 36 VDC	3.3 V @ 4.5 A	1 x 1 x 0.4 in (25.4 x 25.4 x 10.16)	1500 VDC	87%	AXA04F18-L
	9 to 36 VDC	5 V @ 4 A	1 x 1 x 0.4 in (25.4 x 25.4 x 10.16)	1500 VDC	89%	AXA04A18-L
	9 to 36 VDC	12 V @ 1.67 A	1 x 1 x 0.4 in (25.4 x 25.4 x 10.16)	1500 VDC	89%	AXA01B18-L
	9 to 36 VDC	15 V @ 1.33 A	1 x 1 x 0.4 in (25.4 x 25.4 x 10.16)	1500 VDC	89%	AXA01C18-L
	9 to 36 VDC	24 V @ 0.835 A	1 x 1 x 0.4 in (25.4 x 25.4 x 10.16)	1500 VDC	88%	AXA00H18-L
	9 to 36 VDC	±12 V @ 0.835 A	1 x 1 x 0.4 in (25.4 x 25.4 x 10.16)	1500 VDC	89%	AXA00BB18-L
	9 to 36 VDC	±15 V @ 0.67 A	1 x 1 x 0.4 in (25.4 x 25.4 x 10.16)	1500 VDC	89%	AXA00CC18-L
	18 to 75 VDC	2.5 V @ 6 A	1.6 x 2 x 0.48 in (40.6 x 50.8 x 12.19)	1500 VDC	79%	AET06G36-L
	18 to 75 VDC	3.3 V @ 4.5 A	1 x 1 x 0.4 in (25.4 x 25.4 x 10.16)	1500 VDC	88%	AXA04F36-L
	18 to 75 VDC	3.3 V @ 6 A	1.6 x 2 x 0.48 in (40.6 x 50.8 x 12.19)	1500 VDC	83%	AET06F36-L
	18 to 75 VDC	5 V @ 4 A	1 x 1 x 0.4 in (25.4 x 25.4 x 10.16)	1500 VDC	89%	AXA04A36-L
	18 to 75 VDC	5 V @ 4 A	1.6 x 2 x 0.48 in (40.6 x 50.8 x 12.19)	1500 VDC	84%	AET04A36-L
	18 to 75 VDC	5 V @ ±2 A	1.6 x 2 x 0.48 in (40.6 x 50.8 x 12.19)	1500 VDC	84%	AET02AA36-L
	18 to 75 VDC	12 V @ 1.67 A	1 x 1 x 0.4 in (25.4 x 25.4 x 10.16)	1500 VDC	89%	AXA01B36-L
	18 to 75 VDC	12 V @ 1.67 A	1.6 x 2 x 0.48 in (40.6 x 50.8 x 12.19)	1500 VDC	85%	AET01B36-L
	18 to 75 VDC	12 V @ ±0.835 A	1.6 x 2 x 0.48 in (40.6 x 50.8 x 12.19)	1500 VDC	85%	AET00BB36-L
	18 to 75 VDC	15 V @ 1.33 A	1 x 1 x 0.4 in (25.4 x 25.4 x 10.16)	1500 VDC	89%	AXA01C36-L
	18 to 75 VDC	15 V @ 1.33 A	1.6 x 2 x 0.48 in (40.6 x 50.8 x 12.19)	1500 VDC	85%	AET01C36-L
	18 to 75 VDC	15 V @ ±0.665 A	1.6 x 2 x 0.48 in (40.6 x 50.8 x 12.19)	1500 VDC	85%	AET00CC36-L
	18 to 75 VDC	24 V @ 0.835 A	1 x 1 x 0.4 in (25.4 x 25.4 x 10.16)	1500 VDC	88%	AXA00H36-L
	18 to 75 VDC	±12 V @ 0.835 A	1 x 1 x 0.4 in (25.4 x 25.4 x 10.16)	1500 VDC	89%	AXA00BB36-L
	18 to 75 VDC	±15 V @ 0.67 A	1 x 1 x 0.4 in (25.4 x 25.4 x 10.16)	1500 VDC	89%	AXA00CC36-L

Low Power Isolated DC-DC						
	Input Voltage	Output Voltage	Package L x W x H (mm)	I/O Isolation	Efficiency	Model Number
<b>Enclosed</b>						
20 W	9 to 36 VDC	2.5 V @ 6 A	1.6 x 2 x 0.48 in (40.6 x 50.8 x 12.19)	1500 VDC	79%	AET06G18-L
	9 to 36 VDC	3.3 V @ 6 A	1.6 x 2 x 0.48 in (40.6 x 50.8 x 12.19)	1500 VDC	83%	AET06F18-L
	9 to 36 VDC	5 V @ 4 A	1.6 x 2 x 0.48 in (40.6 x 50.8 x 12.19)	1500 VDC	84%	AET04A18-L
	9 to 36 VDC	5 V @ ±2 A	1.6 x 2 x 0.48 in (40.6 x 50.8 x 12.19)	1500 VDC	84%	AET02AA18-L
	9 to 36 VDC	12 V @ 1.67 A	1.6 x 2 x 0.48 in (40.6 x 50.8 x 12.19)	1500 VDC	85%	AET01B18-L
	9 to 36 VDC	12 V @ ±0.835 A	1.6 x 2 x 0.48 in (40.6 x 50.8 x 12.19)	1500 VDC	85%	AET00BB18-L
	9 to 36 VDC	15 V @ 1.33 A	1.6 x 2 x 0.48 in (40.6 x 50.8 x 12.19)	1500 VDC	85%	AET01C18-L
	9 to 36 VDC	15 V @ ±0.665 A	1.6 x 2 x 0.48 in (40.6 x 50.8 x 12.19)	1500 VDC	85%	AET00CC18-L
<b>Enclosed</b>						
25 W	9 to 36 VDC	3.3 V @ 6 A	1 x 1 x 0.4 in (25.4 x 25.4 x 10.16)	1500 VDC	87%	AXA06F18-L
	9 to 36 VDC	5 V @ 5 A	1 x 1 x 0.4 in (25.4 x 25.4 x 10.16)	1500 VDC	89%	AXA05A18-L
	9 to 36 VDC	12 V @ 2.09 A	1 x 1 x 0.4 in (25.4 x 25.4 x 10.16)	1500 VDC	89%	AXA02B18-L
	9 to 36 VDC	15 V @ 1.67 A	1 x 1 x 0.4 in (25.4 x 25.4 x 10.16)	1500 VDC	90%	AXA02C18-L
	9 to 36 VDC	±12 V @ 1.04 A	1 x 1 x 0.4 in (25.4 x 25.4 x 10.16)	1500 VDC	89%	AXA01BB18-L
	9 to 36 VDC	±15 V @ 0.84 A	1 x 1 x 0.4 in (25.4 x 25.4 x 10.16)	1500 VDC	89%	AXA01CC18-L
	18 to 75 VDC	3.3 V @ 6 A	1 x 1 x 0.4 in (25.4 x 25.4 x 10.16)	1500 VDC	88%	AXA06F36-L
	18 to 75 VDC	5 V @ 5 A	1 x 1 x 0.4 in (25.4 x 25.4 x 10.16)	1500 VDC	90%	AXA05A36-L
	18 to 75 VDC	12 V @ 2.09 A	1 x 1 x 0.4 in (25.4 x 25.4 x 10.16)	1500 VDC	90%	AXA02B36-L
	18 to 75 VDC	15 V @ 1.67 A	1 x 1 x 0.4 in (25.4 x 25.4 x 10.16)	1500 VDC	90%	AXA02C36-L
	18 to 75 VDC	±12 V @ 1.04 A	1 x 1 x 0.4 in (25.4 x 25.4 x 10.16)	1500 VDC	89%	AXA01BB36-L
	18 to 75 VDC	±15 V @ 0.84 A	1 x 1 x 0.4 in (25.4 x 25.4 x 10.16)	1500 VDC	89%	AXA01CC36-L
<b>Enclosed</b>						
30 W	9 to 36 VDC	2.5 V @ 8 A	1.6 x 2 x 0.48 in (40.6 x 50.8 x 12.19)	1500 VDC	79%	AET08G18-L
	9 to 36 VDC	3.3 V @ 7 A	1.6 x 2 x 0.48 in (40.6 x 50.8 x 12.19)	1500 VDC	82%	AET07F18-L
	9 to 36 VDC	5 V @ 6 A	1.6 x 2 x 0.48 in (40.6 x 50.8 x 12.19)	1500 VDC	84%	AET06A18-L
	9 to 36 VDC	12 V @ 2.5 A	1.6 x 2 x 0.48 in (40.6 x 50.8 x 12.19)	1500 VDC	85%	AET02B18-L
	9 to 36 VDC	15 V @ 2 A	1.6 x 2 x 0.48 in (40.6 x 50.8 x 12.19)	1500 VDC	85%	AET02C18-L
	9 to 36 VDC	12 V @ ±1.25 A	1.6 x 2 x 0.48 in (40.6 x 50.8 x 12.19)	1500 VDC	85%	AET01BB18-L
	9 to 36 VDC	15 V @ ±1 A	1.6 x 2 x 0.48 in (40.6 x 50.8 x 12.19)	1500 VDC	85%	AET01CC18-L
	18 to 75 VDC	2.5 V @ 8 A	1.6 x 2 x 0.48 in (40.6 x 50.8 x 12.19)	1500 VDC	79%	AET08G36-L
	18 to 75 VDC	3.3 V @ 7 A	1.6 x 2 x 0.48 in (40.6 x 50.8 x 12.19)	1500 VDC	82%	AET07F36-L
	18 to 75 VDC	5 V @ 6 A	1.6 x 2 x 0.48 in (40.6 x 50.8 x 12.19)	1500 VDC	84%	AET06A36-L
	18 to 75 VDC	12 V @ 2.5 A	1.6 x 2 x 0.48 in (40.6 x 50.8 x 12.19)	1500 VDC	85%	AET02B36-L
	18 to 75 VDC	15 V @ 2 A	1.6 x 2 x 0.48 in (40.6 x 50.8 x 12.19)	1500 VDC	85%	AET02C36-L
	18 to 75 VDC	12 V @ ±1.25 A	1.6 x 2 x 0.48 in (40.6 x 50.8 x 12.19)	1500 VDC	85%	AET01BB36-L
	18 to 75 VDC	15 V @ ±1 A	1.6 x 2 x 0.48 in (40.6 x 50.8 x 12.19)	1500 VDC	85%	AET01CC36-L

## LOW POWER ISOLATED DC-DC PRODUCT

Low Power Isolated DC-DC						
	Input Voltage	Output Voltage	Package L x W x H (mm)	I/O Isolation	Efficiency	Model Number
<b>Enclosed</b>						
40 W	9 to 36 VDC	3.3 V @ 8 A	2 X 1 X 0.4 in (25.4 X 50.8 X 10.2)	1500 VDC	89%	AEE08F18-L
	9 to 36 VDC	5 V @ 8 A	2 X 1 X 0.4 in (25.4 X 50.8 X 10.2)	1500 VDC	90%	AEE08A18-L
	9 to 36 VDC	12 V @ 3.33 A	2 X 1 X 0.4 in (25.4 X 50.8 X 10.2)	1500 VDC	89%	AEE03B18-L
	9 to 36 VDC	15 V @ 2.67 A	2 X 1 X 0.4 in (25.4 X 50.8 X 10.2)	1500 VDC	89%	AEE02C18-L
	9 to 36 VDC	24 V @ 1.67 A	2 X 1 X 0.4 in (25.4 X 50.8 X 10.2)	1500 VDC	91%	AEE01H18-L
	9 to 36 VDC	±12 V @ 1.67 A	2 X 1 X 0.4 in (25.4 X 50.8 X 10.2)	1500 VDC	88%	AEE01BB18-L
	9 to 36 VDC	±15 V @ 1.67 A	2 X 1 X 0.4 in (25.4 X 50.8 X 10.2)	1500 VDC	88%	AEE01CC18-L
	18 to 75 VDC	3.3 V @ 8 A	2 X 1 X 0.4 in (25.4 X 50.8 X 10.2)	1500 VDC	89%	AEE08F36-L
	18 to 75 VDC	5 V @ 8 A	2 X 1 X 0.4 in (25.4 X 50.8 X 10.2)	1500 VDC	90%	AEE08A36-L
	18 to 75 VDC	12 V @ 3.33 A	2 X 1 X 0.4 in (25.4 X 50.8 X 10.2)	1500 VDC	90%	AEE03B36-L
	18 to 75 VDC	15 V @ 2.67 A	2 X 1 X 0.4 in (25.4 X 50.8 X 10.2)	1500 VDC	90%	AEE02C36-L
	18 to 75 VDC	24 V @ 1.67 A	2 X 1 X 0.4 in (25.4 X 50.8 X 10.2)	1500 VDC	91%	AEE01H36-L
	18 to 75 VDC	±12 V @ 1.67 A	2 X 1 X 0.4 in (25.4 X 50.8 X 10.2)	1500 VDC	88%	AEE01BB36-L
	18 to 75 VDC	±15 V @ 1.67 A	2 X 1 X 0.4 in (25.4 X 50.8 X 10.2)	1500 VDC	88%	AEE01CC36-L
<b>Enclosed</b>						
50 W	9 to 36 VDC	3.3 V @ 10 A	2 X 1 X 0.4 in (25.4 X 50.8 X 10.2)	1500 VDC	90%	AEE10F18-L
	9 to 36 VDC	5 V @ 10 A	2 X 1 X 0.4 in (25.4 X 50.8 X 10.2)	1500 VDC	91%	AEE10A18-L
	9 to 36 VDC	12 V @ 4.17 A	2 X 1 X 0.4 in (25.4 X 50.8 X 10.2)	1500 VDC	92%	AEE04B18-L
	9 to 36 VDC	15 V @ 3.33 A	2 X 1 X 0.4 in (25.4 X 50.8 X 10.2)	1500 VDC	92%	AEE03C18-L
	9 to 36 VDC	24 V @ 2.08 A	2 X 1 X 0.4 in (25.4 X 50.8 X 10.2)	1500 VDC	91%	AEE02H18-L
	18 to 75 VDC	3.3 V @ 10 A	2 X 1 X 0.4 in (25.4 X 50.8 X 10.2)	1500 VDC	90%	AEE10F36-L
	18 to 75 VDC	5 V @ 10 A	2 X 1 X 0.4 in (25.4 X 50.8 X 10.2)	1500 VDC	91%	AEE10A36-L
	18 to 75 VDC	12 V @ 4.17 A	2 X 1 X 0.4 in (25.4 X 50.8 X 10.2)	1500 VDC	92%	AEE04B36-L
	18 to 75 VDC	15 V @ 3.33 A	2 X 1 X 0.4 in (25.4 X 50.8 X 10.2)	1500 VDC	92%	AEE03C36-L
	18 to 75 VDC	24 V @ 2.08 A	2 X 1 X 0.4 in (25.4 X 50.8 X 10.2)	1500 VDC	91%	AEE02H36-L

# DC-DC Converter for Railway Applications



## DC-DC Converter for Railway Applications

	Input Voltage	Output	Package (mm)	I/O Isolation	Efficiency	Model Number
10 W	24 (9 to 36 V)	5 V @ 2 A	2 x 1 x 0.43 in (50.8 x 25.4 x 11)	3000 VAC rms	84%	ERM02A18
	24 (9 to 36 V)	12 V @ 0.83 A	2 x 1 x 0.43 in (50.8 x 25.4 x 11)	3000 VAC rms	86%	ERM00B18
	24 (9 to 36 V)	15 V @ 0.67 A	2 x 1 x 0.43 in (50.8 x 25.4 x 11)	3000 VAC rms	86%	ERM00C18
	24 (9 to 36 V)	24 V @ 0.41 A	2 x 1 x 0.43 in (50.8 x 25.4 x 11)	3000 VAC rms	85%	ERM00H18
	24 (9 to 36 V)	±12 V @ 0.417 A	2 x 1 x 0.43 in (50.8 x 25.4 x 11)	3000 VAC rms	86%	ERM00BB18
	24 (9 to 36 V)	±15 V @ 0.335 A	2 x 1 x 0.43 in (50.8 x 25.4 x 11)	3000 VAC rms	87%	ERM00CC18
	48 (18 to 75 V)	5 V @ 2 A	2 x 1 x 0.43 in (50.8 x 25.4 x 11)	3000 VAC rms	84%	ERM02A36
	48 (18 to 75 V)	12 V @ 0.83 A	2 x 1 x 0.43 in (50.8 x 25.4 x 11)	3000 VAC rms	86%	ERM00B36
	48 (18 to 75 V)	15 V @ 0.67 A	2 x 1 x 0.43 in (50.8 x 25.4 x 11)	3000 VAC rms	86%	ERM00C36
	48 (18 to 75 V)	24 V @ 0.41 A	2 x 1 x 0.43 in (50.8 x 25.4 x 11)	3000 VAC rms	85%	ERM00H36
	48 (18 to 75 V)	±12 V @ 0.417 A	2 x 1 x 0.43 in (50.8 x 25.4 x 11)	3000 VAC rms	89%	ERM00BB36
	48 (18 to 75 V)	±15 V @ 0.335 A	2 x 1 x 0.43 in (50.8 x 25.4 x 11)	3000 VAC rms	88%	ERM00CC36
	72, 110 (40 to 160 V)	5 V @ 2 A	2 x 1 x 0.43 in (50.8 x 25.4 x 11)	3000 VAC rms	82%	ERM02A110
	72, 110 (40 to 160 V)	12 V @ 0.83 A	2 x 1 x 0.43 in (50.8 x 25.4 x 11)	3000 VAC rms	85%	ERM00B110
	72, 110 (40 to 160 V)	15 V @ 0.67 A	2 x 1 x 0.43 in (50.8 x 25.4 x 11)	3000 VAC rms	85%	ERM00C110
	72, 110 (40 to 160 V)	24 V @ 0.41 A	2 x 1 x 0.43 in (50.8 x 25.4 x 11)	3000 VAC rms	84%	ERM00H110
	72, 110 (40 to 160 V)	±12 V @ 0.417 A	2 x 1 x 0.43 in (50.8 x 25.4 x 11)	3000 VAC rms	86%	ERM00BB110
	72, 110 (40 to 160 V)	±15 V @ 0.335 A	2 x 1 x 0.43 in (50.8 x 25.4 x 11)	3000 VAC rms	86%	ERM00CC110
20 W	24 (9 to 36 V)	5 V @ 4 A	2 x 1 x 0.43 in (50.8 x 25.4 x 11)	3000 VAC rms	85%	ERM04A18
	24 (9 to 36 V)	12 V @ 1.67 A	2 x 1 x 0.43 in (50.8 x 25.4 x 11)	3000 VAC rms	87%	ERM01B18
	24 (9 to 36 V)	15 V @ 1.33 A	2 x 1 x 0.43 in (50.8 x 25.4 x 11)	3000 VAC rms	87%	ERM01C18
	24 (9 to 36 V)	24 V @ 0.833 A	2 x 1 x 0.43 in (50.8 x 25.4 x 11)	3000 VAC rms	86%	ERM01H18
	24 (9 to 36 V)	±12 V @ 0.833 A	2 x 1 x 0.43 in (50.8 x 25.4 x 11)	3000 VAC rms	86%	ERM01BB18
	24 (9 to 36 V)	±15 V @ 0.667 A	2 x 1 x 0.43 in (50.8 x 25.4 x 11)	3000 VAC rms	86%	ERM01CC18
	48 (18 to 75 V)	5 V @ 4 A	2 x 1 x 0.43 in (50.8 x 25.4 x 11)	3000 VAC rms	85%	ERM04A36
	48 (18 to 75 V)	12 V @ 1.67 A	2 x 1 x 0.43 in (50.8 x 25.4 x 11)	3000 VAC rms	87%	ERM01B36
	48 (18 to 75 V)	15 V @ 1.33 A	2 x 1 x 0.43 in (50.8 x 25.4 x 11)	3000 VAC rms	87%	ERM01C36
	48 (18 to 75 V)	24 V @ 0.833 A	2 x 1 x 0.43 in (50.8 x 25.4 x 11)	3000 VAC rms	86%	ERM01H36
	48 (18 to 75 V)	±12 V @ 0.833 A	2 x 1 x 0.43 in (50.8 x 25.4 x 11)	3000 VAC rms	87%	ERM01BB36
	48 (18 to 75 V)	±15 V @ 0.667 A	2 x 1 x 0.43 in (50.8 x 25.4 x 11)	3000 VAC rms	86%	ERM01CC36
	72, 110 (40 to 160 V)	5 V @ 4 A	2 x 1 x 0.43 in (50.8 x 25.4 x 11)	3000 VAC rms	83%	ERM04A110
	72, 110 (40 to 160 V)	12 V @ 1.67 A	2 x 1 x 0.43 in (50.8 x 25.4 x 11)	3000 VAC rms	86%	ERM01B110
	72, 110 (40 to 160 V)	15 V @ 1.33 A	2 x 1 x 0.43 in (50.8 x 25.4 x 11)	3000 VAC rms	86%	ERM01C110
	72, 110 (40 to 160 V)	24 V @ 0.833 A	2 x 1 x 0.43 in (50.8 x 25.4 x 11)	3000 VAC rms	85%	ERM01H110
	72, 110 (40 to 160 V)	±12 V @ 0.833 A	2 x 1 x 0.43 in (50.8 x 25.4 x 11)	3000 VAC rms	86%	ERM01BB110
	72, 110 (40 to 160 V)	±15 V @ 0.667 A	2 x 1 x 0.43 in (50.8 x 25.4 x 11)	3000 VAC rms	86%	ERM01CC110

## LOW POWER ISOLATED DC-DC PRODUCT

DC-DC Converter for Railway Applications						
	Input Voltage	Output	Package (mm)	I/O Isolation	Efficiency	Model Number
50 W	72 (43 to 101 V)	5 V @ 10 A	2.28 x 1.45 x 0.5 in (57.9 x 36.8 x 12.7)	3000 VAC rms	90%	ERM10A72
	72 (43 to 101 V)	12 V @ 4.17 A	2.28 x 1.45 x 0.5 in (57.9 x 36.8 x 12.7)	3000 VAC rms	92%	ERM04B72
	72 (43 to 101 V)	15 V @ 3.33 A	2.28 x 1.45 x 0.5 in (57.9 x 36.8 x 12.7)	3000 VAC rms	92%	ERM03C72
	72 (43 to 101 V)	24 V @ 2.08 A	2.28 x 1.45 x 0.5 in (57.9 x 36.8 x 12.7)	3000 VAC rms	91%	ERM02H72
	110 (66 to 160 V)	5 V @ 10 A	2.28 x 1.45 x 0.5 in (57.9 x 36.8 x 12.7)	3000 VAC rms	90%	ERM10A110
	110 (66 to 160 V)	12 V @ 4.17 A	2.28 x 1.45 x 0.5 in (57.9 x 36.8 x 12.7)	3000 VAC rms	91%	ERM04B110
	110 (66 to 160 V)	15 V @ 3.33 A	2.28 x 1.45 x 0.5 in (57.9 x 36.8 x 12.7)	3000 VAC rms	92%	ERM03C110
	110 (66 to 160 V)	24 V @ 2.08 A	2.28 x 1.45 x 0.5 in (57.9 x 36.8 x 12.7)	3000 VAC rms	91%	ERM02H110
75 W	72 (43 to 101 V)	5 V @ 15 A	2.28 x 1.45 x 0.5 in (57.9 x 36.8 x 12.7)	3000 VAC rms	89%	ERM15A72
	72 (43 to 101 V)	12 V @ 6.25 A	2.28 x 1.45 x 0.5 in (57.9 x 36.8 x 12.7)	3000 VAC rms	92%	ERM06B72
	72 (43 to 101 V)	15 V @ 5 A	2.28 x 1.45 x 0.5 in (57.9 x 36.8 x 12.7)	3000 VAC rms	92%	ERM05C72
	72 (43 to 101 V)	24 V @ 3.125 A	2.28 x 1.45 x 0.5 in (57.9 x 36.8 x 12.7)	3000 VAC rms	91%	ERM03H72
	110 (66 to 160 V)	5 V @ 15 A	2.28 x 1.45 x 0.5 in (57.9 x 36.8 x 12.7)	3000 VAC rms	89%	ERM15A110
	110 (66 to 160 V)	12 V @ 6.25 A	2.28 x 1.45 x 0.5 in (57.9 x 36.8 x 12.7)	3000 VAC rms	91%	ERM06B110
	110 (66 to 160 V)	15 V @ 5 A	2.28 x 1.45 x 0.5 in (57.9 x 36.8 x 12.7)	3000 VAC rms	91%	ERM05C110
	110 (66 to 160 V)	24 V @ 3.125 A	2.28 x 1.45 x 0.5 in (57.9 x 36.8 x 12.7)	3000 VAC rms	90%	ERM03H110
100 W	110 (36 to 160 V)	5 V @ 20 A	2.3 x 1.47 x 0.67 in (58.4 x 37.3 x 17.0)	2000 VDC	91.5%	ERM20A100
	110 (36 to 160 V)	12 V @ 8.4 A	2.3 x 1.47 x 0.67 in (58.4 x 37.3 x 17.0)	2000 VDC	91%	ERM08B100
	110 (36 to 160 V)	15 V @ 6.7 A	2.3 x 1.47 x 0.67 in (58.4 x 37.3 x 17.0)	2000 VDC	90.5%	ERM06C100
	110 (36 to 160 V)	24 V @ 4.2 A	2.3 x 1.47 x 0.67 in (58.4 x 37.3 x 17.0)	2000 VDC	89%	ERM04H100
	110 (36 to 160 V)	54 V @ 1.85 A	2.3 x 1.47 x 0.67 in (58.4 x 37.3 x 17.0)	2000 VDC	89%	ERM01U100
150 W	110 (36 to 160 V)	5 V @ 27 A	2.3 x 1.47 x 0.67 in (58.4 x 37.3 x 17.0)	2000 VDC	90%	ERM30A100
	110 (36 to 160 V)	12 V @ 8.4 A	2.3 x 1.47 x 0.67 in (58.4 x 37.3 x 17.0)	2000 VDC	90%	ERM12B100
	110 (36 to 160 V)	15 V @ 6.7 A	2.3 x 1.47 x 0.67 in (58.4 x 37.3 x 17.0)	2000 VDC	89%	ERM10C100
	110 (36 to 160 V)	24 V @ 4.2 A	2.3 x 1.47 x 0.67 in (58.4 x 37.3 x 17.0)	2000 VDC	88%	ERM06H100
	110 (36 to 160 V)	54 V @ 1.85 A	2.3 x 1.47 x 0.67 in (58.4 x 37.3 x 17.0)	2000 VDC	88.5%	ERM02U100

# DC-DC Converter for Medical Applications



## SPECIAL FEATURES

- Medical Safety to UL / CSA / IEC / EN 60601-1 3rd Edition
- 4200 VAC reinforced insulation
- 2 MOOP rated
- Low leakage current
- Operating Temperature Range -40 to +85°C (with derating)
- Input filter meet EN 55022, Class A and FCC, Level A
- 3-year product warranty

DC-DC Converter for Medical Applications							
	Input Voltage	Output 1 Voltage	Output 2 Voltage	Package L x W x H (mm)	I/O Isolation	Efficiency	Model Number
5 W	9 to 18 V	5 V @ 1 A		1.25 x 0.8 x 0.41 in (31.8 x 20.3 x 10.5)	4200 VAC rms	75%	ASA01A12-M
	18 to 36 V	5 V @ 1 A		1.25 x 0.8 x 0.41 in (31.8 x 20.3 x 10.5)	4200 VAC rms	77%	ASA01A24-M
	36 to 75 V	5 V @ 1 A		1.25 x 0.8 x 0.41 in (31.8 x 20.3 x 10.5)	4200 VAC rms	77%	ASA01A48-M
6 W	9 to 18 V	12 V @ 0.5 A		1.25 x 0.8 x 0.41 in (31.8 x 20.3 x 10.5)	4200 VAC rms	78%	ASA01B12-M
	9 to 18 V	12 V @ 0.25 A	-12 V @ 0.25 A	1.25 x 0.8 x 0.41 in (31.8 x 20.3 x 10.5)	4200 VAC rms	78%	ASA01BB12-M
	9 to 18 V	15 V @ 0.2 A	-15 V @ 0.2 A	1.25 x 0.8 x 0.41 in (31.8 x 20.3 x 10.5)	4200 VAC rms	78%	ASA01CC12-M
	18 to 36 V	12 V @ 0.5 A		1.25 x 0.8 x 0.41 in (31.8 x 20.3 x 10.5)	4200 VAC rms	80%	ASA01B24-M
	18 to 36 V	12 V @ 0.25 A	-12 V @ 0.25 A	1.25 x 0.8 x 0.41 in (31.8 x 20.3 x 10.5)	4200 VAC rms	80%	ASA01BB24-M
	18 to 36 V	15 V @ 0.2 A	-15 V @ 0.2 A	1.25 x 0.8 x 0.41 in (31.8 x 20.3 x 10.5)	4200 VAC rms	80%	ASA01CC24-M
	36 to 75 V	12 V @ 0.5 A		1.25 x 0.8 x 0.41 in (31.8 x 20.3 x 10.5)	4200 VAC rms	80%	ASA01B48-M
	36 to 75 V	12 V @ 0.25 A	-12 V @ 0.25 A	1.25 x 0.8 x 0.41 in (31.8 x 20.3 x 10.5)	4200 VAC rms	80%	ASA01BB48-M
	36 to 75 V	15 V @ 0.2 A	-15 V @ 0.2 A	1.25 x 0.8 x 0.41 in (31.8 x 20.3 x 10.5)	4200 VAC rms	80%	ASA01CC48-M
15 W	9 to 18 V	5 V @ 3 A		2 x 1 x 0.47 in (50.8 x 25.4 x 12)	4200 VAC rms	85%	AEE03A12-M
	9 to 18 V	12 V @ 1.25 A		2 x 1 x 0.47 in (50.8 x 25.4 x 12)	4200 VAC rms	89%	AEE01B12-M
	9 to 18 V	15 V @ 1 A		2 x 1 x 0.47 in (50.8 x 25.4 x 12)	4200 VAC rms	88%	AEE01C12-M
	9 to 18 V	24 V @ 0.625 A		2 x 1 x 0.47 in (50.8 x 25.4 x 12)	4200 VAC rms	88%	AEE01H12-M
	9 to 18 V	12 V @ 0.625 A	-12 V @ 0.625 A	2 x 1 x 0.47 in (50.8 x 25.4 x 12)	4200 VAC rms	88%	AEE01BB12-M
	9 to 18 V	15 V @ 0.5 A	-15 V @ 0.5 A	2 x 1 x 0.47 in (50.8 x 25.4 x 12)	4200 VAC rms	89%	AEE01CC12-M
	18 to 36 V	5 V @ 3 A		2 x 1 x 0.47 in (50.8 x 25.4 x 12)	4200 VAC rms	87%	AEE03A24-M
	18 to 36 V	12 V @ 1.25 A		2 x 1 x 0.47 in (50.8 x 25.4 x 12)	4200 VAC rms	89%	AEE01B24-M
	18 to 36 V	15 V @ 1 A		2 x 1 x 0.47 in (50.8 x 25.4 x 12)	4200 VAC rms	88%	AEE01C24-M
	18 to 36 V	24 V @ 0.625 A		2 x 1 x 0.47 in (50.8 x 25.4 x 12)	4200 VAC rms	90%	AEE01H24-M
	18 to 36 V	12 V @ 0.625 A	-12 V @ 0.625 A	2 x 1 x 0.47 in (50.8 x 25.4 x 12)	4200 VAC rms	90%	AEE01BB24-M
	18 to 36 V	15 V @ 0.5 A	-15 V @ 0.5 A	2 x 1 x 0.47 in (50.8 x 25.4 x 12)	4200 VAC rms	89%	AEE01CC24-M
	36 to 75 V	5 V @ 3 A		2 x 1 x 0.47 in (50.8 x 25.4 x 12)	4200 VAC rms	88%	AEE03A48-M
	36 to 75 V	12 V @ 1.25 A		2 x 1 x 0.47 in (50.8 x 25.4 x 12)	4200 VAC rms	88%	AEE01B48-M
	36 to 75 V	15 V @ 1 A		2 x 1 x 0.47 in (50.8 x 25.4 x 12)	4200 VAC rms	87%	AEE01C48-M
	36 to 75 V	24 V @ 0.625 A		2 x 1 x 0.47 in (50.8 x 25.4 x 12)	4200 VAC rms	88%	AEE01H48-M
	36 to 75 V	12 V @ 0.625 A	-12 V @ 0.625 A	2 x 1 x 0.47 in (50.8 x 25.4 x 12)	4200 VAC rms	88%	AEE01BB48-M
	36 to 75 V	15 V @ 0.5 A	-15 V @ 0.5 A	2 x 1 x 0.47 in (50.8 x 25.4 x 12)	4200 VAC rms	88%	AEE01CC48-M

# DC-DC Converter for Medical Applications

Medical Safety to UL / CSA / IEC / EN 60601-1


3rd Edition



AEE20W

DC-DC Converter for Medical Applications							
	Input Voltage	Output 1 Voltage	Output 2 Voltage	Package L x W x H (mm)	I/O Isolation	Efficiency	Model Number
20 W	9 to 18 V	5 V @ 4 A		2 x 1 x 0.47 in (50.8 x 25.4 x 12)	4200 VAC rms	85%	AEE04A12-M
	9 to 18 V	12 V @ 1.67 A		2 x 1 x 0.47 in (50.8 x 25.4 x 12)	4200 VAC rms	89%	AEE02B12-M
	9 to 18 V	15 V @ 1.33 A		2 x 1 x 0.47 in (50.8 x 25.4 x 12)	4200 VAC rms	88%	AEE02C12-M
	9 to 18 V	24 V @ 0.84 A		2 x 1 x 0.47 in (50.8 x 25.4 x 12)	4200 VAC rms	89%	AEE02H12-M
	9 to 18 V	12 V @ 0.84 A	-12 V @ 0.84 A	2 x 1 x 0.47 in (50.8 x 25.4 x 12)	4200 VAC rms	89%	AEE02BB12-M
	9 to 18 V	15 V @ 0.67 A	-15 V @ 0.67 A	2 x 1 x 0.47 in (50.8 x 25.4 x 12)	4200 VAC rms	89%	AEE02CC12-M
	18 to 36 V	5 V @ 4 A		2 x 1 x 0.47 in (50.8 x 25.4 x 12)	4200 VAC rms	87%	AEE04A24-M
	18 to 36 V	12 V @ 1.67 A		2 x 1 x 0.47 in (50.8 x 25.4 x 12)	4200 VAC rms	89%	AEE02B24-M
	18 to 36 V	15 V @ 1.33 A		2 x 1 x 0.47 in (50.8 x 25.4 x 12)	4200 VAC rms	88%	AEE02C24-M
	18 to 36 V	24 V @ 0.84 A		2 x 1 x 0.47 in (50.8 x 25.4 x 12)	4200 VAC rms	90%	AEE02H24-M
	18 to 36 V	12 V @ 0.84 A	-12 V @ 0.84 A	2 x 1 x 0.47 in (50.8 x 25.4 x 12)	4200 VAC rms	90%	AEE02BB24-M
	18 to 36 V	15 V @ 0.67 A	-15 V @ 0.67 A	2 x 1 x 0.47 in (50.8 x 25.4 x 12)	4200 VAC rms	89%	AEE02CC24-M
	36 to 75 V	5 V @ 4 A		2 x 1 x 0.47 in (50.8 x 25.4 x 12)	4200 VAC rms	88%	AEE04A48-M
	36 to 75 V	12 V @ 1.67 A		2 x 1 x 0.47 in (50.8 x 25.4 x 12)	4200 VAC rms	89%	AEE02B48-M
	36 to 75 V	15 V @ 1.33 A		2 x 1 x 0.47 in (50.8 x 25.4 x 12)	4200 VAC rms	88%	AEE02C48-M
	36 to 75 V	24 V @ 0.84 A		2 x 1 x 0.47 in (50.8 x 25.4 x 12)	4200 VAC rms	88%	AEE02H48-M
	36 to 75 V	12 V @ 0.84 A	-12 V @ 0.84 A	2 x 1 x 0.47 in (50.8 x 25.4 x 12)	4200 VAC rms	88%	AEE02BB48-M
	36 to 75 V	15 V @ 0.67 A	-15 V @ 0.67 A	2 x 1 x 0.47 in (50.8 x 25.4 x 12)	4200 VAC rms	89%	AEE02CC48-M

# Mission-Critical High Voltage Solutions for Demanding Applications

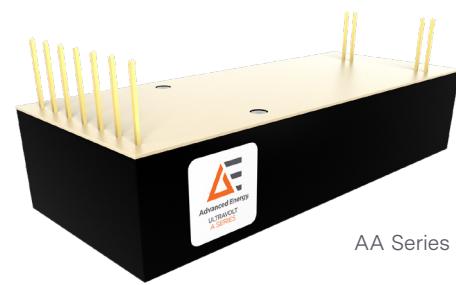

AA Series

## STANDARD, CONFIGURABLE MODULES

- Exceptionally wide input and output operating ranges
- Products to 250 W, paralleled to 1000 W
- Advanced arc handling
- RoHS compliance

## BENEFITS

- Proven solutions, higher reliability
- Lower initial cost
- Excellent power quality
- Shorter lead times, faster integration
- Easy interfacing: digital ready

Mission-Critical High Voltage Solutions for Demanding Applications							
Series	Power (W)	Input Voltage	Output Voltage	Package L x W x H (mm)	I/O Isolation	Model Number (Examples)	Special Features
A Series	4, 15, 20, or 30	12 V on 4 W 24 V on 20, or 30 W	62 V to 20 kV	1/16 to 6 A Series: 94 x 38.1 x 20.7 10 A Series: 94.6 x 38.7 x 24.5 15 A Series: 119.4 x 38.7 x 24.5 20 A Series: 144.8 x 38.7 x 27.4	No	1/16A12-P4 20A24-N30-1	<ul style="list-style-type: none"> <li>■ Configurable high voltage output, power and polarity</li> <li>■ Available 0 to 5 VDC or 0 to 10 VDC (full-scale) analog interfaces</li> <li>■ Control and monitoring of high voltage output and current</li> <li>■ Wide selection of electrical, shielding and mechanical integration options</li> <li>■ Ripple performance as low at 100 ppm</li> </ul>
AA Series	4, 20, or 30	12 V on 4 W 24 V on 20, or 30 W	62 V to 6 kV	75.4 x 38.1 x 20.5	No	1/16AA24-P20 6AA12-N4	<ul style="list-style-type: none"> <li>■ Configurable high voltage output, power, and polarity in a common footprint</li> <li>■ Available 0 to 5 VDC or 0 to 10 VDC (full-scale) analog interfaces</li> <li>■ Control and monitoring of high voltage output and current</li> <li>■ Selection of electrical, shielding, and mechanical integration options</li> <li>■ Ripple performance as low as 100 ppm (0.05 Vpp)</li> </ul>
C Series	20 or 30	24 V	125 V to 6 kV	94 x 38.1 x 19.6	No	1/8C24-N20 6C24-P30	<ul style="list-style-type: none"> <li>■ Fast-rise charging power delivered from an optimized design</li> <li>■ Limited overshoot, typically less than 1% of high voltage setpoint, depending on the application</li> <li>■ Configurable high-voltage out, power and polarity in a common, compact footprint</li> <li>■ Full-range control and monitoring of high-voltage output and current</li> <li>■ Selection of electrical, shielding and mechanical integration options</li> </ul>
Dual Polarity C Series	125 or 250	24 V	125 V to 6 kV	203.2 x 114.3 x 27.4	No	1/8C24-NP125 6C24-NP250	<ul style="list-style-type: none"> <li>■ Fast-rise charging power delivered from an optimized design</li> <li>■ Limited overshoot, typically less than 1% of high voltage setpoint, depending on the application</li> <li>■ Fully-integrated dual output package</li> <li>■ Full-range control and monitoring of high voltage output and current</li> <li>■ Selection of electrical and mechanical integration options</li> </ul>

## HIGH VOLTAGE POWER SUPPLIES

Mission-Critical High Voltage Solutions for Demanding Applications							
Series	Power (W)	Input Voltage	Output Voltage	Package L x W x H (mm)	I/O Isolation	Model Number (Examples)	Special Features
EFL Series	12,24, or 36	12 V or 24 V	12 V or 24 V	15EFL Series: 144.8 x 38.1 x 33 30EFL Series: 177.6 x 41.3 x 38.1	Yes	15EFL12-12W-I/O-RB 30EFL24-36W-I/O-RB	<ul style="list-style-type: none"> <li>■ Precision analog control</li> <li>■ Linearity of <math>\pm 0.05\%</math> and accuracy of <math>\pm 0.2\%</math></li> <li>■ 10ppm temperature coefficient</li> <li>■ Isolated up to 15 kV or 30 kV</li> <li>■ Isolation resistance of 150 G<math>\Omega</math> (15 kV) or 2 G<math>\Omega</math> (30 kV)</li> <li>■ 4 regulated floating LV power outputs</li> <li>■ Isolated digital and analog I/O to and from floating hot deck</li> </ul>
FL Series	12 or 24	12 V or 24 V	12 V or 24 V	144.8 x 38.1 x 29.8	Yes	15FL12-12W	<ul style="list-style-type: none"> <li>■ Isolated up to 15 kV</li> <li>■ DC leakage current of <math>&lt; 10\text{ nA}</math></li> <li>■ AC leakage capacitance of <math>&lt; 40\text{ pF}</math></li> <li>■ 3 regulated floating LV power outputs</li> <li>■ Isolated digital I/O to and from floating hot deck</li> <li>■ Isolated analog I/O to and from floating hot deck</li> <li>■ UL/cUL Recognized Component; CE Mark (LVD &amp; RoHS)</li> </ul>
High Power C Series	60, 125, 250	24 V	125 V to 60 kV	1/8C to 6C 60&125 W: 114.3 x 101.6 x 27 1/8C to 6C 250 W: 203.2 x 114.3 x 27 8C to 30C 60&125 W: 203.2 x 114.3 x 27 8C to 30C 250 W: 235 x 114.3 x 51.6 40C to 60C: 355.6 x 114.3 x 63.5	No	1/8C24-N125 6C24-P250 8C24-P60 30C24-N125 50C24-P250	<ul style="list-style-type: none"> <li>■ Fast-rise charging power delivered from an optimized design</li> <li>■ Limited overshoot, typically less than 1% of high voltage setpoint, depending on the application</li> <li>■ High power-to-package size ratio</li> <li>■ Full-featured analog interface includes voltage/current controls and monitors</li> <li>■ Selection of electrical and mechanical integration options</li> </ul>
HVA	1, 1.5, or 2	24 V	1 kV to 20 kV	Small: 152.4 x 96.8 x 31.8 Large: 247.7 x 165.1 x 38.1	No	1HVA24-P1 20HVA24-BP1	<ul style="list-style-type: none"> <li>■ Full-range two- and four-quadrant output of voltage and current for bias, amplification or reversing</li> <li>■ Fast voltage slew rates and broad bandwidths up to 500 Hz</li> <li>■ Sources and sinks output current through operating range</li> <li>■ High voltage output controlled using differential analog inputs</li> <li>■ Compact size with electrical performance and mechanical integration options</li> </ul>
LE Series	4, 15 (10 and 30 only), 20 (1 to 6 only), 30	24 V	1 kV to 30 kV	1-15 kV: 152.4 x 96.77 x 38.15 20-30 kV: 184.91 x 100 x 38.16	No	1LE24-P4 30LE24-N30	<ul style="list-style-type: none"> <li>■ Low ripple output performance</li> <li>■ Available temperature coefficient to 25 ppm/<math>^{\circ}\text{C}</math> (optional 10 ppm/<math>^{\circ}\text{C}</math> 1LE to 15LE only) with line regulation less than 25 ppm</li> <li>■ High voltage output control via differential analog inputs</li> <li>■ Full-featured 0 to 10 VDC control; interface includes voltage/current controls and monitors</li> <li>■ Electrical performance and mechanical integration options</li> </ul>

Mission-Critical High Voltage Solutions for Demanding Applications							
Series	Power (W)	Input Voltage	Output Voltage	Package L x W x H (mm)	I/O Isolation	Model Number (Examples)	Special Features
D Series	1, 2, 4, or 6	15 V or 24 V	1 kV to 6 kV	1 to 4 kV, up to 4 W: 63.5 x 44 x 13 1 to 6 kV, 6 W: 63.5 x 44 x 17.5	No	1D15-N1 6D24-P6	<ul style="list-style-type: none"> <li>■ Small-footprint, PCB-mountable package</li> <li>■ High voltage control and monitoring accuracy better than 0.2%</li> <li>■ Analog interface with integral voltage control and voltage/current monitors</li> <li>■ Over-temperature protection disables output if module case &gt; 75°C</li> <li>■ Reversed polarity, short-circuit/arc, and over-current protection</li> </ul>
M Series	0.5, 0.8, or 1	600 V to 1.5 kV: 12, 15, or 24 2 kV to 3 kV: 5, 15, or 24	600 V to 3 kV	47 x 28 x 12.5	No	0.6M0.5-P0.5 3M24-N1	<ul style="list-style-type: none"> <li>■ Low profile, lightweight, PCB-mountable package</li> <li>■ Wide selection of input and output voltage configurations</li> <li>■ Low output ripple, temperature coefficient, and line regulation (Analog interface with integral voltage control and voltage/current monitors)</li> <li>■ Integrated reverse input polarity, short-circuit/arc, and over-current protection</li> </ul>
MPM Series	1.5 W	12 or 24	100 V to 3 kV	38.1 x 38.1 x 20.1	No	MPM12-100N MPM24-3KP	<ul style="list-style-type: none"> <li>■ Single pin provides both module power and control of high voltage output</li> <li>■ Compact, low-profile, PCB-mountable package</li> <li>■ Selection of high voltage outputs: 100 to 3000 VDC, positive or negative polarity</li> <li>■ Input polarity protection; output protection from intermittent open- or short-circuits</li> <li>■ Available input/output isolation to 100 VDC, metal shielding options</li> </ul>
US Series	100 mW	5, 12	200 V to 500 V	25.5 x 20.5 x 11	No	0.5US5-P0.1	<ul style="list-style-type: none"> <li>■ Small, lightweight, PCB-mountable package (5.8 cm<sup>3</sup>, 13 g)</li> <li>■ Low output ripple, temperature coefficient, and line regulation (Analog interface with output voltage control and monitoring)</li> <li>■ Integrated over-current and short circuit/arc protection</li> <li>■ Tin-plated metal enclosure</li> </ul>
V Series	0.5, 0.8, or 1	600 V to 1.5 kV: 12, 15, or 24 2 kV to 3 kV: 5, 15, or 24	600 V to 3 kV	46 x 12 x 24.6	No	0.6V0.5-P0.5 3V24-N1	<ul style="list-style-type: none"> <li>■ Small-footprint, lightweight, PCB-mountable package</li> <li>■ Wide selection of input and output voltage configurations</li> <li>■ Low output ripple, temperature coefficient, and line regulation (Analog interface with integral voltage control and voltage/current monitors)</li> <li>■ Integrated reverse polarity, short-circuit/arc, and overcurrent protection</li> </ul>
AEQ Series	500 mW	5	Up to 600 V (single) or ±300 V (dual)	25.4 x 25.4 x 25.4	Yes	AEQ5-300FL0.5	<ul style="list-style-type: none"> <li>■ Ultra-miniature size (0.5" cube)</li> <li>■ Adjustable 0 to ±300 VDC (dual polarity units with CT), 0 to 600 VDC (floating/reversible units)</li> <li>■ +5 or +12 VDC input</li> <li>■ ±1500 VDC @ 0.5 W, ±1750 VDC @ 1.25 W input to output isolation</li> <li>■ Tin-plated metal enclosure</li> </ul>

## Rapid Modified Standards Solutions

Time-to-market, reliability and costs have the greatest impact on your ROI. Fully custom solutions can delay your time-to-market and undermine your competitive advantage. Avoid paying custom development costs with an Advanced Energy modified standard power supply.

While Advanced Energy's Artesyn, Excelsys and UltraVolt product lines offer a broad range of standard products that address the needs of many industries, there are occasions when a standard product does not address all your application requirements. A custom solution may not be economical or meet scheduling needs. By using proven standard platforms as building blocks, Advanced Energy can develop cost-effective turnkey power solutions that meet your exact needs.

### Modified Advantage

What you will get from Advanced Energy modified power supplies:

- Broad portfolio of power supplies to leverage from
- Quick time to market vs. custom solutions
- Low risk – using proven reliable platforms as building blocks
- Cost effective (lower development cost)
- Quality, high reliability products

## Modified Solutions

Advanced Energy provides modified standard products and value-add solutions in varying degrees of complexity. These meet specific customer needs in a wide range of applications, such as:



### Communications

- Access solutions
- Enterprise networking
- Wireless
- Wireline
- Optical

### Healthcare

- Bio life sciences
- Dental
- Imaging
- Laboratory
- Medical

### Industrial

- Process control
- Robotics
- Test & measurement

### Lighting & Signage

- Displays
- Illuminated signs

### Aero

- Avionics
- In-flight entertainment



## Capabilities

The exact specifications you require within your budget and reliability standards.



### Electrical Parameters

- Factory out preset
- Low noise
- Power & efficiency upgrades
- Hot swap control
- Inrush current control
- Integrated PDU assemblies
- Compliance to industry standards



### Packaging

- Conformal coating
- Custom chassis/sled
- Ruggedization for shock, vibration, and hazardous locations
- Shielding for high magnetic environment
- Sealed/IP rated enclosures
- Customized print/markings/labels



### Connectivity

- Cable wire assemblies
- Connector changes
- Busbar design
- Overmolding
- Interposer boards



### Communications & Control

- Logic signal/timing changes
- Adaptive fan control
- Output sequencing
- Peak load/efficiency optimization

## ABOUT ADVANCED ENERGY

Advanced Energy (AE) has devoted more than four decades to perfecting power for its global customers. We design and manufacture highly engineered, precision power conversion, measurement and control solutions for mission-critical applications and processes.

Our products enable customer innovation in complex applications for a wide range of industries including semiconductor equipment, industrial, manufacturing, telecommunications, data center computing, and medical. With deep applications know-how and responsive service and support across the globe, we build collaborative partnerships to meet rapid technological developments, propel growth for our customers, and innovate the future of power.



For international contact information,  
visit [advancedenergy.com](http://advancedenergy.com).

[powersales@aei.com](mailto:powersales@aei.com)  
+1 888 412 7832

PRECISION | POWER | PERFORMANCE | TRUST

---

Specifications are subject to change without notice. Not responsible for errors or omissions. ©2026 Advanced Energy Industries, Inc. All rights reserved. Advanced Energy®, AE®, CoolX®, and HV Rack® are U.S. trademarks of Advanced Energy Industries, Inc. PMBus™ is a trademark of SMIF, Inc.